


## Parallel Type Air Gripper

# Series *MHZ*

ø6, ø10, ø16, ø20, ø25, ø32, ø40

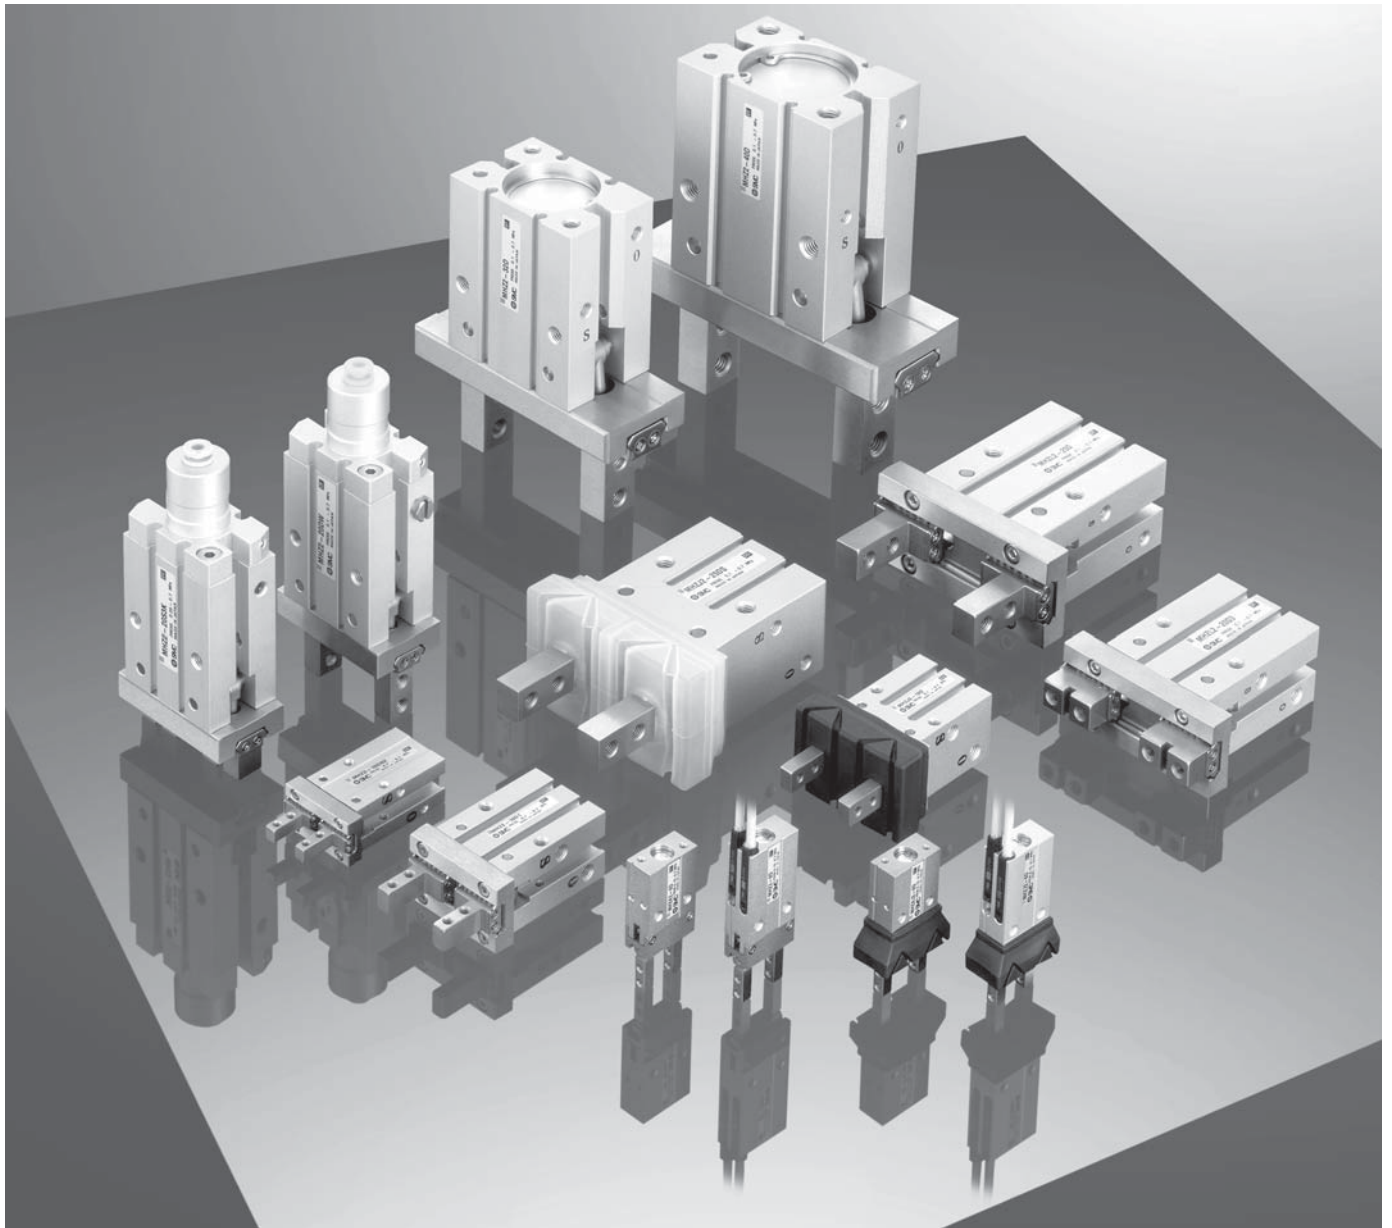

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto  
Switch

Series upgraded with the addition of new models  
and expanded size variations




- Long stroke/MHZL2 and compact series/MHZA□2-6 introduced
  - ø6, ø32 and ø40 added to standard MHZ2
  - ø6 added to MHZJ2 with dust cover

# Integral linear guide used for high

• **Linear guide slippage prevention**

Guide slippage is prevented by two positioning dowel pins.


• **Repeatability: ±0.01mm**

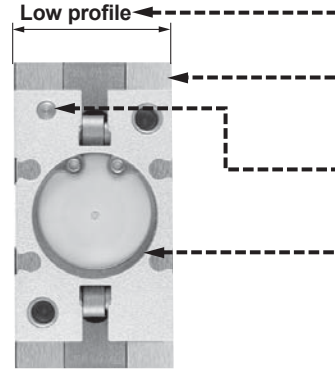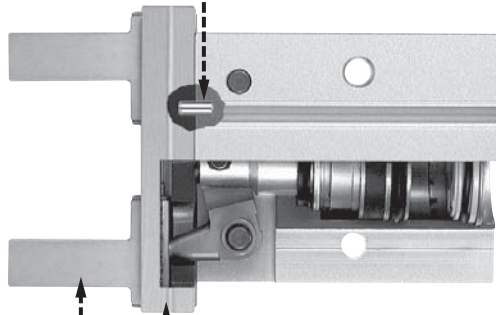


• **Martensitic stainless steel**

**High degree of mounting flexibility**

Can be mounted five ways from three directions.

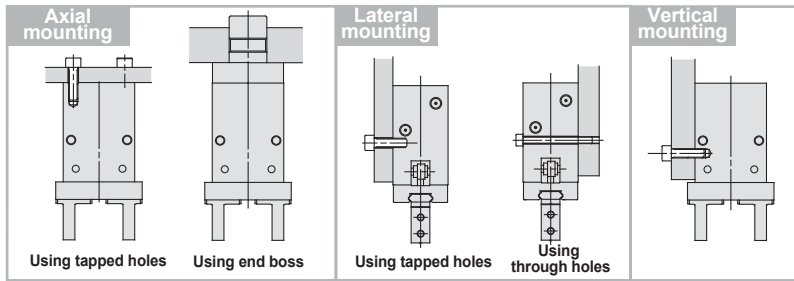

**Finger positions can be selected**  
(Standard type/MHZ2)

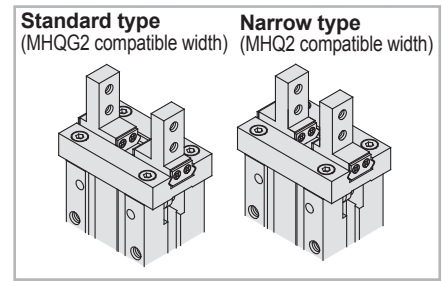

**Series Variations**

Series	Bore size (mm)	Action	Body options							Finger options			
			Basic type		End boss type					Basic type (tapped in open/close direction)	Side tapped	Through holes in open/close direction	Flat type fingers
			Side ported	Side ported	With One-touch fitting for coaxial tube	With One-touch fitting	With M3 port	With M5 port	With hose nipple				
<b>Compact series</b>													
Standard MHZA2-6	6	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
With dust cover MHZAJ2-6	6	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
Standard MHZ2	6	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
	10, 16 20, 25	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
	32, 40	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
Long stroke MHZL2	10, 16 20, 25	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
With dust cover MHZJ2	6	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
	10, 16 20, 25	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●

# rigidity and high precision



-- Body thickness tolerance:  $\pm 0.05\text{mm}$

-- No guide protrusion in direction of body thickness

-- Improved remounting accuracy  
Positioning dowel pin holes provided

-- Top mounting centering location  
Mounting is more secure with a depth 0.5 to 2mm greater than conventional types

## Integral guide rail construction

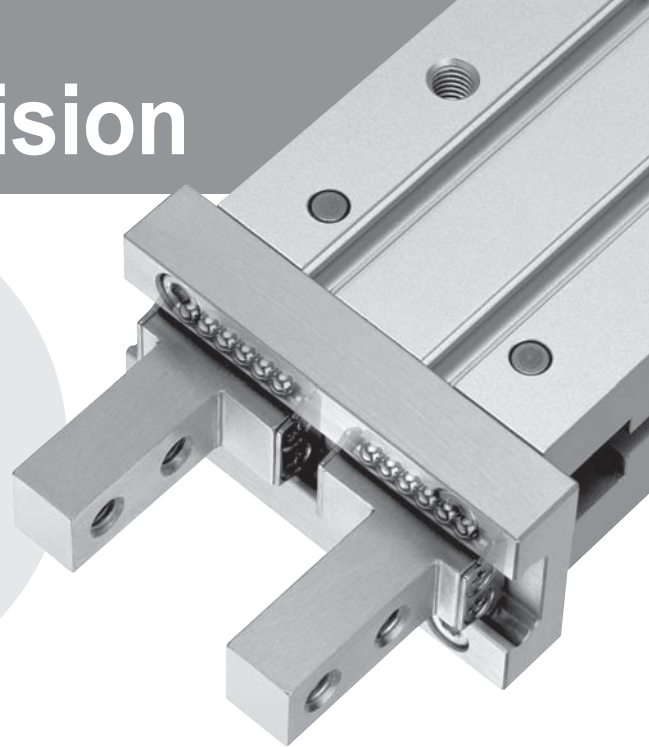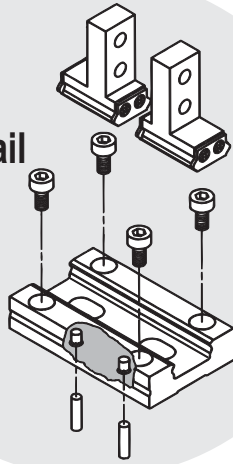

## Accommodates diverse work piece diameters with a single unit

- Nearly double the standard stroke
- Long strokes are also compact and light weight

Series	Opening/Closing stroke mm (Open — Closed)	Weight g	Body thickness mm
MHZL2-10	8 ( 4 )	60	16.4
MHZL2-16	12 ( 6 )	135	23.6
MHZL2-20	18 ( 10 )	270	27.6
MHZL2-25	22 ( 14 )	470	33.6

Values inside ( ) are for standard series MHZ2.

## Long strokes MHZL2



MHZ

MHQ

MHL2


MHR

MHK


MHS

## A wide variety of types and broad size variations

### Compact series (without auto switch)



### With dust cover ø10 to ø25

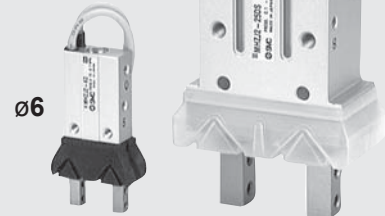

MHC2

MHT2


MHY2

MHW2

MRHQ

Auto Switch

### Standard type

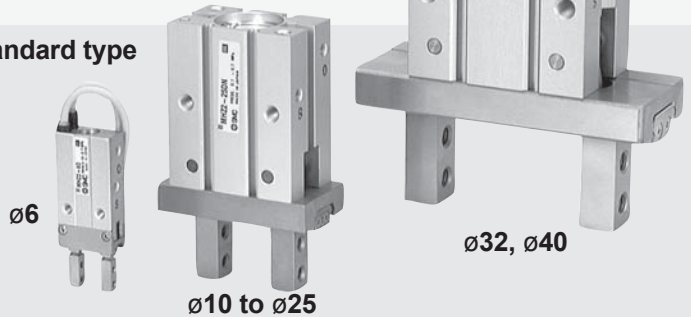

### Long stroke ø10 to ø25



# Compact Series (Without Auto Switch)

## Series *MHZA2-6/MHZAJ2-6*

### How to Order

**MHZA** 2 — 6 D □ □

**MHZAJ** 2 — 6 D □ □

With dust cover ●

Number of fingers ●

2 2 fingers

Bore size ●


6 6mm

Action ●


<b>D</b>	Double acting
<b>S</b>	Single acting (normally open)
<b>C</b>	Single acting (normally closed)

Finger option ●


[Standard type]  
Nil: Basic




1: Side tapped mounting



2: Through holes in opening/closing direction



3: Flat type fingers




● Dust cover type


<b>Nil</b>	Chloroprene rubber (CR)
<b>F</b>	Fluoro rubber (FKM)
<b>S</b>	Silicon rubber (Si)

● Body option


Nil: Basic




**E:** End boss type  
Side ported  
(double acting/single acting)




**K:** End boss type  
Axial port with  
ø4 One-touch fitting  
(single acting)

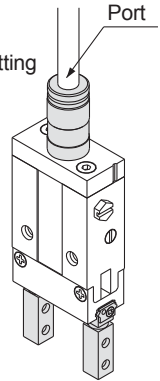


**H:** End boss type  
Axial port with  
ø4 hose nipple  
(single acting)



**M:** End boss type  
Axial M3 port  
(single acting)

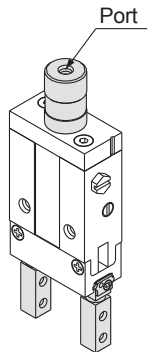

## Specifications

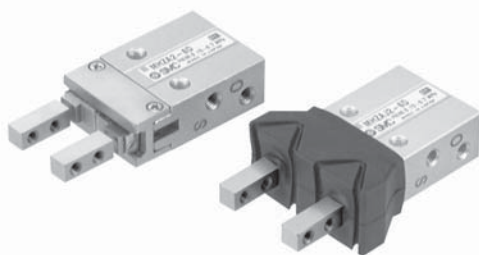


<b>Fluid</b>			Air
<b>Operating pressure</b>	<b>Double acting</b>		0.15 to 0.7MPa
	<b>Single acting</b>	Normally open	0.3 to 0.7MPa
Normally closed			
<b>Ambient and fluid temperature</b>			-10 to 60 °C
<b>Repeatability</b>			±0.01mm
<b>Maximum operating frequency</b>			180c.p.m.
<b>Lubrication</b>			Non-lube
<b>Action</b>			Double acting, Single acting


## Models

### Symbols:


#### Double acting type



#### Single acting type, normally open



#### Single acting type, normally closed



Action	Model	Bore size (mm)	Gripping force <sup>Note 1)</sup>		Opening/Closing stroke (both sides) mm	Weight g	
			Gripping force per finger Effective value N				
			External gripping force	Internal gripping force			
Double acting	MHZA2-6D	6	3.3	6.1	4	26	
	MHZAJ2-6D	6					
Single acting	Normally open	MHZA2-6S	1.9	—	4	26	
		MHZAJ2-6S					6
	Normally closed	MHZA2-6C	6	—	3.7	4	26
		MHZAJ2-6C	6				

Note 1) Values based on pressure of 0.5MPa, gripping point L = 20mm, at center of stroke.

## Options

### • Body options/End boss type

Symbol	Piping port position	Type of piping port	Applicable model	
		MHZA2-6/MHZAJ2-6	Double acting	Single acting
Nil	Standard	M3	●	●
E	Side ported	M3	●	●
K	Axial port	With ø4 One-touch fitting	—	●
H		With ø4 hose nipple	—	●
M		M3	—	●

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ



Auto Switch




# Series MHZA2-6/MHZAJ2-6

## Construction/Standard Type MHZA2-6


### Double acting/with fingers open

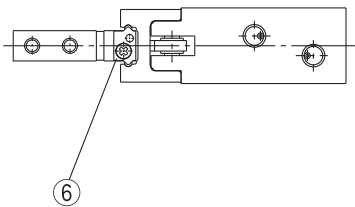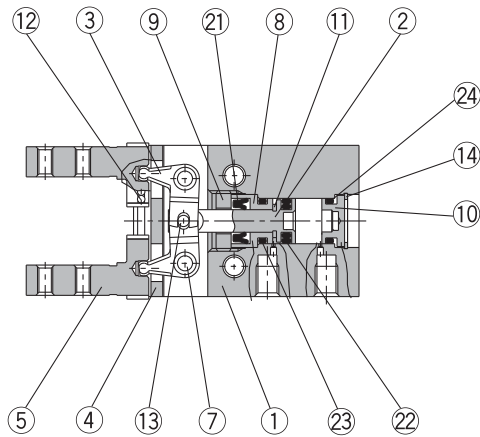


### Double acting/with fingers closed



### Single acting/normally open

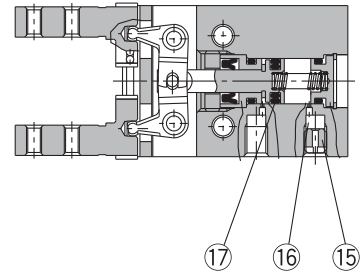

### Single acting/normally closed



#### Parts list

No.	Description	Material	Note
1	<b>Body</b>	Aluminum alloy	Hard anodized
2	<b>Piston</b>	Stainless steel	
3	<b>Lever</b>	Stainless steel	Heat treated
4	<b>Guide</b>	Stainless steel	Heat treated
5	<b>Finger</b>	Stainless steel	Heat treated
6	<b>Roller stopper</b>	Stainless steel	
7	<b>Lever shaft</b>	Stainless steel	Nitrided
8	<b>Holder</b>	Brass	Electroless nickel plated
9	<b>Holder lock</b>	Stainless steel	
10	<b>Cap</b>	Aluminum alloy	Clear anodized
11	<b>Bumper</b>	Urethane rubber	
12	<b>Steel balls</b>	High carbon chromium bearing steel	
13	<b>Needle roller</b>	High carbon chromium bearing steel	

#### Parts list

No.	Description	Material	Note
14	<b>C type snap ring</b>	Carbon steel	Nickel plated
15	<b>Exhaust plug</b>	Brass	Electroless nickel plated
16	<b>Exhaust filter</b>	Polyvinyl formal	
17	<b>N.O. spring</b>	Stainless steel spring wire	
18	<b>N.C. spring</b>	Stainless steel spring wire	
19	<b>N.C. holder</b>	Brass	Electroless nickel plated
20	<b>N.C. spacer</b>	Stainless steel	
21	<b>Rod seal</b>	NBR	
22	<b>Piston seal</b>	NBR	
23	<b>Gasket</b>	NBR	
24	<b>Gasket</b>	NBR	

#### Replacement parts: Seal kits


Seal kit no.	Description
MHZA6-PS	Kit includes items 21, 22, 23 and 24 from the table above.

\* Seal kits consist of items 21, 22, 23 and 24 in one kit, and can be ordered using the seal kit number.


Note) Contact SMC when replacing seals.

**Construction/With Dust Cover MHZAJ2-6**


**Double acting/with fingers open**

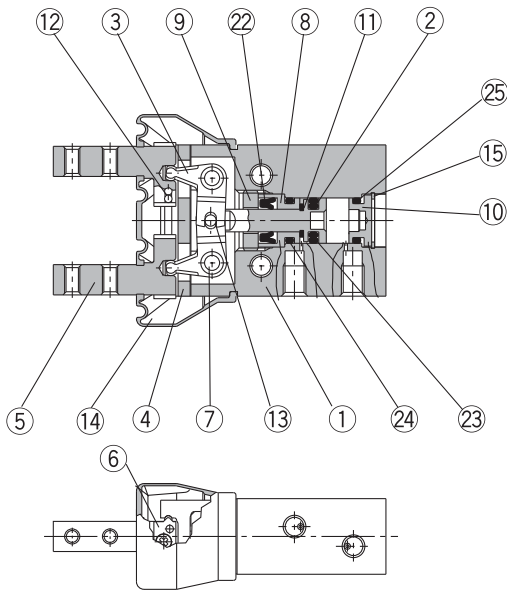


**Single acting/normally open**

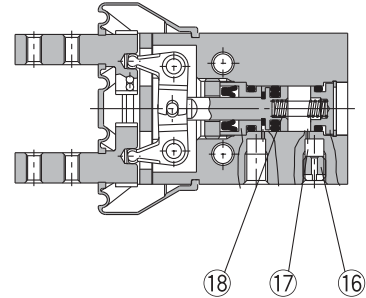

**Single acting/normally closed**



**Double acting/with fingers closed**



**Parts list**

No.	Description	Material	Note
1	<b>Body</b>	Aluminum alloy	Hard anodized
2	<b>Piston</b>	Stainless steel	
3	<b>Lever</b>	Stainless steel	Heat treated
4	<b>Guide</b>	Stainless steel	Heat treated
5	<b>Finger</b>	Stainless steel	Heat treated
6	<b>Roller stopper</b>	Stainless steel	
7	<b>Lever shaft</b>	Stainless steel	Nitrided
8	<b>Holder</b>	Brass	Electroless nickel plated
9	<b>Holder lock</b>	Stainless steel	
10	<b>Cap</b>	Aluminum alloy	Clear anodized
11	<b>Bumper</b>	Urethane rubber	
12	<b>Steel balls</b>	High carbon chromium bearing steel	
13	<b>Needle roller</b>	High carbon chromium bearing steel	

**Replacement parts: Seal kits**

Seal kit no.	Description
MHZAJ6-PS	Kit includes items 22, 23, 24 and 25 from the table above.

\* Seal kits consist of items 22, 23, 24 and 25 in one kit, and can be ordered using the seal kit number.

Note) Contact SMC when replacing seals.

**Parts list**

No.	Description	Material	Note
14	<b>Dust cover</b>	CR	Chloroprene rubber
		FKM	Fluoro rubber
		Si	Silicon rubber
15	<b>C type snap ring</b>	Carbon steel	Nickel plated
16	<b>Exhaust plug</b>	Brass	Electroless nickel plated
17	<b>Exhaust filter</b>	Polyvinyl formal	
18	<b>N.O. spring</b>	Stainless steel spring wire	
19	<b>N.C. spring</b>	Stainless steel spring wire	
20	<b>N.C. holder</b>	Brass	Electroless nickel plated
21	<b>N.C. spacer</b>	Stainless steel	
22	<b>Rod seal</b>	NBR	
23	<b>Piston seal</b>	NBR	
24	<b>Gasket</b>	NBR	
25	<b>Gasket</b>	NBR	

**Replacement parts: Dust covers**

Material	Part number
CR	MHZAJ2-J6
FKM	MHZAJ2-J6F
Si	MHZAJ2-J6S

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto Switch

# Series MHZA2-6/MHZAJ2-6


## Dimensions/Standard Type

MHZA2-6□


Double acting/Single acting

Basic Type

Scale: 100%

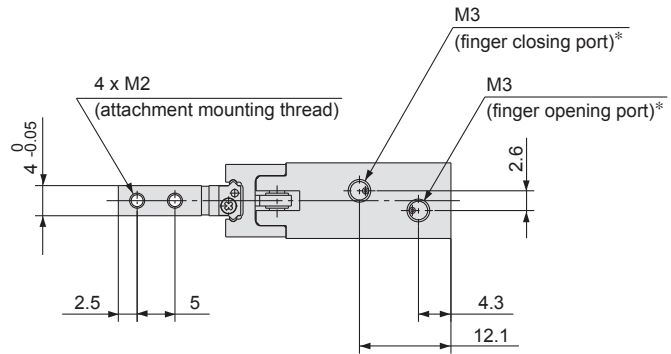

\* For single action, the port on one side is a breathing hole

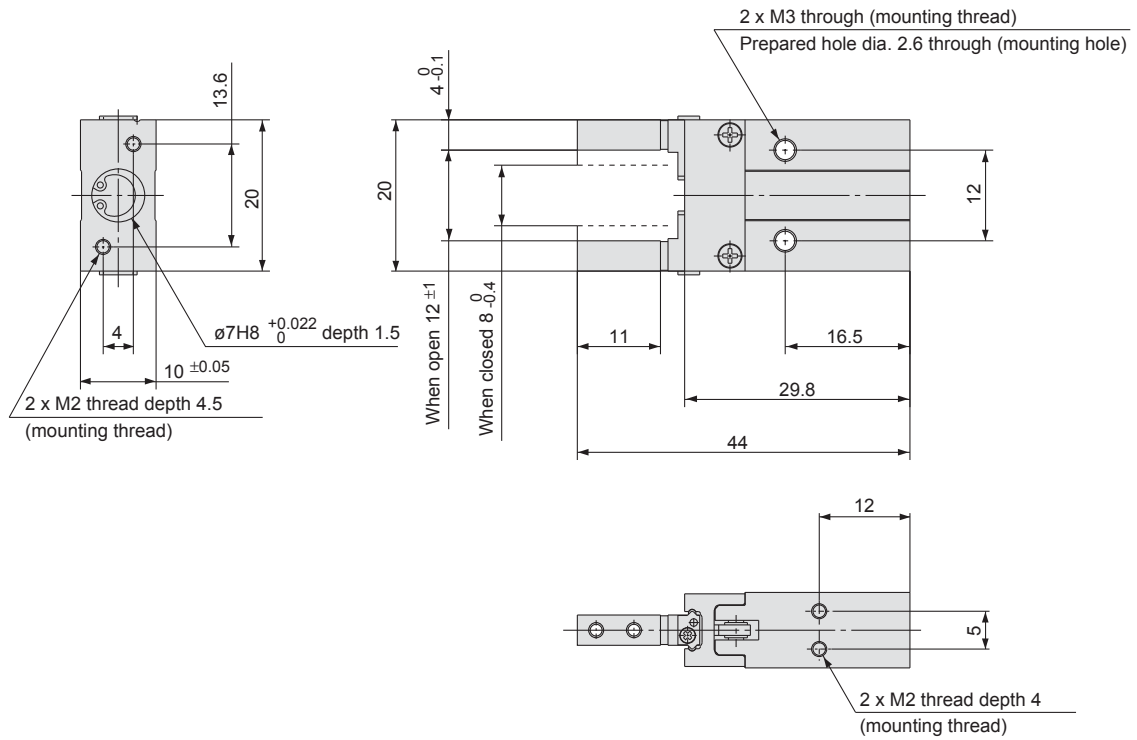






**Dimensions/With dust cover**

**MHZAJ2-6**  
 Double acting/Single acting  
 Basic Type

**Scale: 100%**

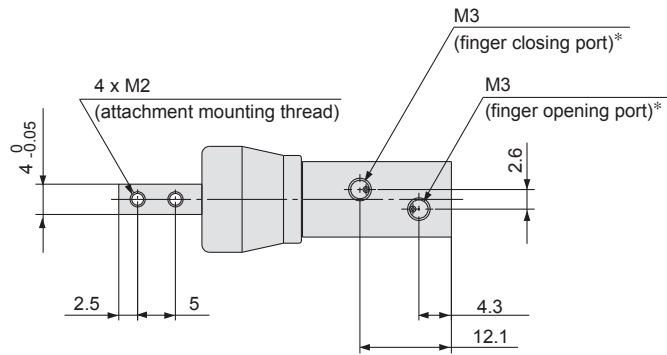

\* For single action, the port on one side is a breathing hole.

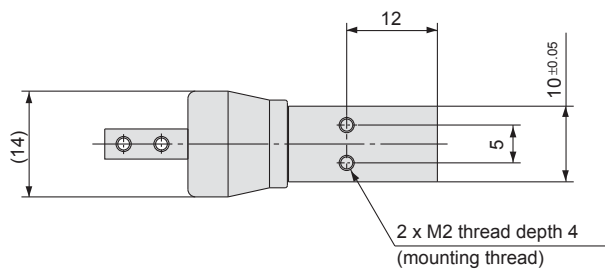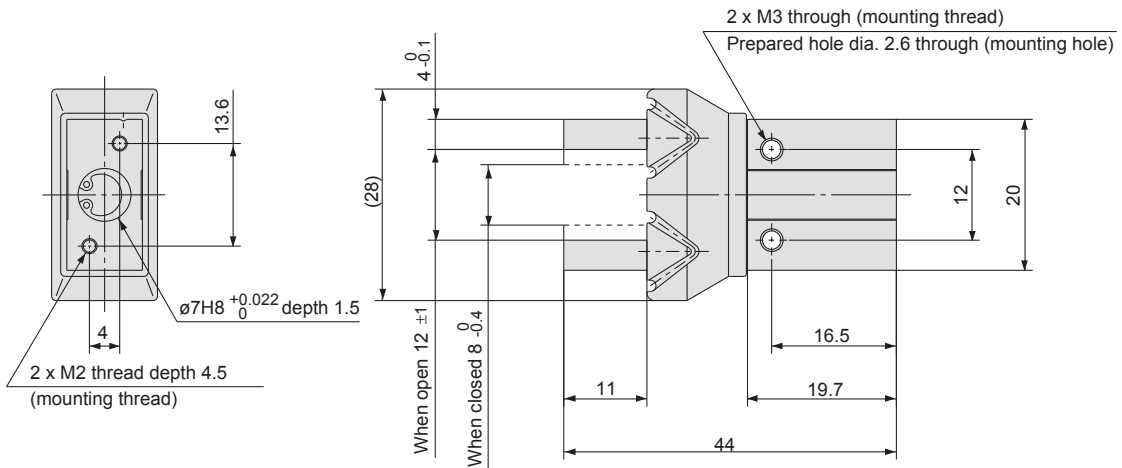


- MHZ
- MHQ
- MHL2
- MHR
- MHK
- MHS

- MHC2
- MHT2
- MHY2
- MHW2
- MRHQ
- Auto Switch

# Series MHZA2-6


## Finger Options

### Side Tapped Mounting [1]

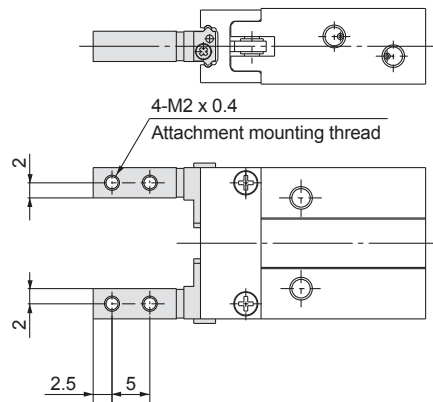


\* Specifications and dimensions other than the above are the same as the basic type.

### Through Holes in Opening/Closing Direction [2]

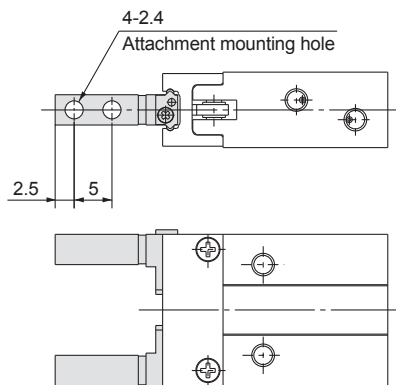

\* Specifications and dimensions other than the above are the same as the basic type.

### Flat Type Fingers [3]

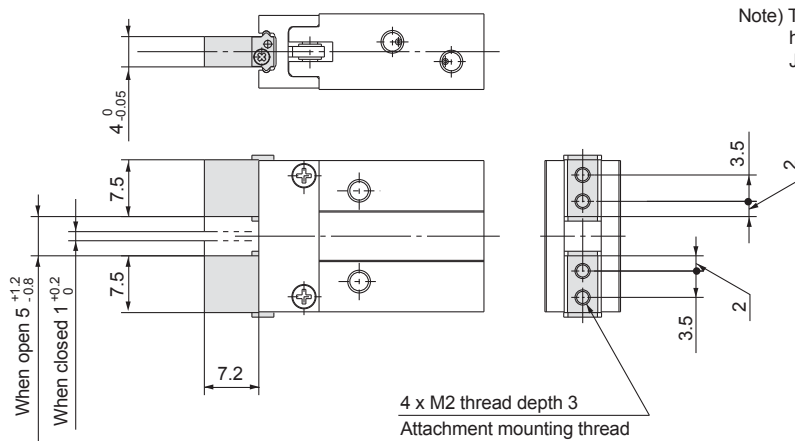

Note) To mount attachments, use M2 hexagon socket head cap screws with  $\phi 3.3$  top diameter, or JISB1101 type M2 round head screws.

Weight: 25g

\* Specifications and dimensions other than the above are the same as the basic type.

## Series MHZA2-6/MHZAJ2-6


# Body Options: End Boss Type

### Applicable Models

Symbol	Piping port position	Type of piping port		Applicable model	
		MHZA2	MHZAJ2	Double acting	Single acting
E	Side ported	M3		●	●
H	Axial port	With ø4 hose nipple		—	●
K		With ø4 One-touch fitting		—	●
M		M3		—	●


### Side Ported [E]

#### MHZA2-6□□E

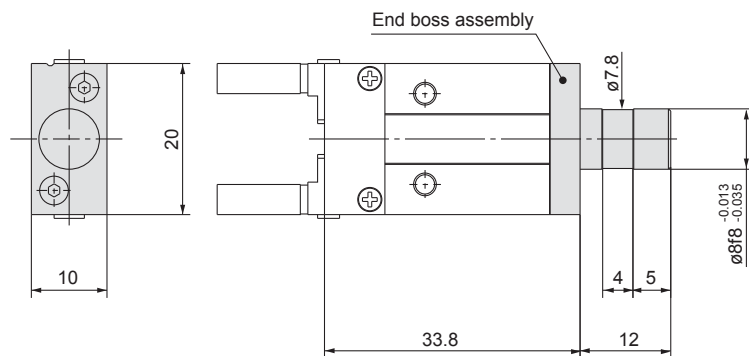

\* Specifications and dimensions other than the above are the same as the basic type.


#### MHZAJ2-6□□E

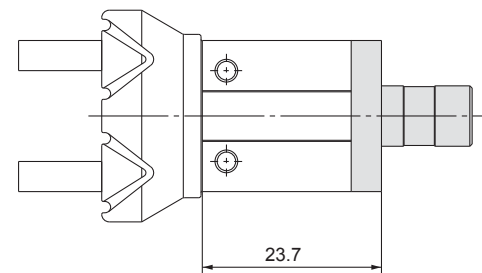

\* Specifications and dimensions other than the above are the same as the basic type or the end boss dimensions of the MHZA type.


### Axial Port (with Hose Nipple) [H]

#### MHZA2-6<sup>S</sup><sub>C</sub>□H

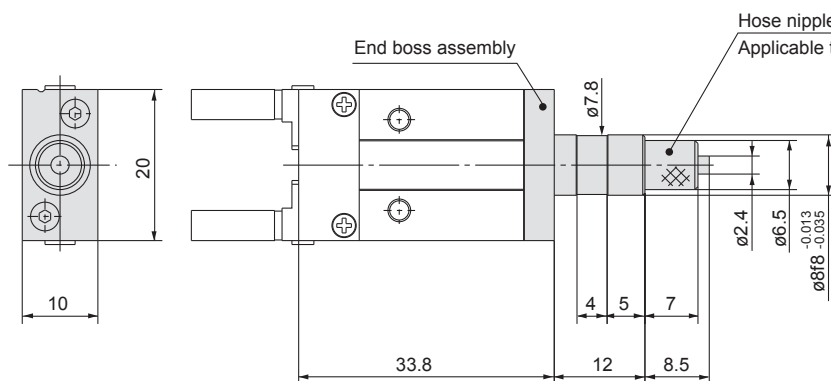

\* Specifications and dimensions other than the above are the same as the basic type.

#### MHZAJ2-6<sup>S</sup><sub>C</sub>□H

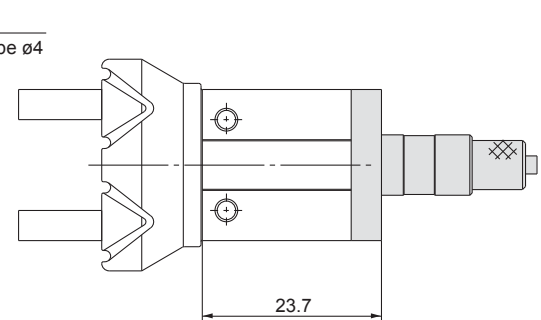

\* Specifications and dimensions other than the above are the same as the basic type or the end boss dimensions of the MHZA type.

### Applicable Tubing

Description/Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
Specification	T0425	TS0425	TU0425	TCU0425B-1
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Minimum bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane

Refer to catalogue CAT.501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ


Auto Switch

# Series MHZA2-6/MHZAJ2-6

## Axial Port (with One-touch Fitting) [K]

MHZA2-6  $\frac{S}{C}$ □K

MHZAJ2-6  $\frac{S}{C}$ □K

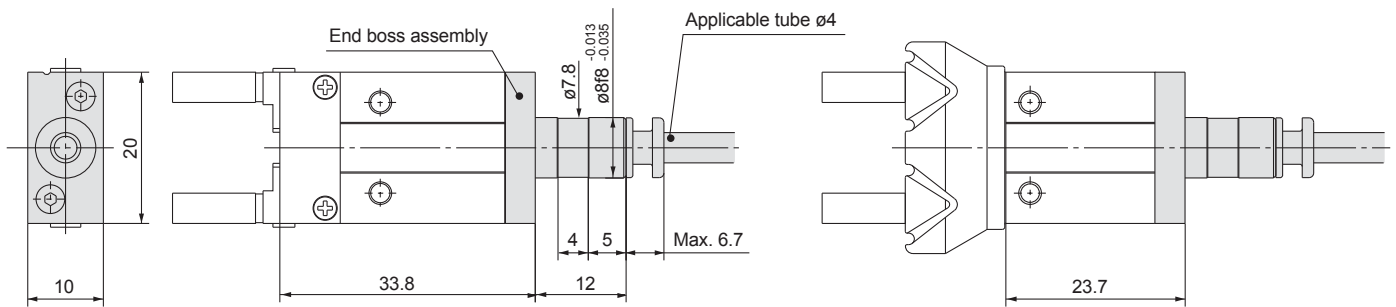

\* Specifications and dimensions other than the above are the same as the basic type.

\* Specifications and dimensions other than the above are the same as the basic type or the end boss dimensions of the MHZA type.

### Applicable tubing


Description/Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
Specification	T0425	TS0425	TU0425	TCU0425B-1
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Minimum bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane

Refer to catalogue CAT. 501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

## Axial Port (M3 Port) [M]

MHZA2-6  $\frac{S}{C}$ □M

MHZAJ2-6  $\frac{S}{C}$ □M

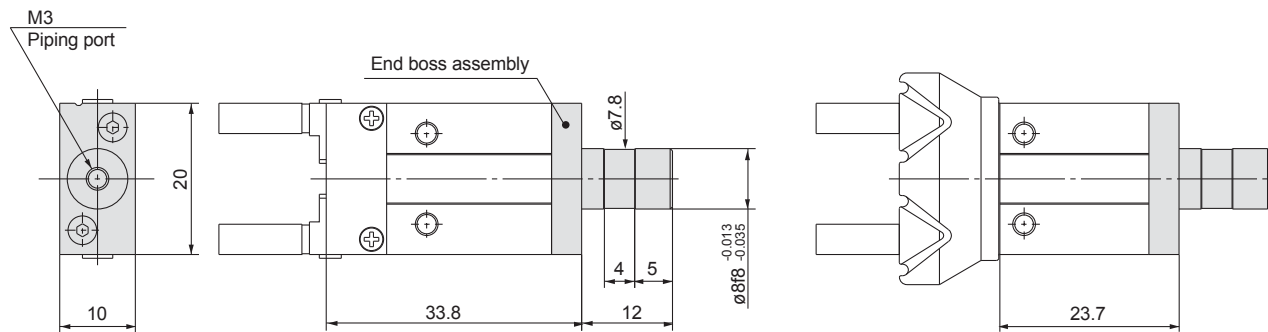

\* Specifications and dimensions other than the above are the same as the basic type.

\* Specifications and dimensions other than the above are the same as the basic type or the end boss dimensions of the MHZA type.



### Weights

Model	End boss type (symbol)			
	E	H	K	M
MHZA2-6□□	28	28	28	28
MHZAJ2-6□□	29	29	29	29

Unit: g

# Standard Type Series *MHZ2*

## How to Order

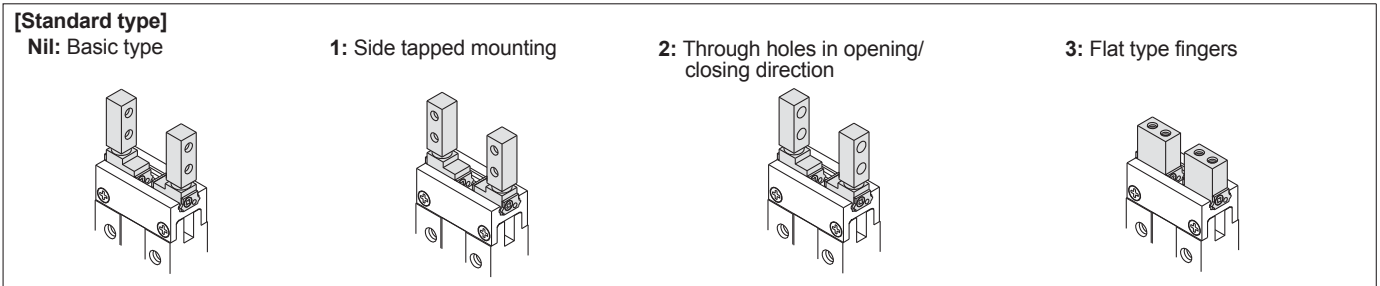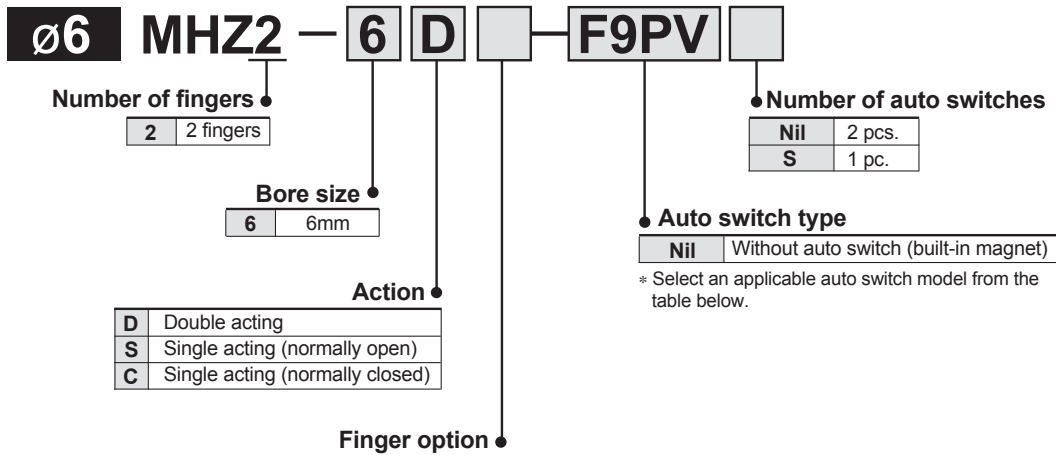

**Applicable auto switches**/\* Refer to pages 2.11-... for detailed auto switch specifications.

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*			Applicable load			
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)		Flexible lead wire (-61)		
							Perpendicular	In-line							
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	12V	—	F9NV	F9N	●	●	—	○	—	Relay, PLC
				3 wire (PNP)				F8N	—	●	●	○	○		
				2 wire				F9PV	F9P	●	●	—	○		
								F8P	—	●	●	○	○		
							F9BV	F9B	●	●	—	○			
								F8B	—	●	●	○	○		

\* Lead wire length symbols: 0.5m ..... Nil (Example) F9N  
3m ..... L (Example) F9NL  
5m ..... Z (Example) F9NZ

\* Auto switches marked with a "O" symbol are produced upon receipt of order.  
Note 1) When using a D-F8 switch, mount it at a distance of 10mm or more from magnetic substances such as iron, etc.

Note 2) Add "-61" at the end of the part number for the flexible lead wire.  
(Examples)

When ordering with an air gripper

MHZ    2-16D-F9NVS-61

● Flexible lead wire

When ordering auto switches only

D-F9PL-61

● Flexible lead wire

These auto switches have been changed.  
Contact SMC or view [www.smccworld.com](http://www.smccworld.com)

F9N → M9N	F9NV → M9NV
F9P → M9P	F9PV → M9PV
F9B → M9B	F9BV → M9BV

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto Switch

## How to Order

**ø10 to ø25 MHZ2 - 16 D - - - F9PV - -**

**Number of fingers**

2	2 fingers
---	-----------

**Bore size**

10	10mm
16	16mm
20	20mm
25	25mm

**Action**

D	Double acting
S	Single acting (normally open)
C	Single acting (normally closed)

**Number of auto switches**

Nil	2 pcs.
S	1 pc.

**Auto switch type**

Nil	Without auto switch (built-in magnet)
-----	---------------------------------------

\* Select an auto switch model from the table below.

**Body option**

**Nil:** Basic type

**E:** End boss type  
Side ported (double acting/single acting)

**W:** End boss type  
Axial port with ø4  
One-touch fitting for coaxial tubing (double acting)

**K:** End boss type  
Axial port with ø4  
One-touch fitting (single acting)

**M:** End boss type  
Axial M5 port (single acting)

These auto switches have been changed.  
Contact SMC or view [www.smworld.com](http://www.smworld.com)

F9N → M9N    F9NV → M9NV  
F9P → M9P    F9PV → M9PV  
F9B → M9B    F9BV → M9BV

**Finger position/Option**

**Standard type**  
[MHQ2 compatible type]  
Nil: Basic type

**1:** Side tapped mounting

**2:** Through holes in opening/closing direction

**3:** Flat type fingers

The flat type fingers do not have standard and narrow options. When MHQ2/MHQ2 compatible types are required, see the -X51 order made specifications on page 2.1-57.

**Narrow type**  
[MHQ2 compatible type]  
N: Basic type

**N1:** Side tapped mounting

**N2:** Through holes in opening/closing direction

**Applicable auto switches**/\* Refer to pages 2.11-1 for detailed auto switch specifications.

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*			Note 2) Flexible lead wire (-61)	Applicable load	Applicable model								
					DC	AC	Perpendicular	In-line	0.5 (Nil)	3 (L)	5 (Z)			ø10	ø16	ø20	ø25					
																		Y69A	Y59A			
Solid state auto switch	—	Grommet	Yes	3 wire (NPN)	5V, 12V	—	Y69A	Y59A	●	●	○	Standard	IC circuit	●	●	●	●					
							F9NV	F9N	●	●	—			○	●	●	●	●				
							F8N	—	●	●	○			○	—	—	—	—				
					12V		Y7PV	Y7P	●	●	○			Standard	IC circuit	●	●	●	●			
							F9PV	F9P	●	●	—					○	●	●	●	●		
							F8P	—	●	●	○					○	—	—	—	—		
				24V	—	—	2 wire	12V	Y69B	Y59B	●	●	○	○	—	Relay, PLC	●	●	●	●		
									F9BV	F9B	●	●	—	○			●	●	●	●		
									F8B	—	●	●	○	○			—	—	—	—		
								5V, 12V	Y7NWV	Y7NW	●	●	○	Standard			IC circuit	—	—	●	●	
									F9NWV	F9NW	●	●	○					○	—	—	—	—
									Y7PWV	Y7PW	●	●	○					○	Standard	IC circuit	—	—
	5V, 12V	F9PWV	F9PW	●	●	○	○	—	—	—	—											
		Y7BWV	Y7BW	●	●	○	○	Standard	—	—	—	●	●									
12V		F9BWV	F9BW	●	●	○	○			—	—	—	—									

\* Lead wire length symbols: 0.5m ..... Nil (Example) F9N  
3m ..... L (Example) F9NL  
5m ..... Z (Example) Y59AZ

Note 2) Add "-61" at the end of the part number for the flexible lead wire.

(Examples)

When ordering with an air gripper

MHZ □2-16D-F9NVS-□61

Flexible lead wire ●


When ordering auto switches only

D-F9PL-□61

Flexible lead wire ●





## Конструкция со встроенной направляющей: серия MHZ2

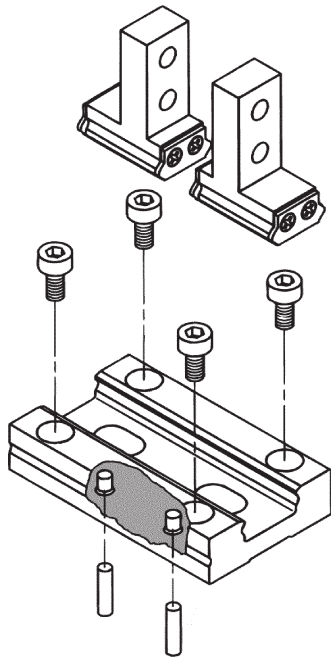

Встроенная продольная направляющая обеспечивает высокую надежность и точность позиционирования


### Обычная конструкция

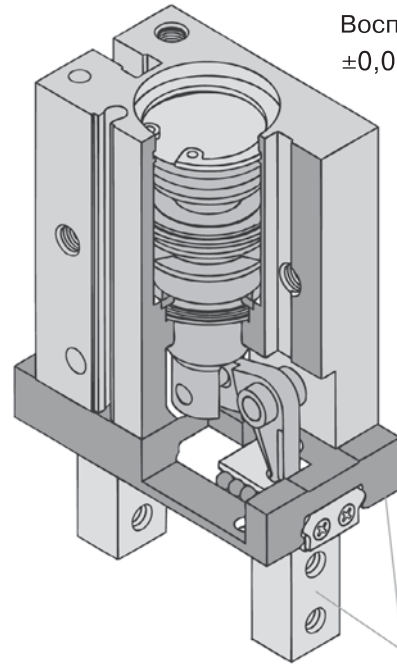

Воспроизводимость  $\pm 0,01\text{мм}$

Нержавеющая сталь


### Крепление датчиков положения

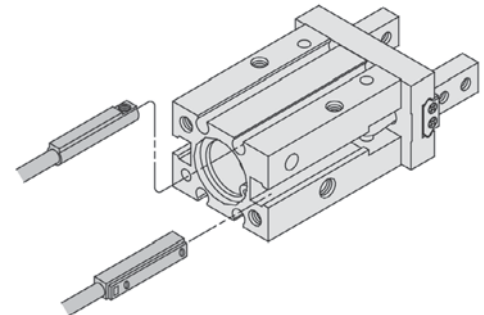


Возможность крепления датчиков вдоль любой плоскости

### Возможность монтажа в разных положениях


Крепление по торцу



Крепление по широкой стороне



Крепление по боковой стороне




# Параллельный захват

## MHZ2

Ø10~25

### Технические характеристики

Среда	Очищенный сжатый воздух с содержанием масла или без него	
Рабочий диапазон (МПа)	Двустороннего действия	0.2 ~ 0.7
	Одностороннего действия	0.35 ~ 0.7
Диапазон рабочих температур (°C)	-10 ~ 60	
Воспроизводимость (мм)	±0.01	
Макс. частота срабатывания (мин <sup>-1</sup> )	180	
Тип	Одностороннего, двустороннего действия	

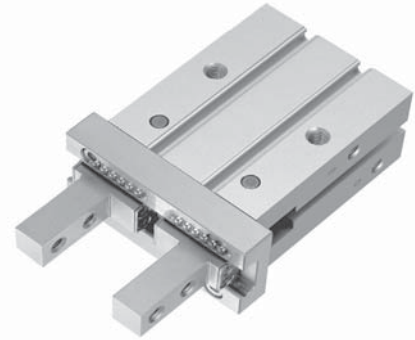


### Номер для заказа


Диам. поршня, мм	Двустороннего действия	Одностороннего действия	
		Раскрыт без подачи давления	Закрыт без подачи давления
10	MHZ2-10DN	MHZ2-10SN	MHZ2-10CN
16	MHZ2-16DN	MHZ2-16SN	MHZ2-16CN
20	MHZ2-20DN	MHZ2-20SN	MHZ2-20CN
25	MHZ2-25DN	MHZ2-25SN	MHZ2-25CN

### Условное обозначение


Двустороннего действия



Одностороннего действия, раскрыт без подачи давления



Одностороннего действия, закрыт без подачи давления



### Исполнение

Тип	Модель	Диам. поршня (мм)	Удерживающее усилие при 0.5 МПа (Н)		Длина хода на раскрытие (мм)	Вес (г)	
			наруж. захват	внутр. захват			
Двустороннего действия	MHZ2-10DN	10	9.8	17	4	55	
	MHZ2-16DN	16	30	40	6	115	
	MHZ2-20DN	20	42	66	10	235	
	MHZ2-25DN	25	65	104	14	430	
Одностороннего действия	Раскрыт без подачи давления	MHZ2-10SN	10	6.3		4	55
		MHZ2-16SN	16	24		6	115
		MHZ2-20SN	20	28		10	240
		MHZ2-25SN	25	45		14	435
	Закрыт без подачи давления	MHZ2-10CN	10		12	4	55
		MHZ2-16CN	16		31	6	115
		MHZ2-20CN	20		56	10	240
		MHZ2-25CN	25		83	14	430

\* Усилие приводится для средней точки на одном пальце.


Более точные значения см. на диаграммах

\*\* Вес указан без датчиков положения


Информация о датчиках положения – см. стр. 2-32

## Конструкция


### Двустороннего действия/пальцы в открытом положении

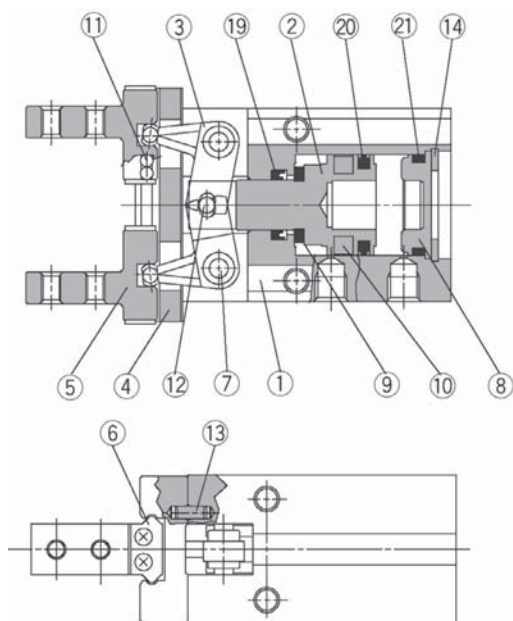


### Одностороннего действия/без давления открыт

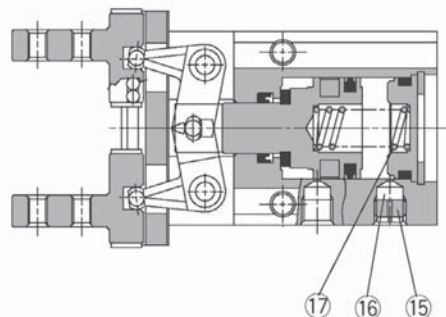

### Одностороннего действия/без давления закрыт

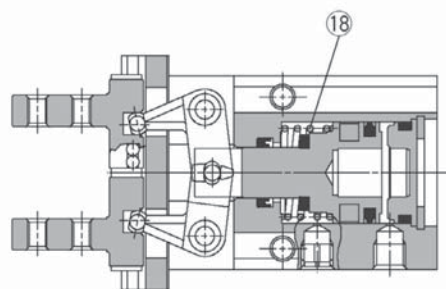

### Двустороннего действия/пальцы в закрытом положении

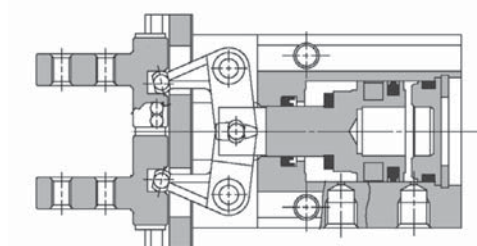

## Спецификация

Поз.	Описание	материал	примечание
1	Корпус	Алюм. сплав	
2	Поршень	∅10, ∅16: нерж. сталь ∅20, ∅25: алюм. сплав	
3	Рычаг	нерж. сталь	Закаленная
4	Направляющая	нерж. сталь	Закаленная
5	Палец	нерж. сталь	Закаленная
6	Упор	нерж. сталь	Закаленная
7	Ось рычага	нерж. сталь	азотированная
8	Крышка	Синтетич. резина	
9	Демпфер	Полиуретан	
10	Магнит. кольцо	Синтетич. резина	

Поз.	Описание	материал	примечание
11	Шарики	высокоуглер. подшип. сталь	
12	Ось	высокоуглер. подшип. сталь	
13	Штифт	Нерж. сталь	
14	Стопорное кольцо	Сталь	Никелированная
15	Деаэрационная пробка	Латунь	Никелированная
16	Фильтр выхлопа	Полимер	
17	Пружина	Пружинная сталь	
18	Пружина	Пружинная сталь	
19	Уплотнение штока	Резина	
20	Уплотнение поршня	Резина	
21	Уплотнение крышки	Резина	

## Принадлежности

### Ремкомплект

Номер для заказа				Описание
MHZ2-10D	MHZ2-16D	MHZ2-20D	MHZ2-25D	Комплект включает поз. 19, 20, 21
MHZ10-PS	MHZ16-PS	MHZ20-PS	MHZ25-PS	


# Параллельный захват MHZ2

## Эффективное удерживающее усилие: захват двустороннего действия


### Критерии выбора захвата:

- вес детали
- коэфф. трения между захватом и деталью
- форма детали


Рекомендуется выбирать захват так, чтобы удерживающее усилие было в 10-20 раз больше веса детали



### Захват снаружи




### Захват изнутри




### Удерживающее усилие при захвате снаружи


#### MHZ2-10D

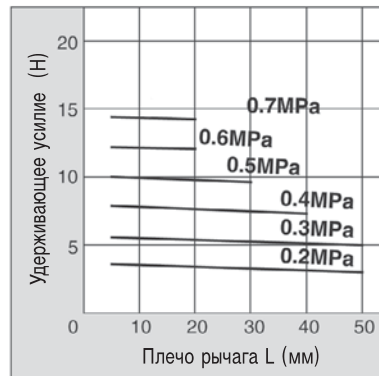


#### MHZ2-16D

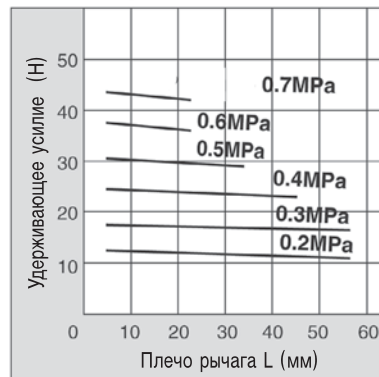

#### MHZ2-20D

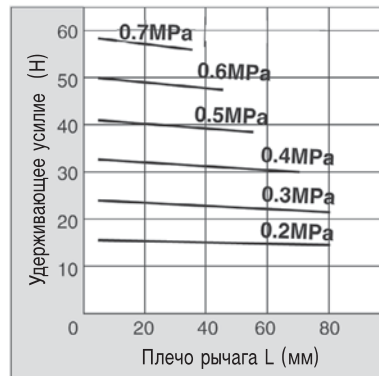


#### MHZ2-25D

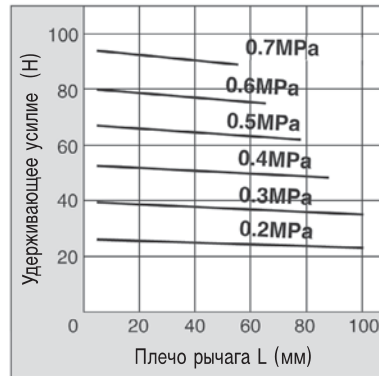


### Удерживающее усилие при захвате изнутри


#### MHZ2-10D

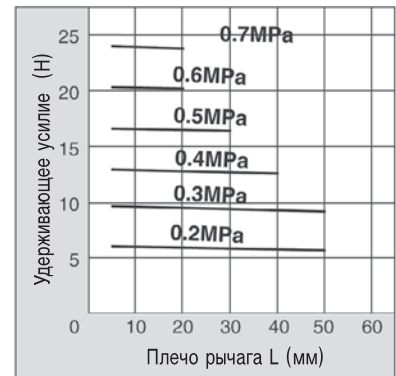


#### MHZ2-16D

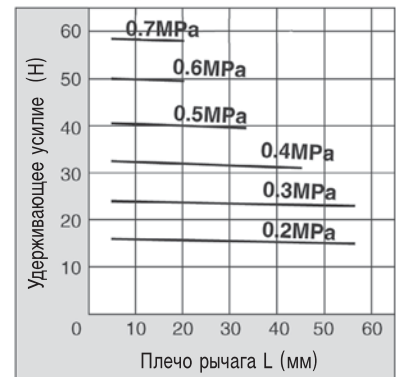

#### MHZ2-20D

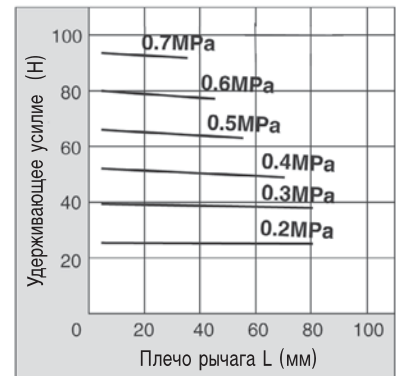

#### MHZ2-25D

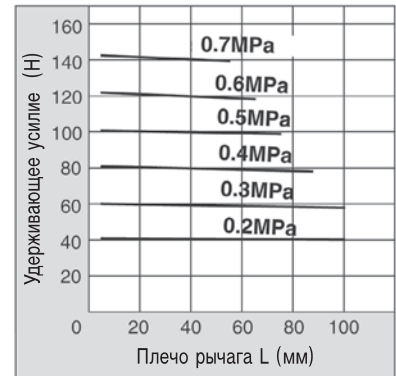


## Эффективное удерживающее усилие: захват одностороннего действия


### Критерии выбора захвата:

- вес детали
- коэфф. трения между захватом и деталью
- форма детали


Рекомендуется выбрать захват так, чтобы удерживающее усилие было в 10-20 раз больше веса детали




### Захват снаружи




### Захват изнутри



### Удерживающее усилие при захвате снаружи

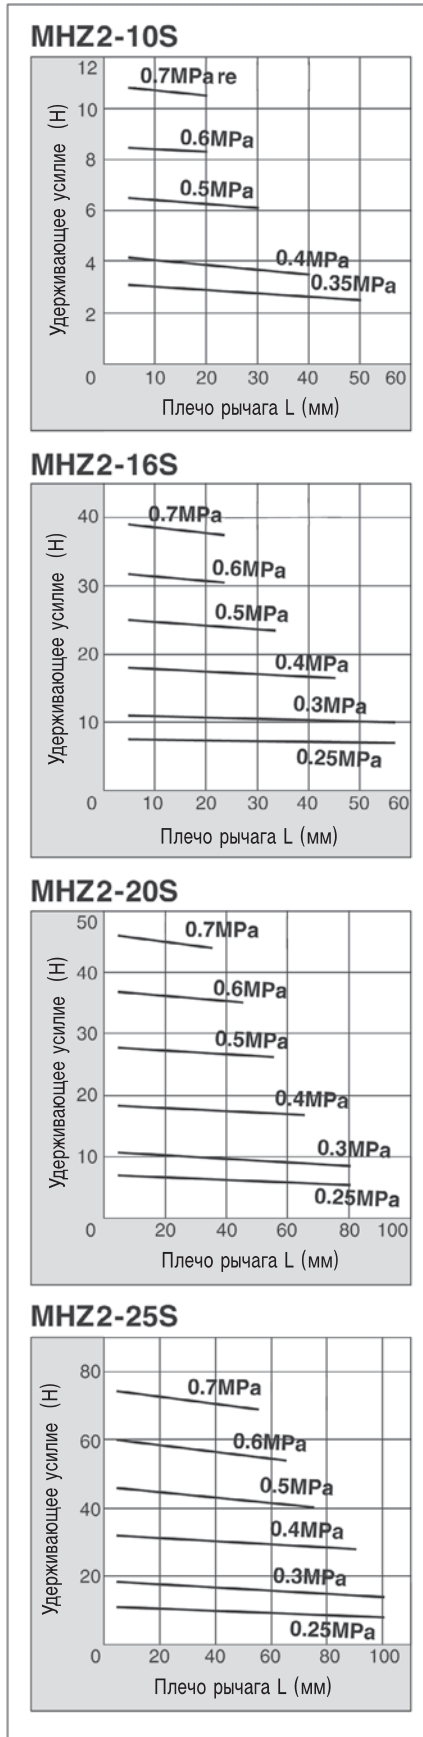

### Удерживающее усилие при захвате изнутри

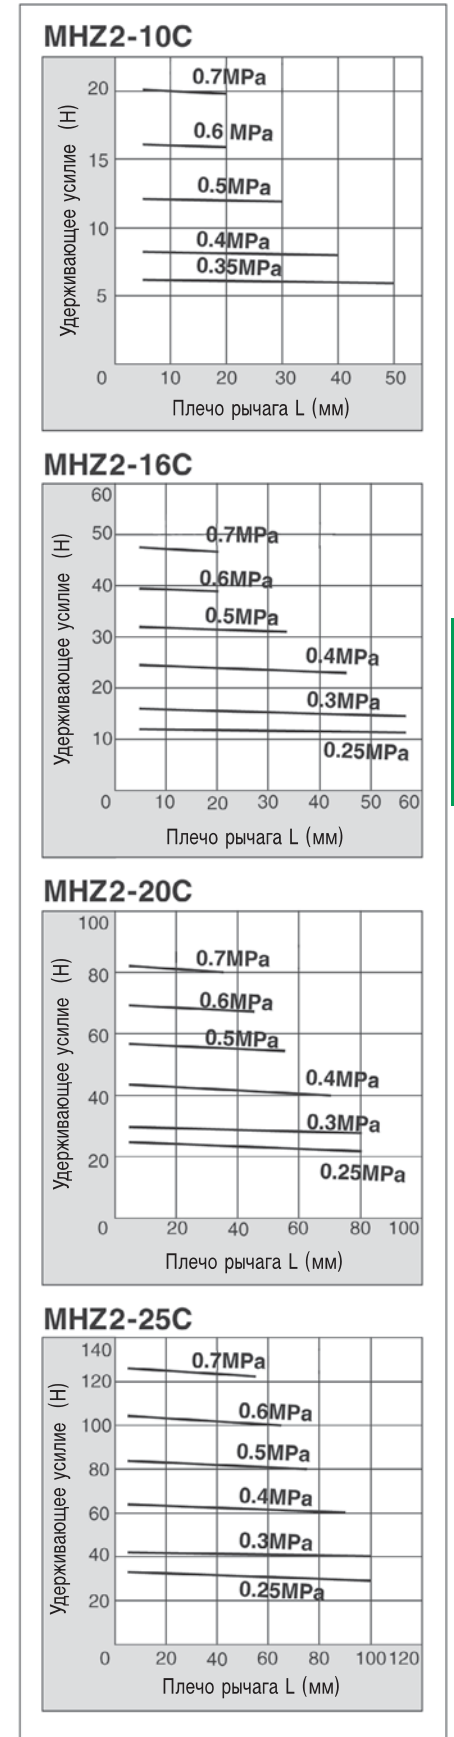


# Параллельный захват MHZ2

## Приложение усилия не по центру


### При захвате снаружи

### При захвате изнутри


Захват снаружи

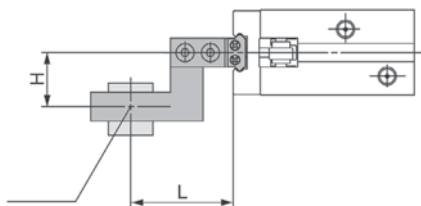


Захват изнутри

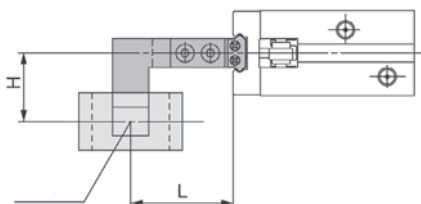


MHZ2-10□

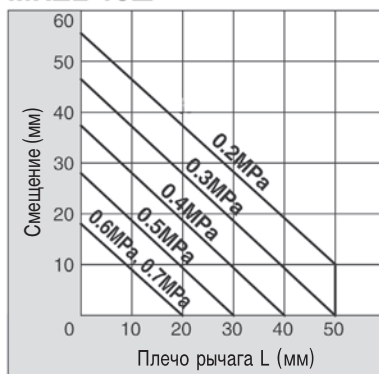


MHZ2-10□

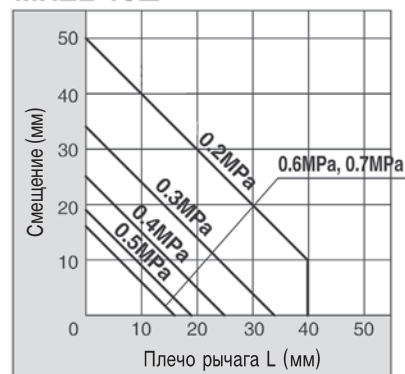


MHZ2-16□

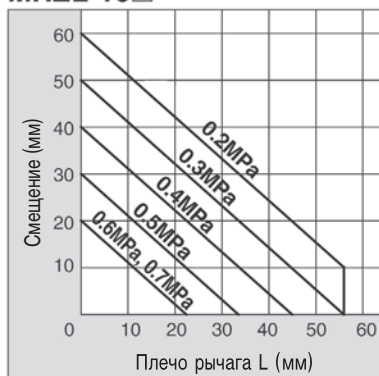


MHZ2-16□

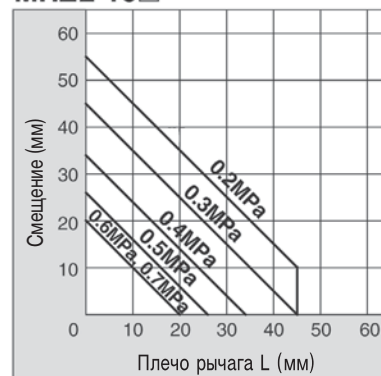


MHZ2-20□

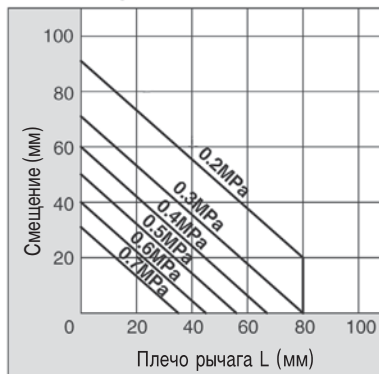


MHZ2-20□

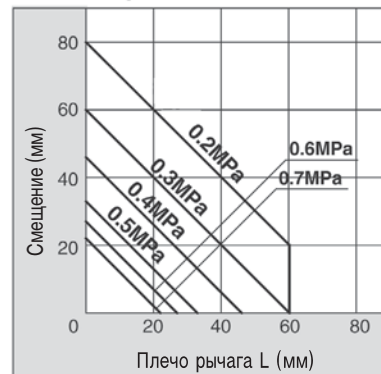

MHZ2-25□

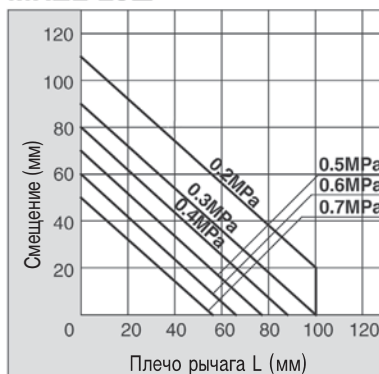

MHZ2-25□

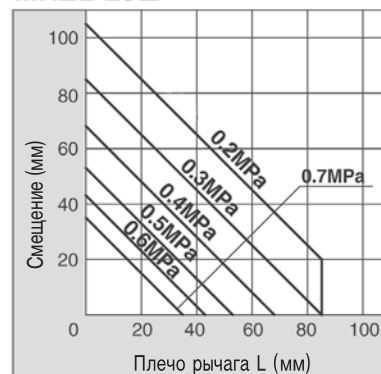


На этих диаграммах  
искомое значение плеча L  
зависит от величины эксцентриситета H  
и рабочего давления в сети



## Размеры

### MHZ2-10□

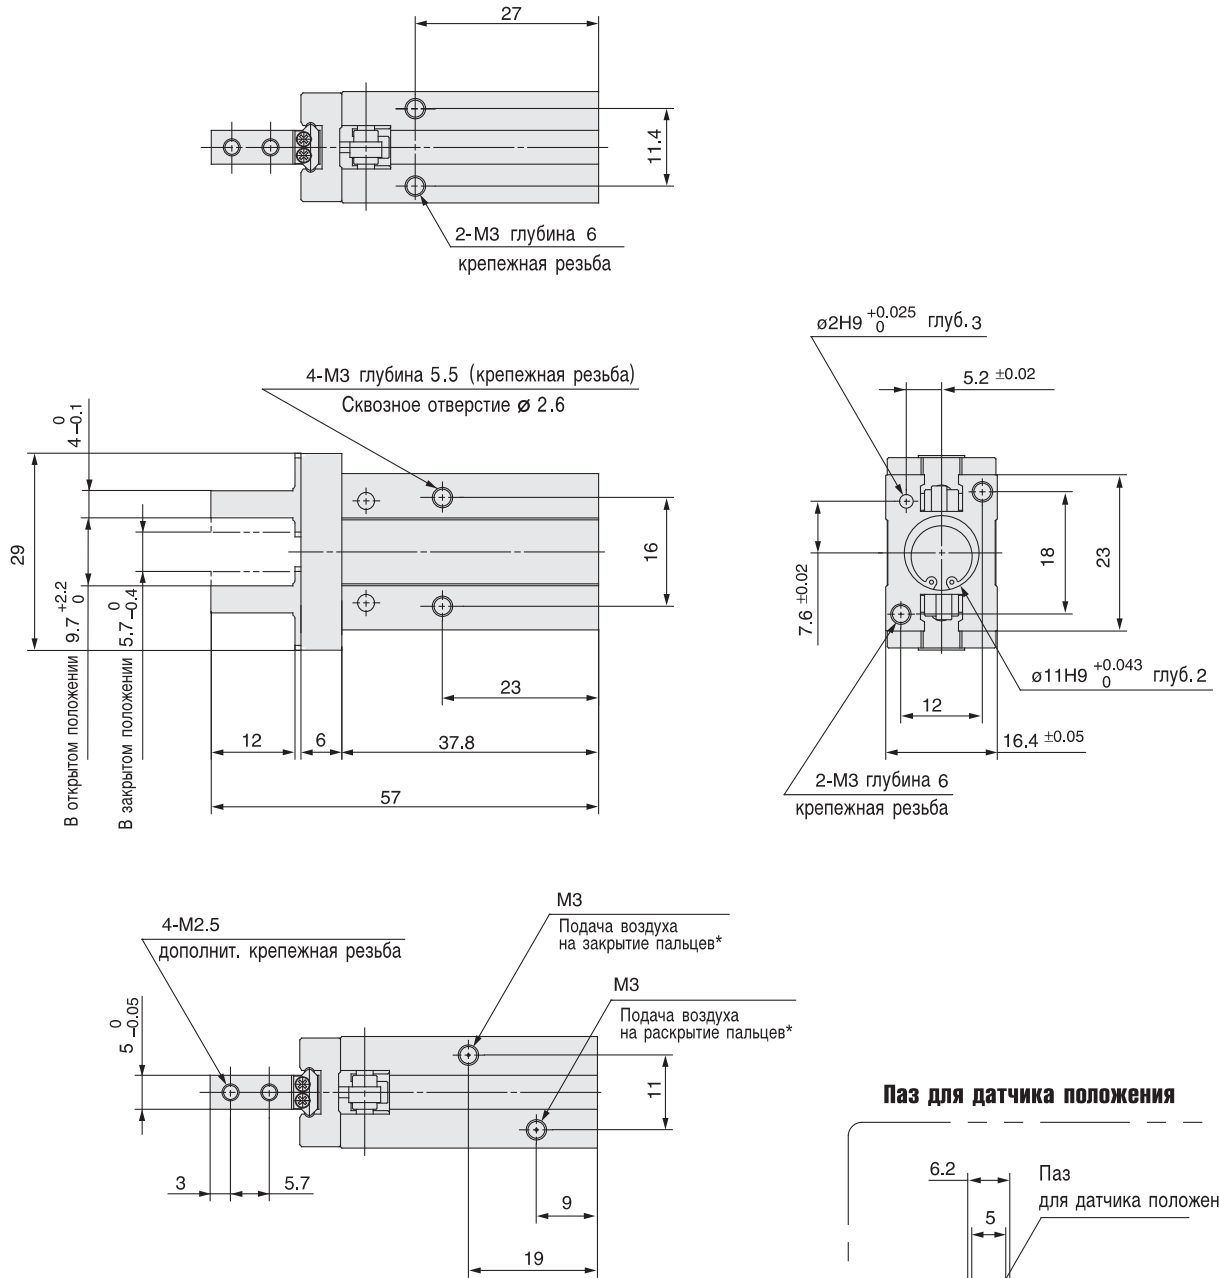


\* В случае одностороннего действия один из портов служит для выпуска воздуха

# Параллельный захват МН2





## Размеры

### МН2-16□

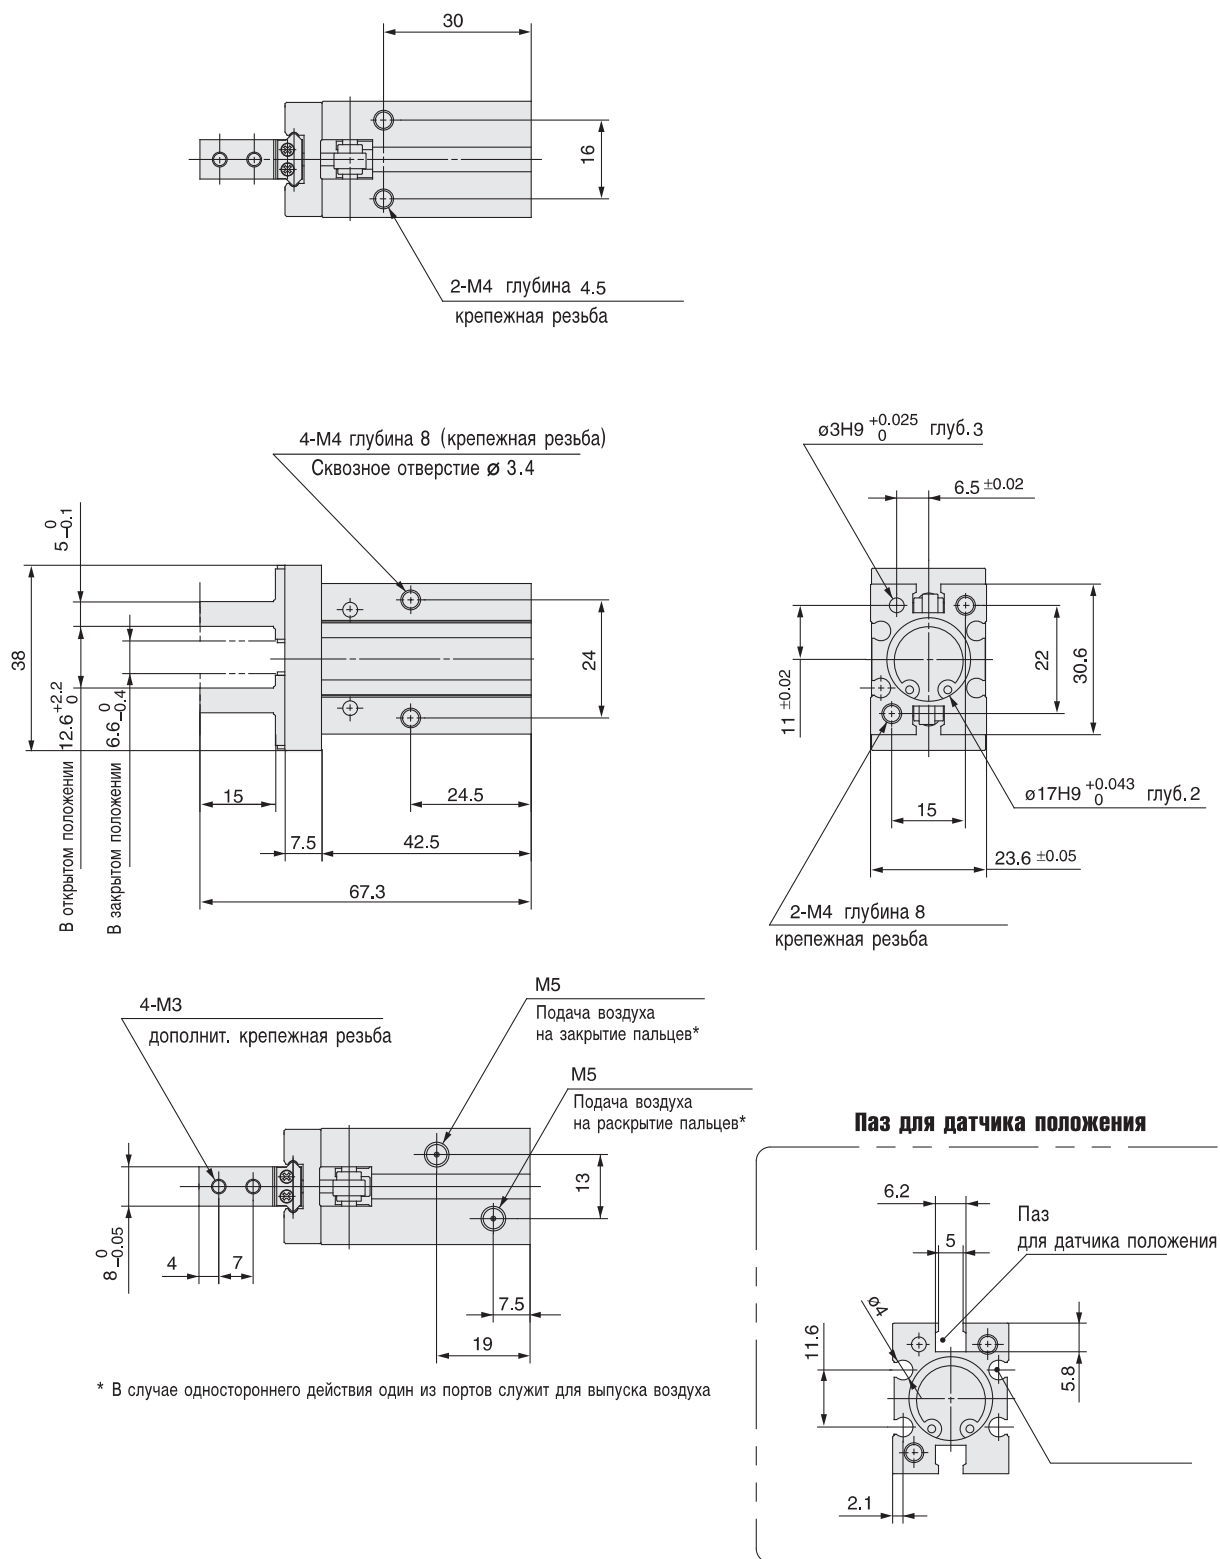


## Размеры

### MH22-20□

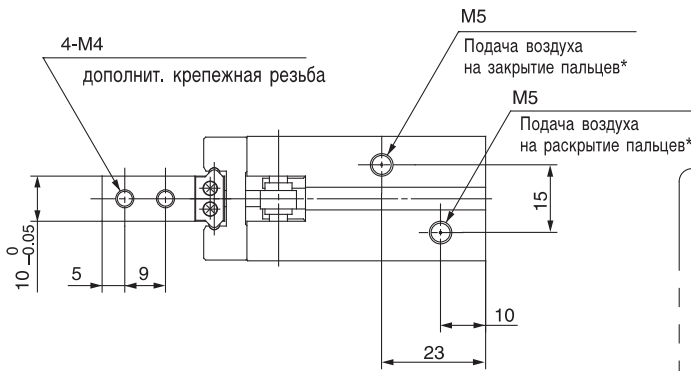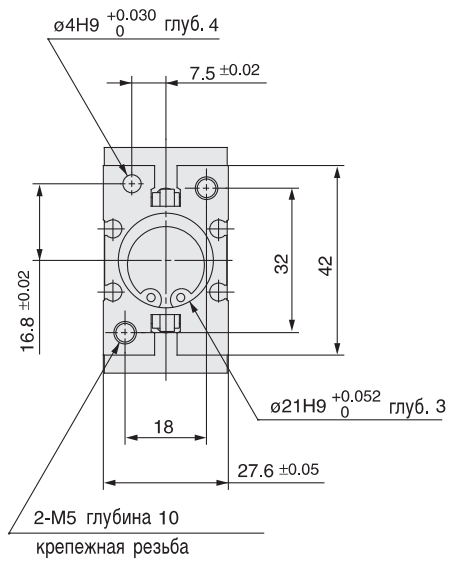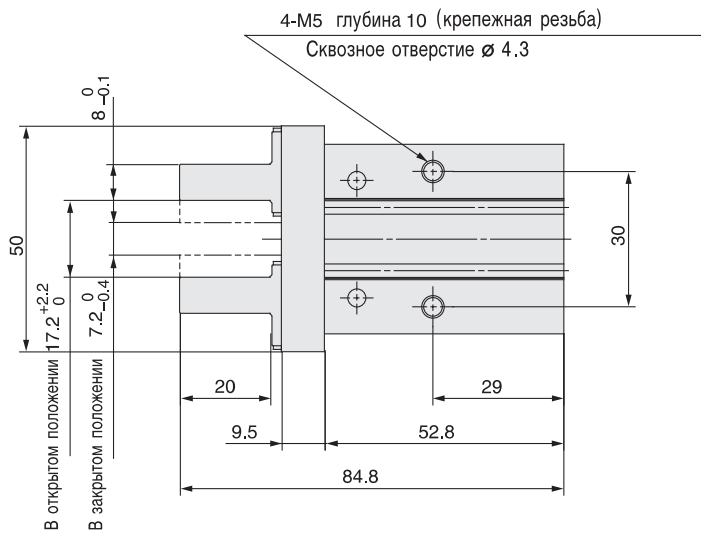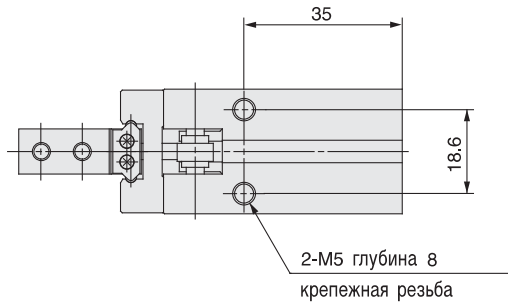


\* В случае одностороннего действия один из портов служит для выпуска воздуха

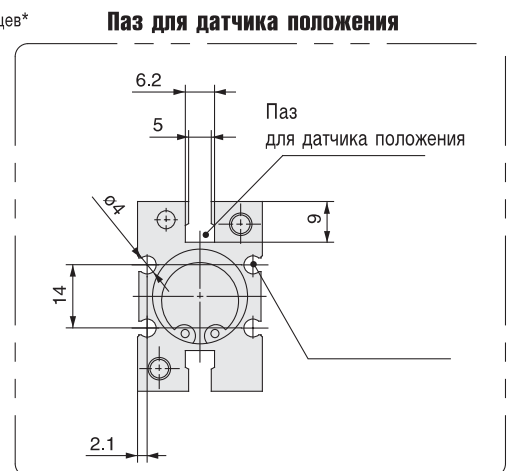



# Параллельный захват МНЗ2

## Размеры

### МНЗ2-25□

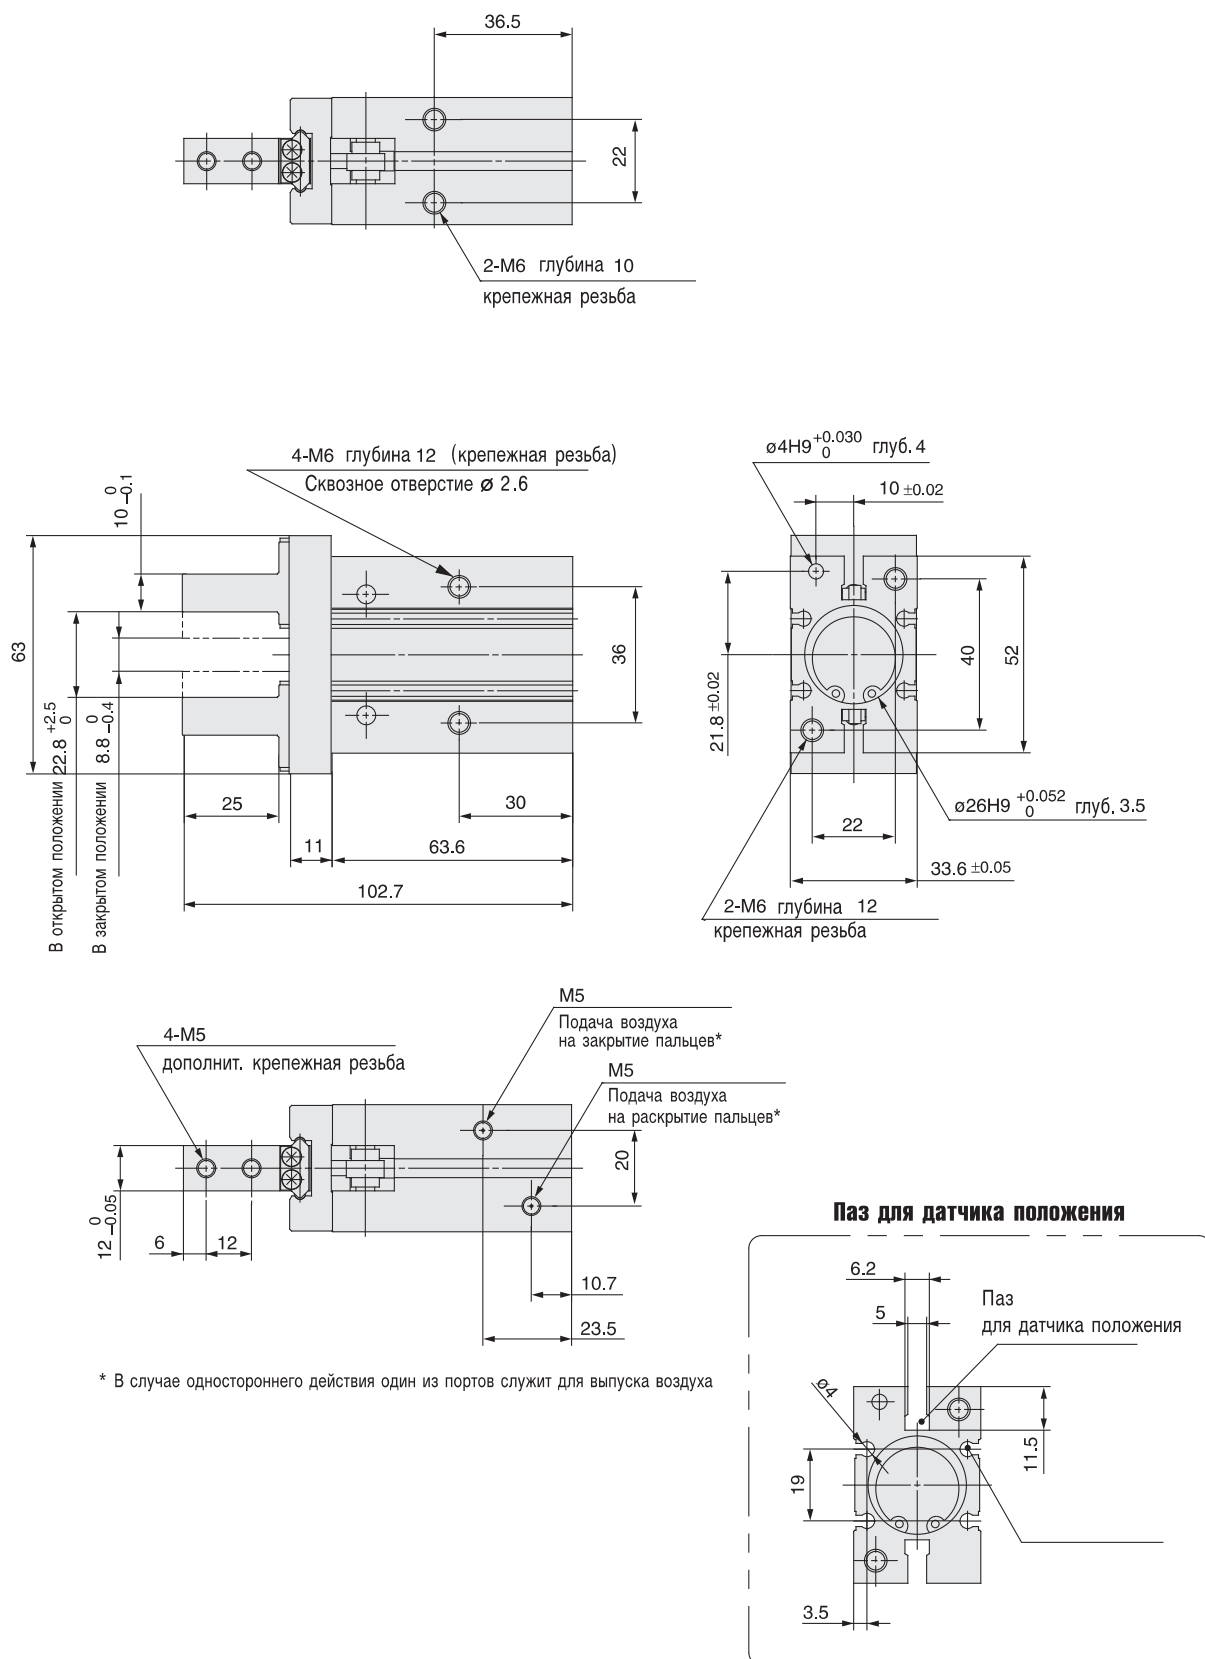

### How to Order

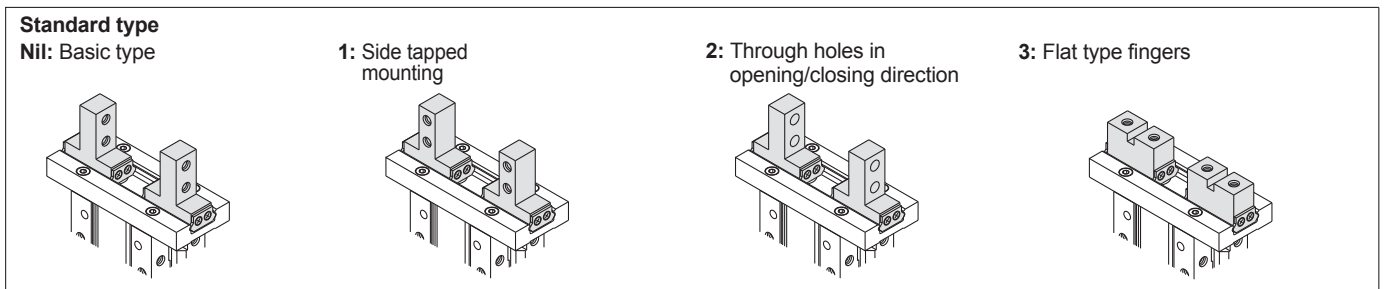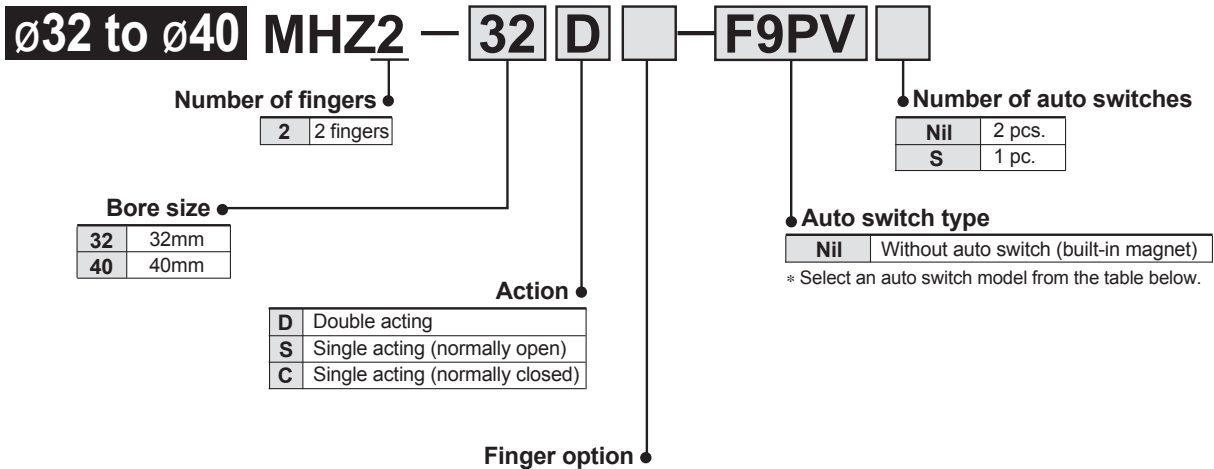

**Applicable auto switches**/\* Refer to pages 2.11-1 for detailed auto switch specifications.

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*			Note 2) Flexible lead wire (-61)	Applicable load	Applicable model							
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)			ø32	ø40						
							Perpendicular	In-line													
Solid state auto switch	—	Grommet	Yes	3 wire (NPN)	5V, 12V	—	<b>Y69A</b>	<b>Y59A</b>	●	●	○	Standard	IC circuit	●	●						
					12V		<b>F9NV</b>	<b>F9N</b>	●	●	—	○		—	●	●					
				3 wire (PNP)	5V, 12V		<b>F8N</b>	—	●	●	○	○		—	●	●					
					12V		<b>Y7PV</b>	<b>Y7P</b>	●	●	○	Standard		IC circuit	●	●					
				2 wire	24V		<b>F9PV</b>	<b>F9P</b>	●	●	—	○		—	●	●					
							<b>F8P</b>	—	●	●	○	○		—	●	●					
				Diagnostic indication (2 colour indicator)	—		—	—	3 wire (NPN)	5V, 12V	<b>Y69B</b>	<b>Y59B</b>		●	●	○	○	—	Relay, PLC	●	●
										12V	<b>F9BV</b>	<b>F9B</b>		●	●	—	○	—	●	●	
									3 wire (PNP)	5V, 12V	<b>F8B</b>	—		●	●	○	○	—	●	●	
										12V	<b>Y7NWV</b>	<b>Y7NW</b>		●	●	○	Standard	IC circuit	●	●	
	2 wire	12V	<b>F9NWV</b>	<b>F9NW</b>	●	●	○	○	—	●	●										
			<b>Y7PWV</b>	<b>Y7PW</b>	●	●	○	Standard	IC circuit	●	●										
							<b>F9PWV</b>	<b>F9PW</b>	●	●	○	○	—	●	●						
							<b>Y7BWV</b>	<b>Y7BW</b>	●	●	○	Standard	—	●	●						
						<b>F9BWV</b>	<b>F9BW</b>	●	●	○	○	—	●	●							

\* Lead wire length symbols: 0.5m ..... Nil (Example) F9N  
 3m ..... L (Example) F9NL  
 5m ..... Z (Example) Y59AZ

\* Auto switches marked with a "○" symbol are produced upon receipt of order.

Note 1) Use caution regarding hysteresis in the 2 color indicator types. When using this type, refer to "Auto Switch Hysteresis" on page 2.1-52.

Note 2) Add "-61" at the end of the part number for the flexible lead wire.

(Examples)

When ordering with an air gripper

MHZ    2-16D-F9NVS- 61

● Flexible lead wire

When ordering auto switches only

D-F9PL- 61

● Flexible lead wire

These auto switches have been changed  
 Contact SMC or view [www.smcworld.com](http://www.smcworld.com)

F9N → M9N    F9NV → M9NV  
 F9P → M9P    F9PV → M9PV  
 F9B → M9B    F9BV → M9BV

Note 3) Through hole mounting is not available when using auto switch types D-Y59, D-Y69, or D-Y7.

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ


Auto Switch

# Series MHZ2


ø6



ø10 to ø25

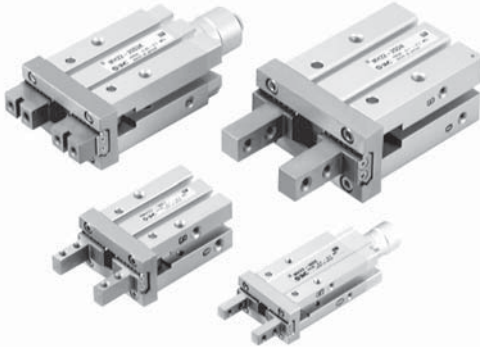


ø32, ø40

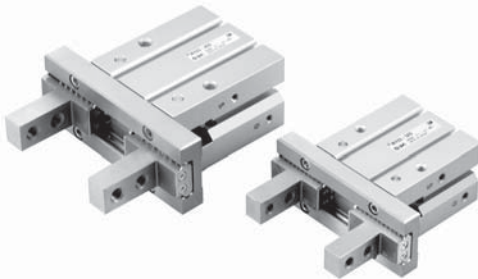


## Symbols:


### Double acting type



### Single acting type, normally open



### Single acting type, normally closed



## Specifications

<b>Fluid</b>		Air	
<b>Operating pressure</b>	<b>Double acting</b>		ø6: 0.15 to 0.7MPa ø10: 0.2 to 0.7MPa ø16 to ø40: 0.1 to 0.7MPa
	<b>Single acting</b>	<b>Normally open</b>	ø6: 0.3 to 0.7MPa ø10: 0.35 to 0.7MPa ø16 to ø40: 0.25 to 0.7MPa
		<b>Normally closed</b>	ø6: 0.3 to 0.7MPa ø10: 0.35 to 0.7MPa ø16 to ø40: 0.25 to 0.7MPa
<b>Ambient and fluid temperature</b>		-10 to 60°C	
<b>Repeatability</b>		ø6 to ø25: ±0.01mm ø32, ø40: ±0.02mm	
<b>Maximum operating frequency</b>		ø6 to ø25: 180c.p.m. ø32, ø40: 60c.p.m.	
<b>Lubrication</b>		Non-lube	
<b>Action</b>		Double acting, Single acting	
<b>Auto switch (option) <sup>Note)</sup></b>		Solid state switch (3 wire, 2 wire)	

Note) Refer to pages 2.11-1 for details regarding auto switch specifications.

## Models

Action	Model	Bore size (mm)	Gripping force <sup>Note 1)</sup>		Opening/Closing stroke (both sides) mm	Weight <sup>Note 2)</sup> g	
			Gripping force per finger Effective value N				
			External gripping force	Internal gripping force			
Double acting	MHZ2-6D	6	3.3	6.1	4	27	
	MHZ2-10D(N)	10	11	17	4	55	
	MHZ2-16D(N)	16	34	45	6	115	
	MHZ2-20D(N)	20	42	66	10	235	
	MHZ2-25D(N)	25	65	104	14	430	
	MHZ2-32D	32	158	193	22	715	
	MHZ2-40D	40	254	318	30	1275	
Single acting	Normally open	MHZ2-6S	6	1.9	—	4	27
		MHZ2-10S(N)	10	7.1		4	55
		MHZ2-16S(N)	16	27		6	115
		MHZ2-20S(N)	20	33		10	240
		MHZ2-25D(N)	25	45		14	435
		MHZ2-32S	32	131		22	760
		MHZ2-40S	40	217		30	1370
	Normally closed	MHZ2-6C	6	—	3.7	4	27
		MHZ2-10C(N)	10		13	4	55
		MHZ2-16C(N)	16		38	6	115
		MHZ2-20C(N)	20		57	10	240
		MHZ2-25C(N)	25		83	14	430
		MHZ2-32C	32		161	22	760
MHZ2-40C	40	267	30	1370			

Note 1) Values based on pressure of 0.5MPa, gripping point L = 20mm, at center of stroke.

Note 2) Values excluding weight of auto switch.

## Options


### • Body options/End boss type

Symbol	Piping port position	Type of piping port							Applicable model	
		MHZ2-6	MHZ2-10	MHZ2-16	MHZ2-20	MHZ2-25	MHZ2-32	MHZ2-40	Double acting	Single acting
Nil	Basic type	M3			M5				●	●
E	Side ported	—	M3	M5			—	—	●	●
W	Axial port	—	With ø4 One-touch fitting for coaxial tube				—	—	●	—
K	Axial port	—	With ø4 One-touch fitting				—	—	—	●
M	Axial port	—	M5				—	—	—	●

\* For detailed body option specifications, refer to option specifications on page 2.1-29.



**Clean Room Series: Air Gripper**

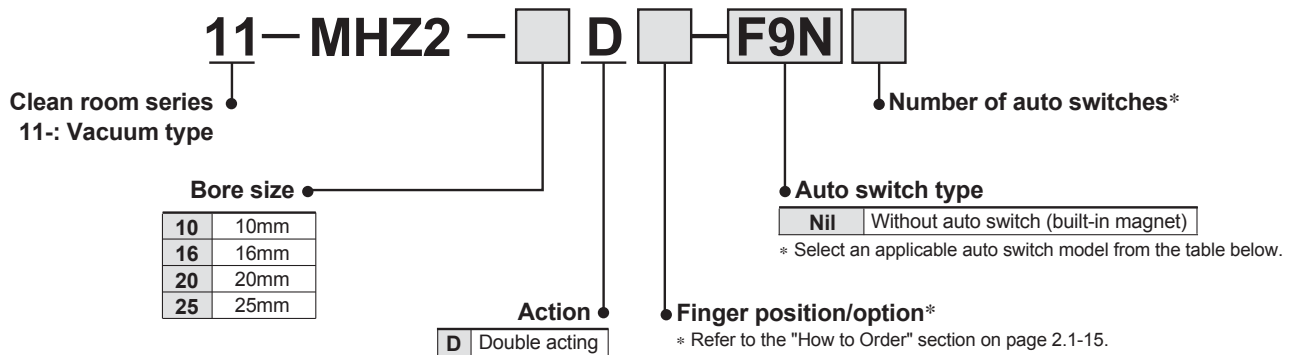

**Applicable auto switches\*** Refer to pages 2.11-1 for detailed auto switch specifications

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*				Applicable load	
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)	Flexible lead wire (-61)		
							Perpendicular	In-line						
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	12V	—	F9NV	F9N	●	●	—	○	— Relay, PLC
				3 wire (PNP)				F8N	—	●	●	○	○	
				2 wire				F9PV	F9P	●	●	—	○	
				F8P				—	●	●	○	○		
				F9BV				F9B	●	●	—	○		
				F8B				—	●	●	○	○		

\* Lead wire length symbols: 0.5m ..... Nil (Example) F9N  
 3m ..... L (Example) F9NL  
 5m ..... Z (Example) F9NZ

\* Auto switches marked with a "O" symbol are produced upon receipt of order.

Note 1) When using a D-F8□ switch, mount it at a distance of 10mm or more from magnetic substances such as iron, etc.

Note 2) Add "-61" at the end of the part number for the flexible lead wire.

(Examples)

When ordering with an air gripper

MHZ  2-16D-F9NVS-61

● Flexible lead wire

When ordering auto switches only

D-F9PL-61



● Flexible lead wire

These auto switches have been changed  
 Contact SMC or view [www.smworld.com](http://www.smworld.com)

F9N → M9N	F9NV → M9NV
F9P → M9P	F9PV → M9PV
F9B → M9B	F9BV → M9BV

**Specifications**

Fluid	Air
Operating pressure	ø10: 0.2 to 0.7MPa ø16 to ø25: 0.1 to 0.7MPa
Ambient and fluid temperature	-10 to 60°C
Repeatability	±0.01mm
Maximum operating frequency	180 c.p.m.
Lubrication	Non-lube
Action	Double acting
Particulate generation grade	Grade 2
Auto switch (option)	Solid state switch (3 wire, 2 wire)

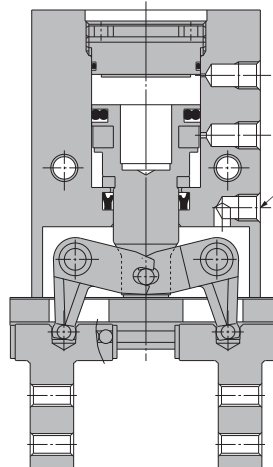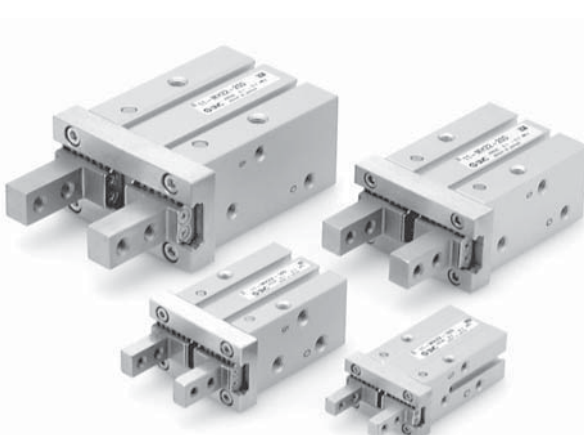

**Relief port**

The concentrated vacuuming of internally generated particulates prevents them from spreading into the clean room.

For details, refer to SMC Information "Clean Series: Air Gripper Series 11-MHZ2" (98-E461).


MHZ  
 MHQ  
 MHL2  
 MHR  
 MHK  
 MHS

MHC2  
 MHT2  
 MHY2  
 MHW2  
 MRHQ  
 Auto Switch


# Series MHZ2

## Construction/MHZ2-6□


### Double acting/with fingers open

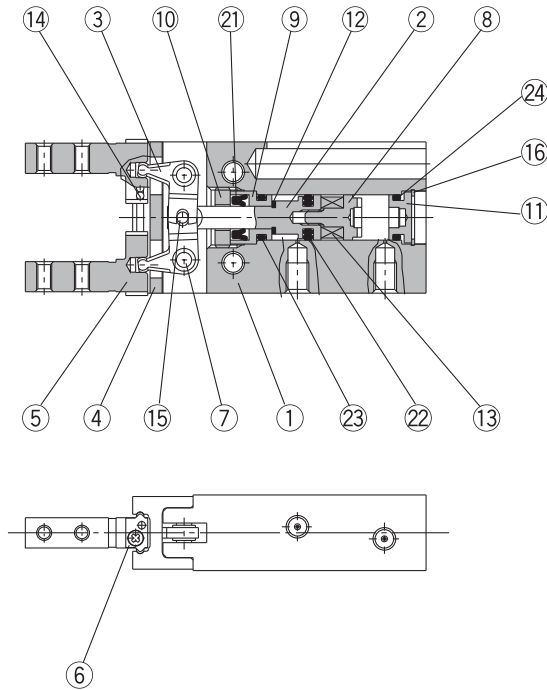


### Double acting/with fingers closed

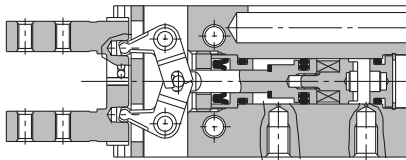

### Single acting/normally open

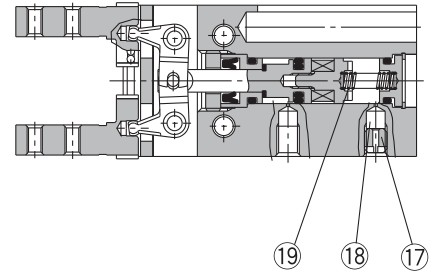

### Single acting/normally closed

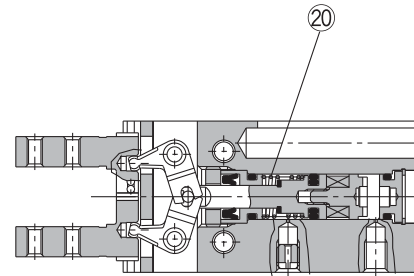

#### Parts list

No.	Description	Material	Note
1	<b>Body</b>	Aluminum alloy	Hard anodized
2	<b>Piston</b>	Stainless steel	
3	<b>Lever</b>	Stainless steel	Heat treated
4	<b>Guide</b>	Stainless steel	Heat treated
5	<b>Finger</b>	Stainless steel	Heat treated
6	<b>Roller stopper</b>	Stainless steel	
7	<b>Lever shaft</b>	Stainless steel	Nitrided
8	<b>Magnet holder</b>	Stainless steel	
9	<b>Holder</b>	Brass	Electroless nickel plated
10	<b>Holder lock</b>	Stainless steel	
11	<b>Cap</b>	Aluminum alloy	Clear anodized
12	<b>Bumper</b>	Urethane rubber	
13	<b>Magnet</b>	Rare earth magnet	Nickel plated

#### Parts list

No.	Description	Material	Note
14	<b>Steel balls</b>	High carbon chromium bearing steel	
15	<b>Needle roller</b>	High carbon chromium bearing steel	
16	<b>C type snap ring</b>	Carbon steel	Nickel plated
17	<b>Exhaust plug</b>	Brass	Electroless nickel plated
18	<b>Exhaust filter</b>	Polyvinyl formal	
19	<b>N.O. spring</b>	Stainless steel spring wire	
20	<b>N.C. spring</b>	Stainless steel spring wire	
21	<b>Rod seal</b>	NBR	
22	<b>Piston seal</b>	NBR	
23	<b>Gasket</b>	NBR	
24	<b>Gasket</b>	NBR	

#### Replacement parts: Seal kits



Seal kit no.	Description
MHZ6-PS	Kit includes items 21, 22, 23 and 24 from the table above.

\* Seal kits consist of items 21, 22, 23 and 24 in one kit, and can be ordered using the seal kit number.


Note) Contact SMC when replacing seals.

**Construction/MHZ2-10□ to 40□**


**Double acting/with fingers open**

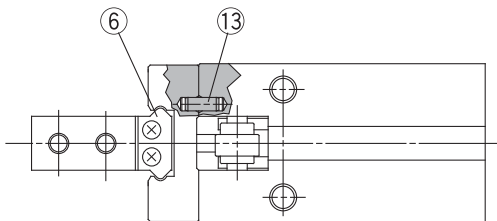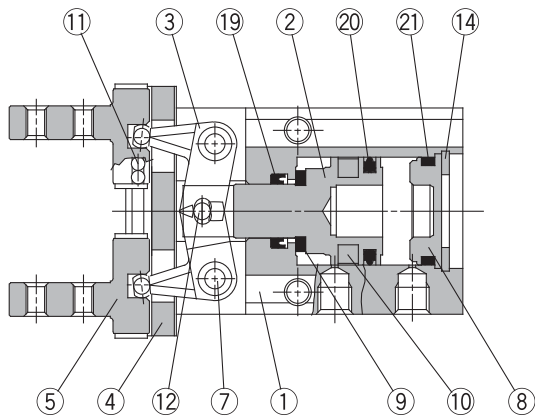


**Double acting/with fingers closed**

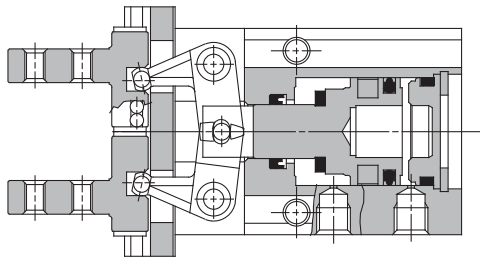

**Single acting/normally open**

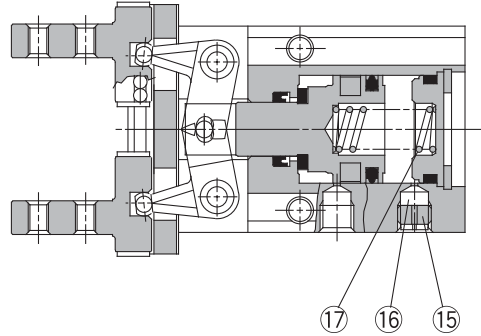

**Single acting/normally closed**

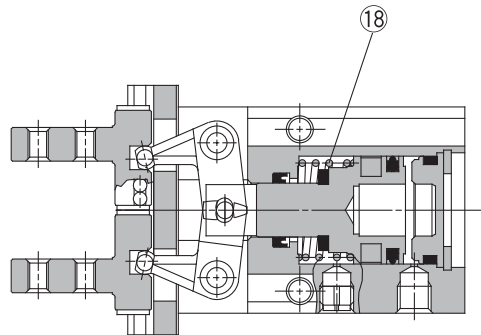

**Parts list**

No.	Description	Material	Note
1	<b>Body</b>	Aluminum alloy	Hard anodized
2	<b>Piston</b>	ø10, ø16: Stainless steel ø20 to ø40: Aluminum alloy	ø20 to ø40: Hard anodized
3	<b>Lever</b>	Stainless steel	Heat treated
4	<b>Guide</b>	Stainless steel	Heat treated
5	<b>Finger</b>	Stainless steel	Heat treated
6	<b>Roller stopper</b>	Stainless steel	
7	<b>Lever shaft</b>	Stainless steel	Nitrided
8	<b>Cap</b>	ø10 to ø25: Synthetic resin ø32, ø40: Aluminum alloy	ø32, ø40: Clear anodized
9	<b>Bumper</b>	Urethane rubber	
10	<b>Rubber magnet</b>	Synthetic rubber	

**Parts list**

No.	Description	Material	Note
11	<b>Steel balls</b>	High carbon chromium bearing steel	
12	<b>Needle roller</b>	High carbon chromium bearing steel	
13	<b>Parallel pin</b>	Stainless steel	
14	<b>C type snap ring</b>	Carbon steel	Nickel plated
15	<b>Exhaust plug A</b>	Brass	Electroless nickel plated
16	<b>Exhaust filter A</b>	Polyvinyl formal	
17	<b>N.O. spring</b>	Stainless steel spring wire	
18	<b>N.C. spring</b>	Stainless steel spring wire	
19	<b>Rod seal</b>	NBR	
20	<b>Piston seal</b>	NBR	
21	<b>Gasket</b>	NBR	

**Replacement parts: Seal kits**

Seal kit no.						Description
<b>MHZ2-10D</b>	<b>MHZ2-16D</b>	<b>MHZ2-20D</b>	<b>MHZ2-25D</b>	<b>MHZ2-32D</b>	<b>MHZ2-40D</b>	Kits include items 19, 20 and 21 from the table above.
MHZ10-PS	MHZ16-PS	MHZ20-PS	MHZ25-PS	MHZ32-PS	MHZ40-PS	

\* Seal kits consist of items 19, 20 and 21 in one kit, and can be ordered using the seal kit number for each cylinder bore size.

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto Switch

# Series MHZ2


## Dimensions

Scale: 100%


MHZ2-6□

Double acting/Single acting


Basic type

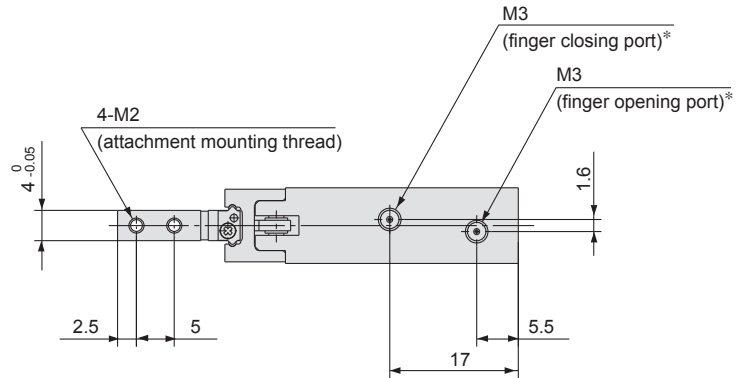

\* For single action, the port on one side is a breathing hole.

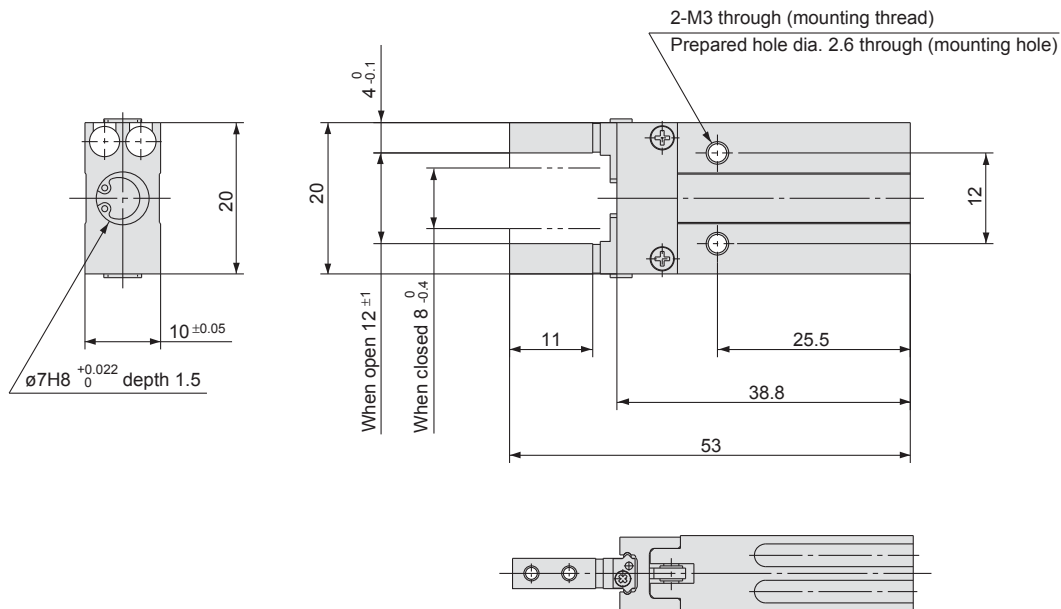


### Auto switch mounting groove dimensions

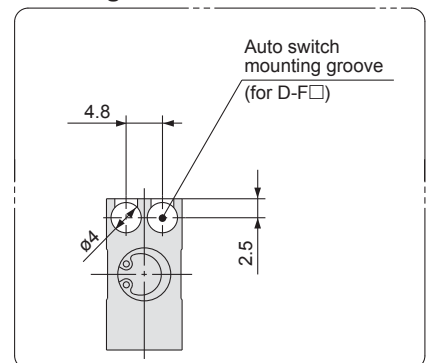




**MHZ2-10□**

**Double acting/Single acting  
Basic type**


**Scale: 90%**

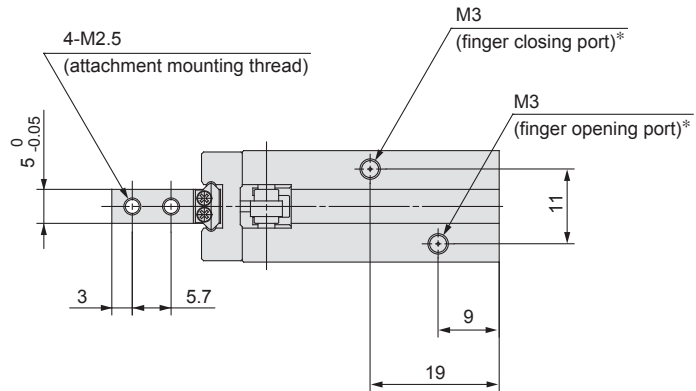

\* For single action, the port on one side is a breathing hole.

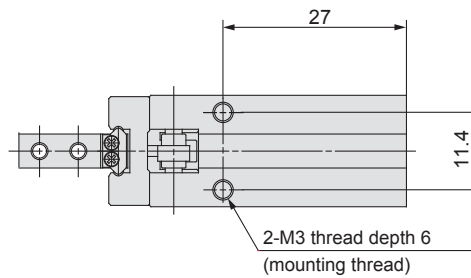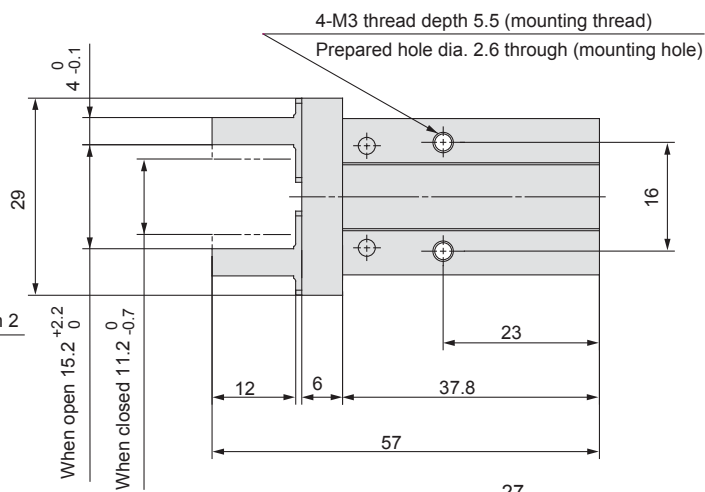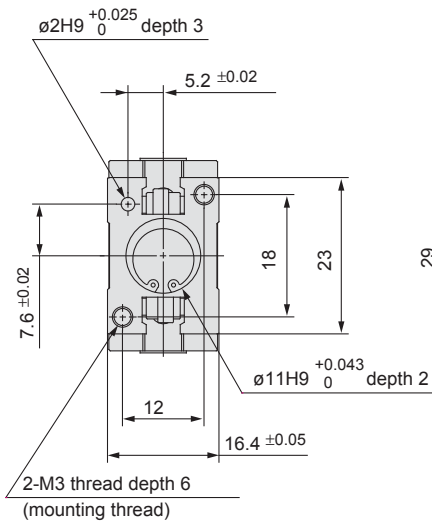


**Auto switch mounting groove dimensions**

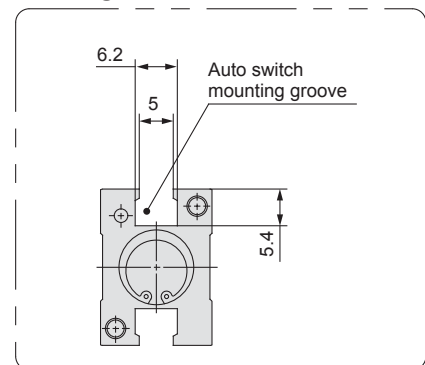

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

**Finger position/Narrow type**

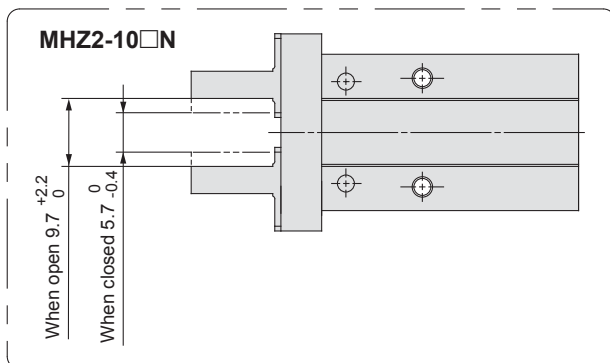

**MHZ**

**MHQ**

**MHL2**

**MHR**

**MHK**

**MHS**

**MHC2**

**MHT2**

**MHY2**

**MHW2**

**MRHQ**


**Auto Switch**

# Series MHZ2


## Dimensions

**MHZ2-16□**  
**Double acting/Single acting**  
**Basic type**

**Scale: 65%**

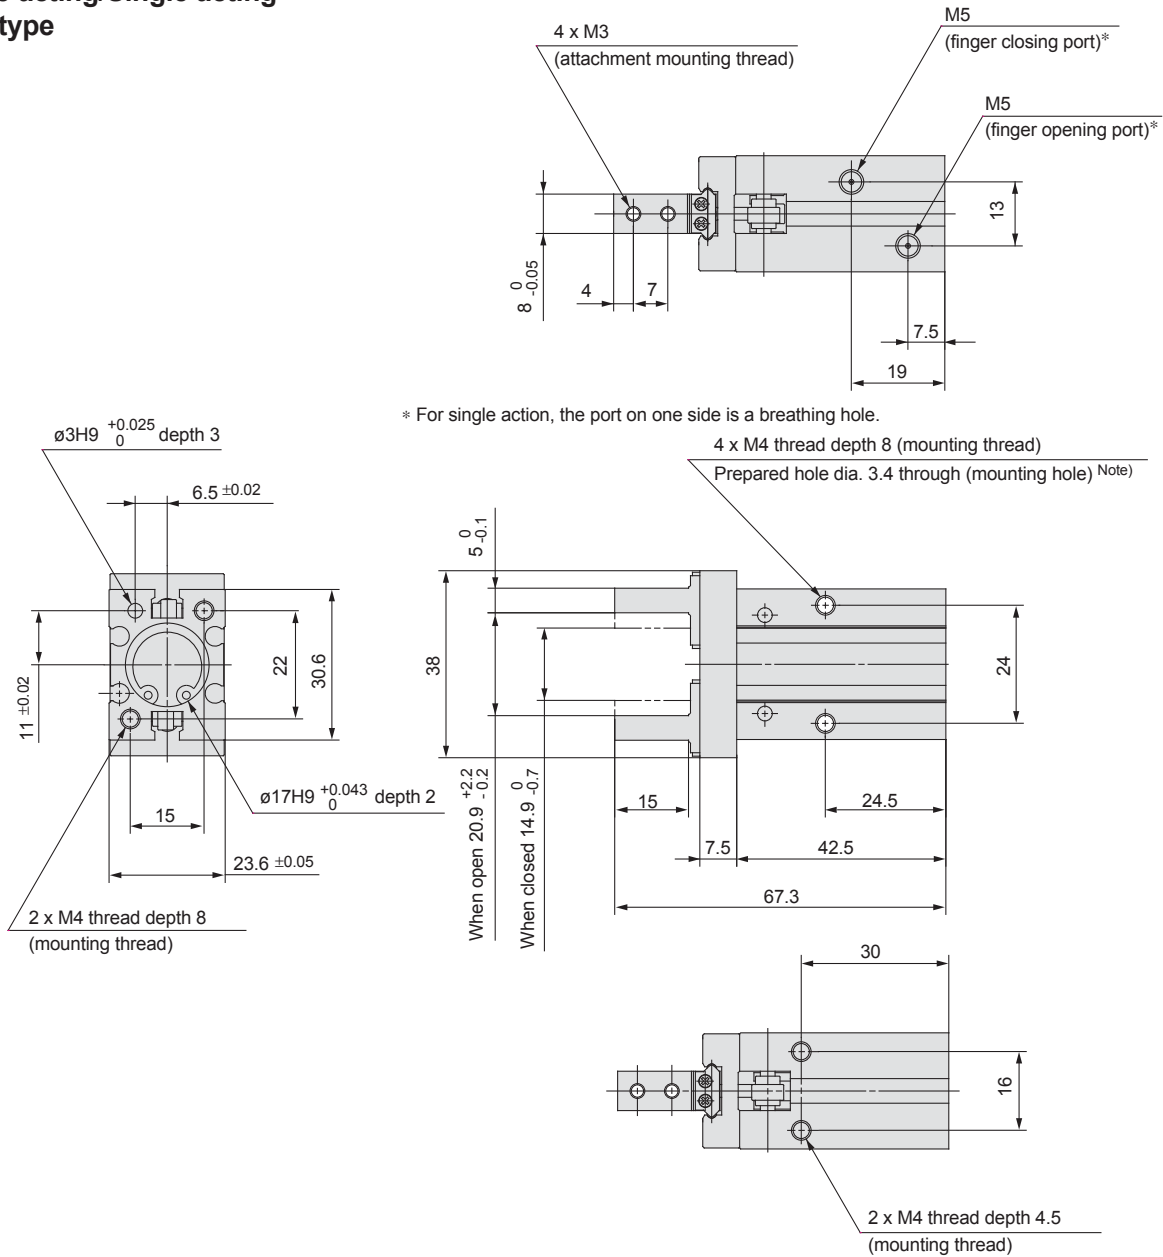


### Auto switch mounting groove dimensions

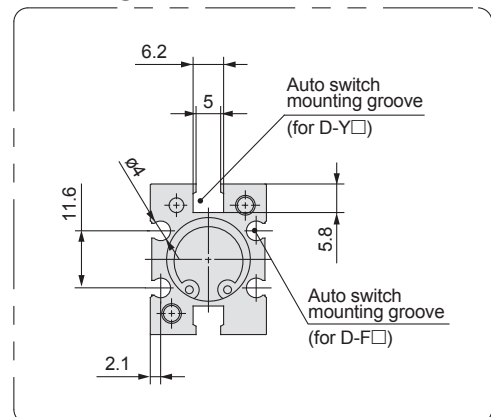

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

### Finger position/Narrow type

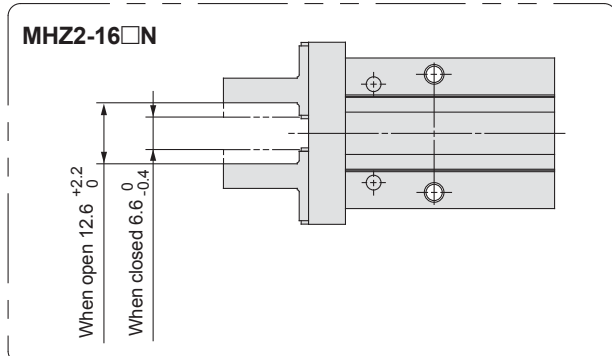







**MHZ2-20□**

**Double acting/Single acting**  
**Basic type**

**Scale: 60%**

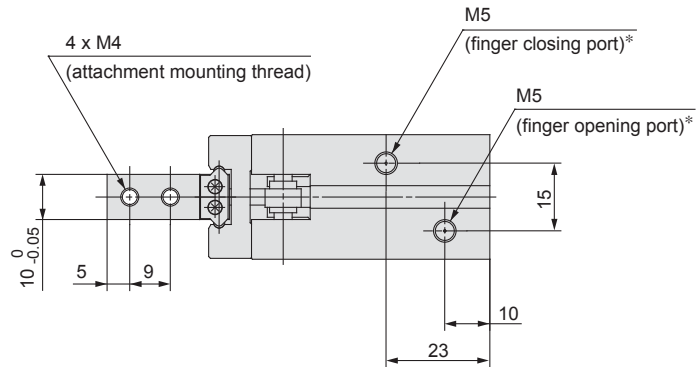

\* For single action, the port on one side is a breathing hole.

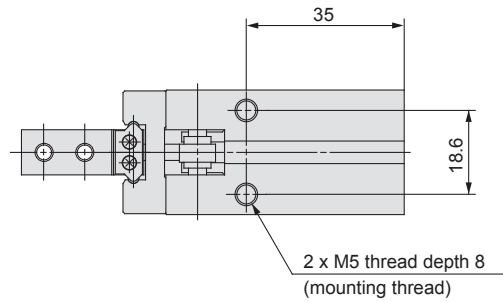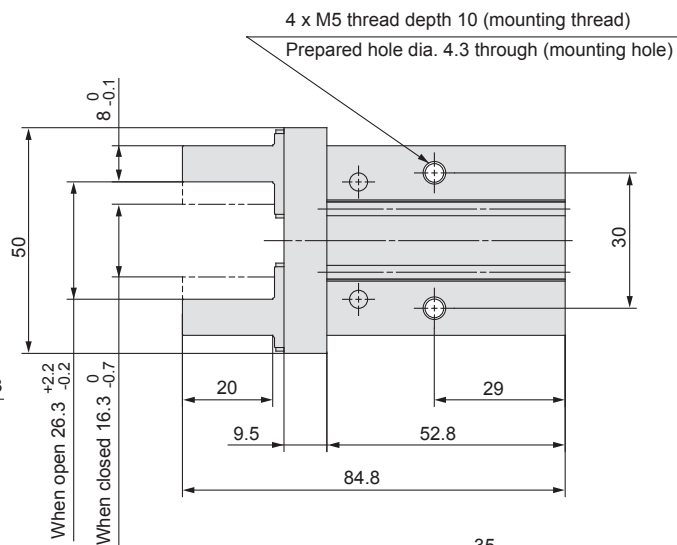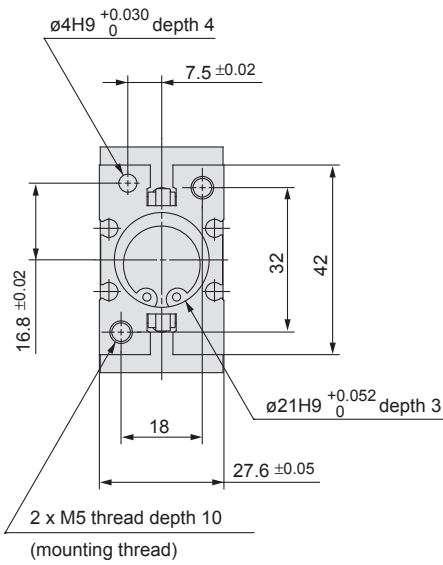

**MHZ**

**MHQ**

**MHL2**

**MHR**

**MHK**

**MHS**

**MHC2**

**MHT2**


**MHY2**

**MHW2**


**MRHQ**

**Auto Switch**

**Finger position/Narrow type**

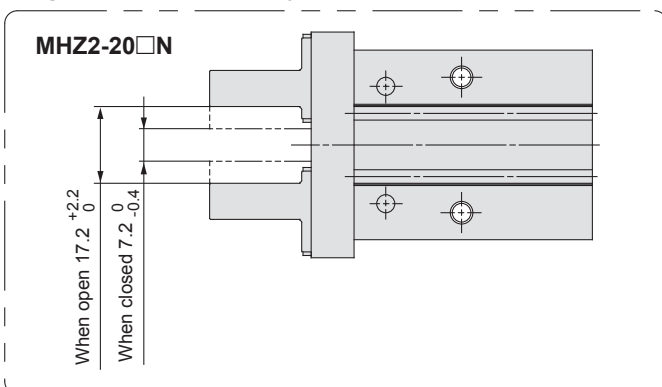

**Auto switch mounting groove dimensions**

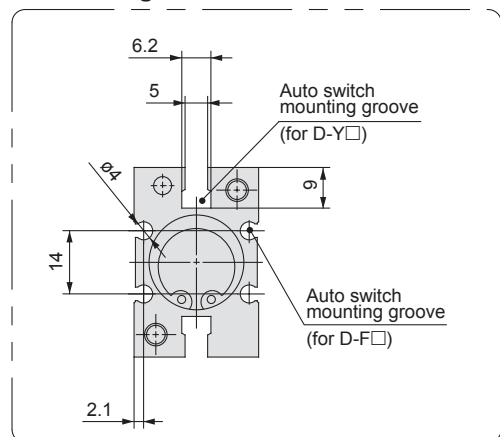

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

# Series MHZ2


## Dimensions

MHZ2-25□

Double acting/Single acting


Basic type

Scale: 50%

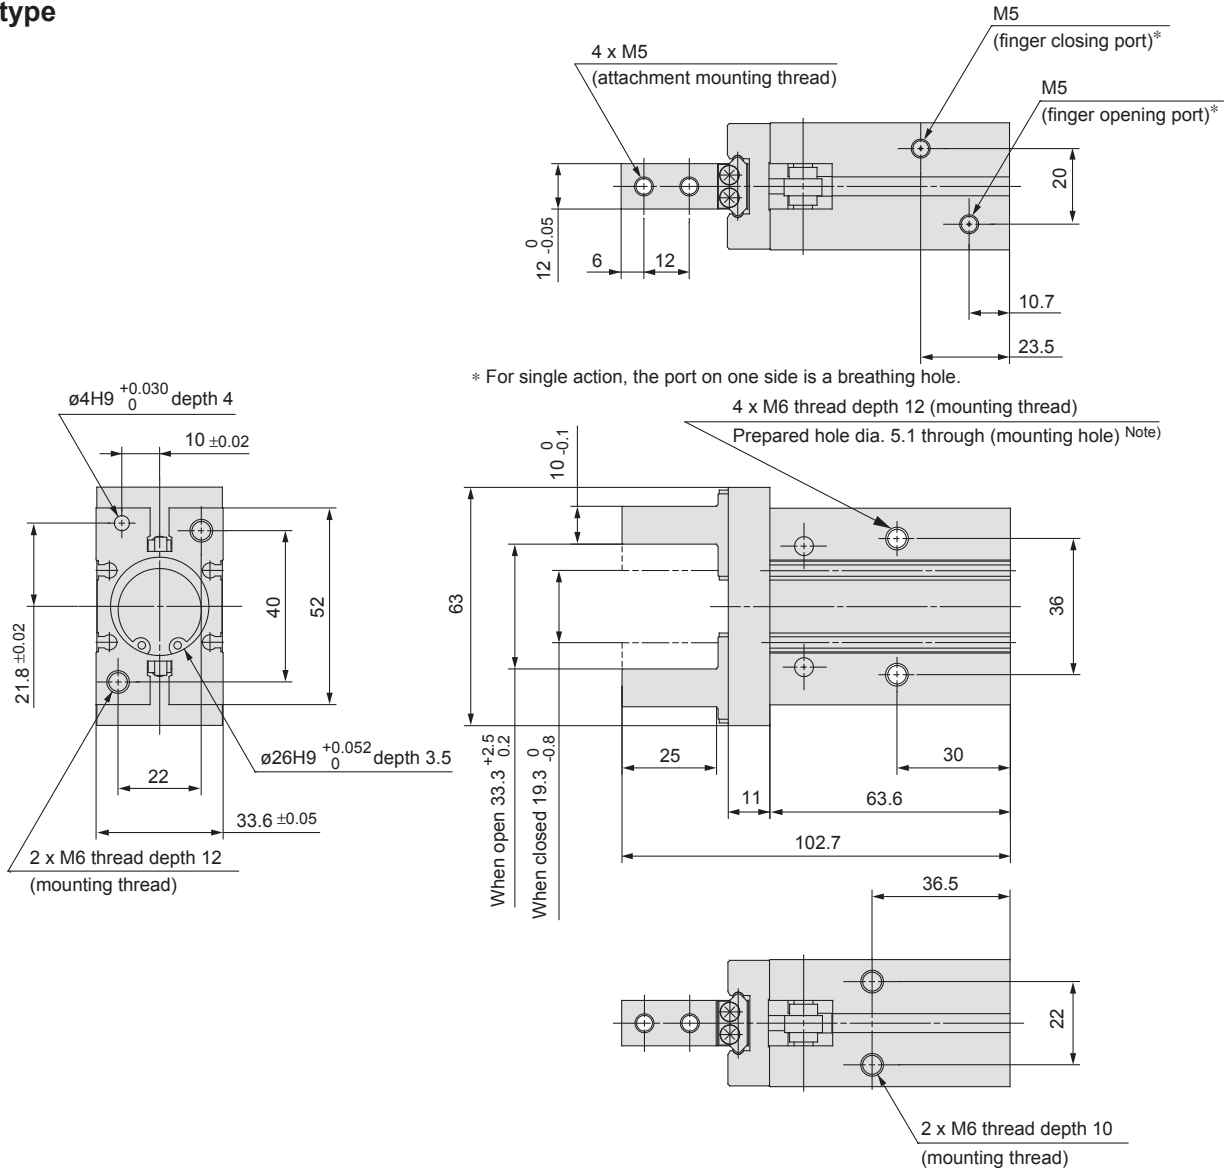


### Finger position/Narrow type

MHZ2-25□N

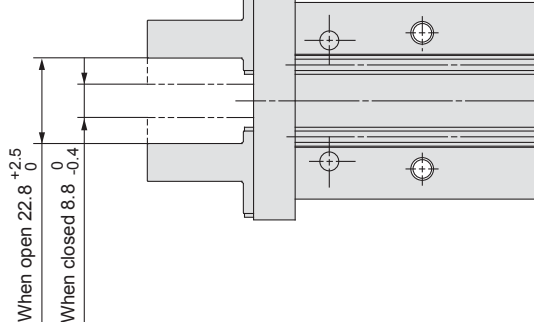

### Auto switch mounting groove dimensions

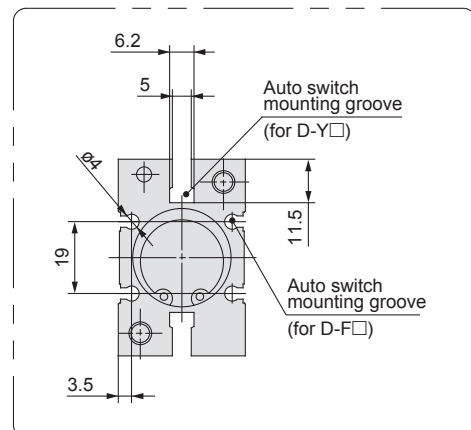


Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.




**MHZ2-32**  
 Double acting/Single acting  
 Basic Type

**Scale: 40%**

The values inside ( ) are dimensions for the single acting type.

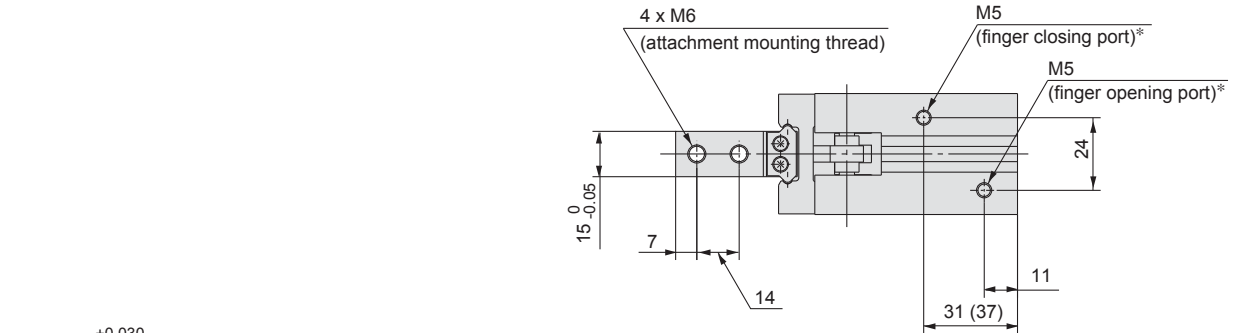

\* For single action, the port on one side is a breathing hole.

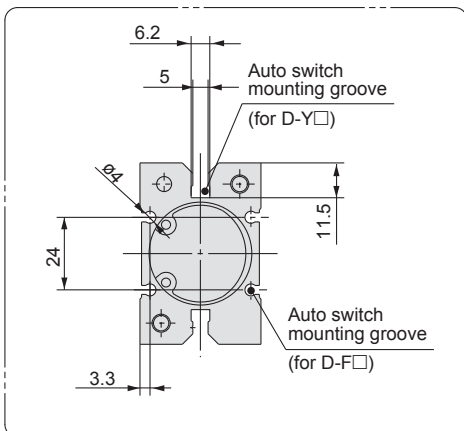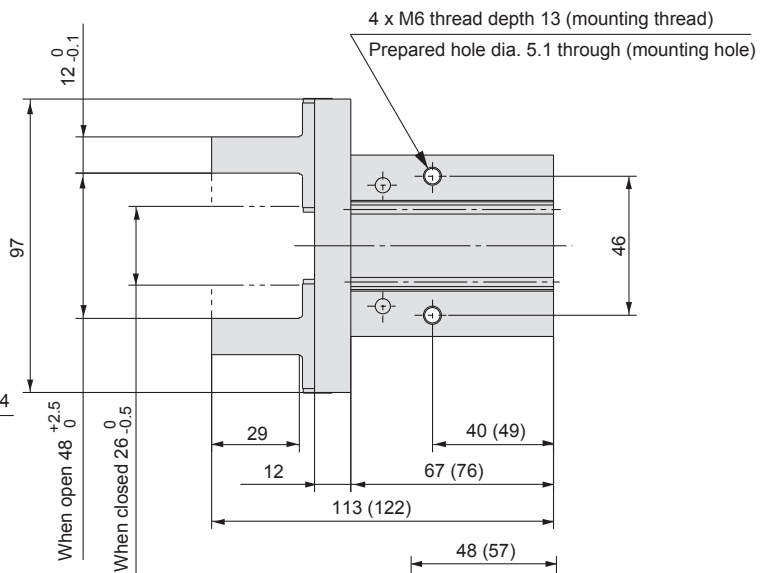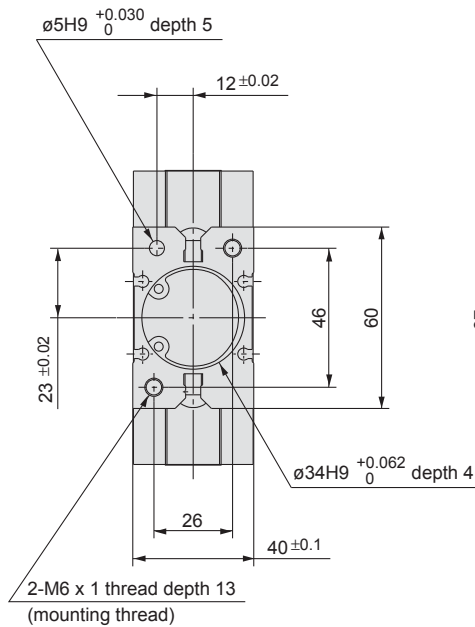

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

- MHZ
- MHQ
- MHL2
- MHR
- MHK
- MHS

- MHC2
- MHT2
- MHY2
- MHW2
- MRHQ
- Auto Switch

# Series MHZ2

## Dimensions


MHZ2-40□

Double acting/Single acting

Basic type

Scale: 40%





The values inside ( ) are dimensions for the single acting type.

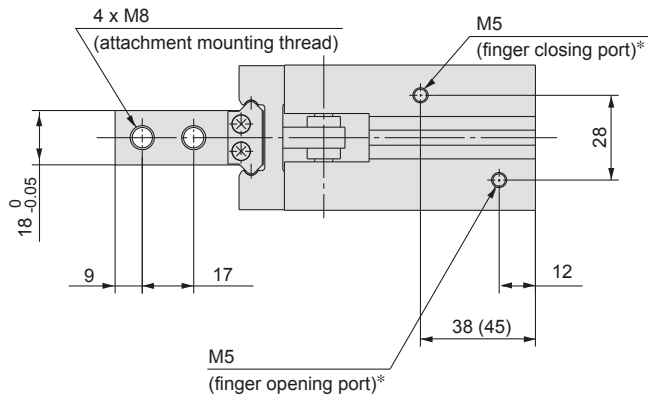

\* For single action, the port on one side is a breathing hole.

4 x M8 thread depth 16 (mounting thread)

Prepared hole dia. 6.6 through (mounting thread) <sup>Note)</sup>

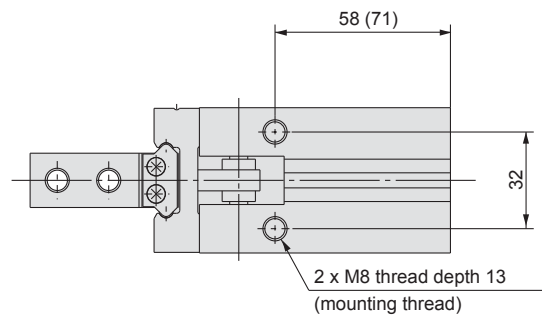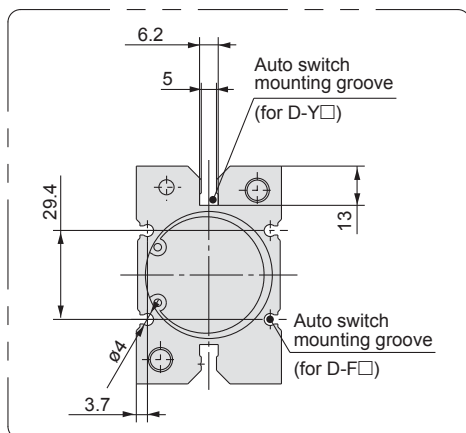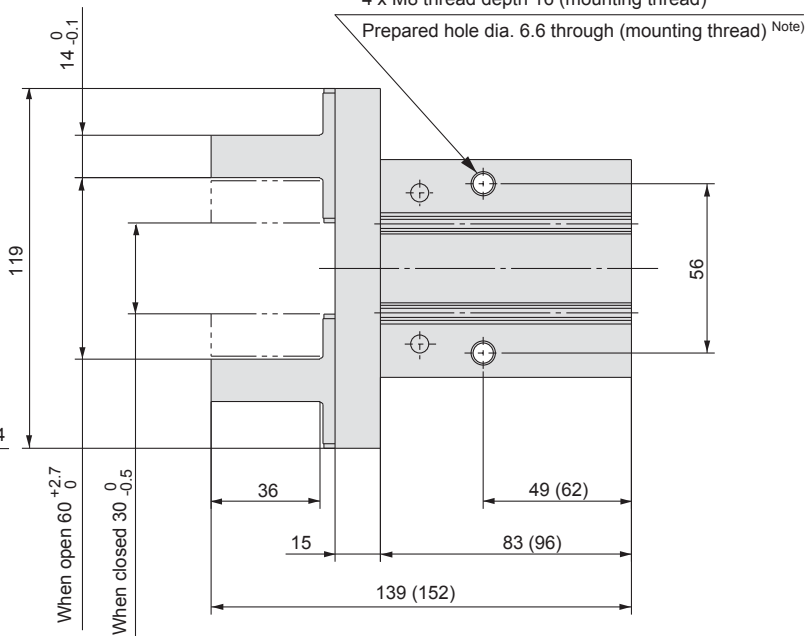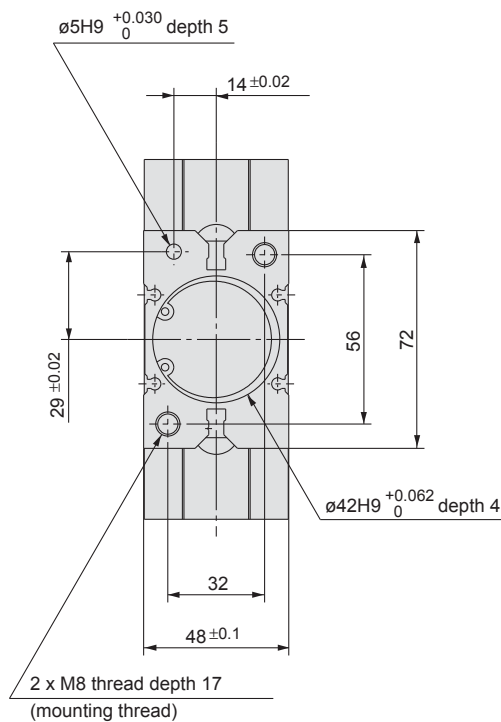


Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

# Standard Type/Series MHZ2

## Finger Options

### Side Tapped Mounting [1/N1]

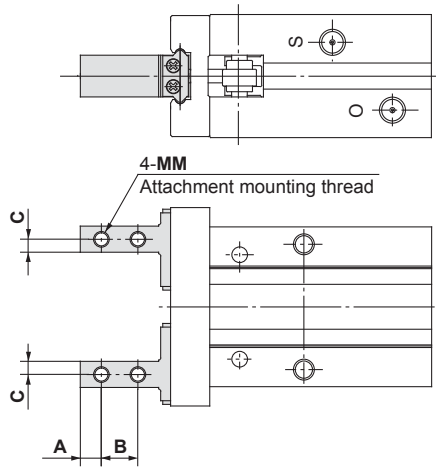


Unit: mm

Model	A	B	C	MM
MHZ2- 6□1	2.5	5	2	M2
MHZ2-10□ <sup>1</sup> <sub>N1</sub> □	3	5.7	2	M2.5
MHZ2-16□ <sup>1</sup> <sub>N1</sub> □	4	7	2.5	M3
MHZ2-20□ <sup>1</sup> <sub>N1</sub> □	5	9	4	M4
MHZ2-25□ <sup>1</sup> <sub>N1</sub> □	6	12	5	M5
MHZ2-32□1□	7	14	6	M6
MHZ2-40□1□	9	17	7	M8

\* Specifications and dimensions other than the above are the same as the basic type (including narrow type).

### Through Holes in Opening/Closing Direction [2/N2]

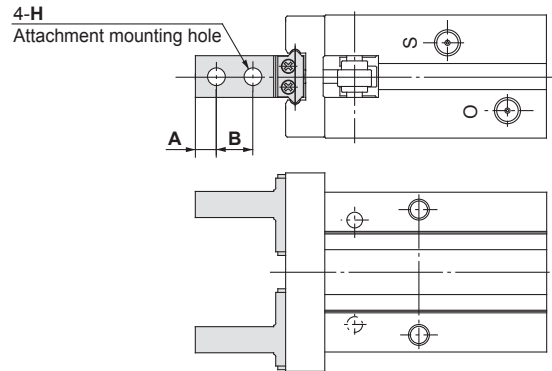


Unit: mm

Model	A	B	H
MHZ2- 6□2	2.5	5	2.4
MHZ2-10□ <sup>2</sup> <sub>N2</sub> □	3	5.7	2.9
MHZ2-16□ <sup>2</sup> <sub>N2</sub> □	4	7	3.4
MHZ2-20□ <sup>2</sup> <sub>N2</sub> □	5	9	4.5
MHZ2-25□ <sup>2</sup> <sub>N2</sub> □	6	12	5.5
MHZ2-32□2□	7	14	6.6
MHZ2-40□2□	9	17	9

\* Specifications and dimensions other than the above are the same as the basic type (including narrow type).

### Flat Type Fingers [3]

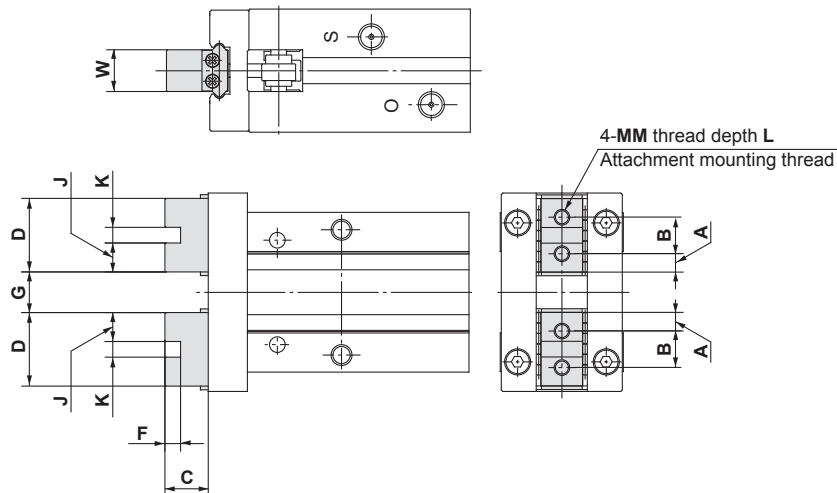

Unit: mm

Model	A	B	C	D	F	G		J	K	MM	L	W	Weight g
						Open	Closed						
MHZ2- 6□3 *1)	2	3.5	7.2	7.5	—	5 <sup>+1.2</sup> <sub>-0.8</sub>	1 <sup>+0.2</sup> <sub>0</sub>	—	—	M2	3	4 <sup>0</sup> <sub>-0.05</sub>	26
MHZ2-10□3□ *2), *3)	2.45	6	5.2	10.9	2	5.4 <sup>+2.2</sup> <sub>0</sub>	1.4 <sup>0</sup> <sub>-0.2</sub>	4.45	2H9 <sup>+0.025</sup> <sub>0</sub>	M2.5	5	5 <sup>0</sup> <sub>-0.05</sub>	55
MHZ2-16□3□ *2), *3)	3.05	8	8.3	14.1	2.5	7.4 <sup>+2.2</sup> <sub>0</sub>	1.4 <sup>0</sup> <sub>-0.2</sub>	5.8	2.5H9 <sup>+0.025</sup> <sub>0</sub>	M3	6	8 <sup>0</sup> <sub>-0.05</sub>	115
MHZ2-20□3□ *2), *3)	3.95	10	10.5	17.9	3	11.6 <sup>+2.3</sup> <sub>0</sub>	1.6 <sup>0</sup> <sub>-0.2</sub>	7.45	3H9 <sup>+0.025</sup> <sub>0</sub>	M4	8	10 <sup>0</sup> <sub>-0.05</sub>	235
MHZ2-25□3□ *2), *3)	4.9	12	13.1	21.8	4	16 <sup>+2.5</sup> <sub>0</sub>	2 <sup>0</sup> <sub>-0.2</sub>	8.9	4H9 <sup>+0.030</sup> <sub>0</sub>	M5	10	12 <sup>0</sup> <sub>-0.05</sub>	420
MHZ2-32□3□	7.3	20	18	34.6	5	25 <sup>+2.7</sup> <sub>0</sub>	3 <sup>0</sup> <sub>-0.2</sub>	14.8	5H9 <sup>+0.030</sup> <sub>0</sub>	M6	12	15 <sup>0</sup> <sub>-0.05</sub>	740 (785) *4)
MHZ2-40□3□	8.7	24	22	41.4	6	33 <sup>+2.9</sup> <sub>0</sub>	3 <sup>0</sup> <sub>-0.2</sub>	17.7	6H9 <sup>+0.030</sup> <sub>0</sub>	M8	16	18 <sup>0</sup> <sub>-0.05</sub>	1335 (1430) *4)

\*1) To mount attachments, use M2 hexagon socket head cap screws with  $\phi 3.3$  top diameter, or JISB1101 type M2 round head screws.

\*2) Specifications and dimensions other than the above are the same as the basic type (including narrow type).

\*3) The overall length is the same as the MHQ(G) flat finger type.

\*4) The values inside ( ) are for the single acting type.

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto Switch


# Standard Type/Series MHZ2

## Body Options: End Boss Type

### Applicable Models

Symbol	Piping port position	Type of Piping Port				Applicable model		
		MHZZ-10	MHZZ-16	MHZZ-20	MHZZ-25	Double acting	Single acting	
						Normally open	Normally closed	
E	Side ported	M3	M5		●	●	●	
W	Axial port	With $\varnothing 4$ One-touch fitting for coaxial tube				●	—	—
K		With $\varnothing 4$ One-touch fitting				—	●	●
M		M5 x 0.8				—	●	●

### Side Ported [E]

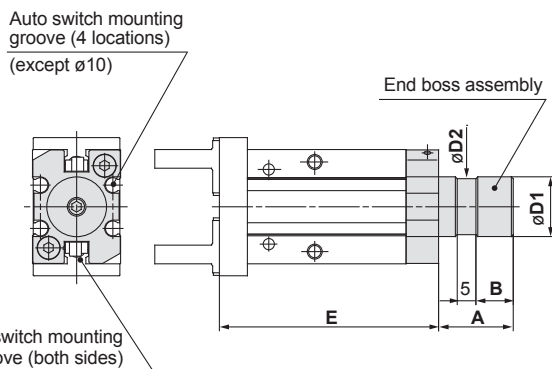


- \* Refer to the dimension table.
- \* When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	Kit no.	A	B	D1	D2	E
MHZZ-10□□	MHZ-A1010	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	52.8
MHZZ-16□□	MHZ-A1610	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	58.7
MHZZ-20□□	MHZ-A2010	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	70.5
MHZZ-25□□	MHZ-A2510	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	82.9

Other dimensions and specifications correspond to the standard type.

### Axial Port (One-Touch Fitting for Coaxial Tubing) [W]

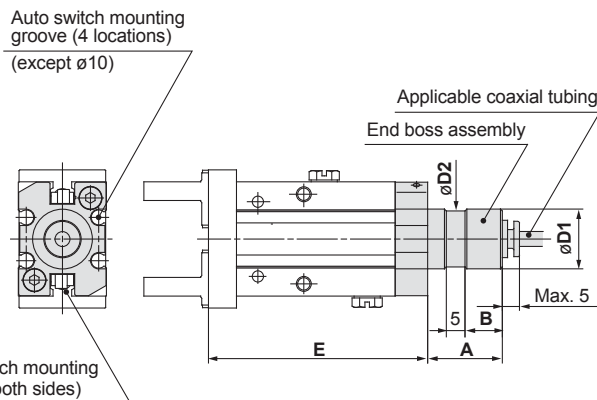

- \* Refer to the dimension table.
- \* When auto switches are used, side mounting with through holes is not possible.


Unit: mm

Model	A	B	D1	D2	E
MHZZ-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	52.8
MHZZ-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	58.7
MHZZ-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	70.5
MHZZ-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	82.9

Other dimensions and specifications correspond to the standard type.

#### Applicable coaxial tubing


#### Reference symbol



Specification	Model	TW04B-20
Outside diameter		4mm
Max. operating pressure		0.6MPa
Min. bending radius		10mm
Operating temperature		-20 to 60°C
Material		Nylon 12


### Changing from Coaxial to Single Tubing

Changing to single tubing is possible by using a branch "Y" or branch tee fitting. In this case particularly, single tube fittings and tubing for  $\varnothing 3.2$  will be necessary.

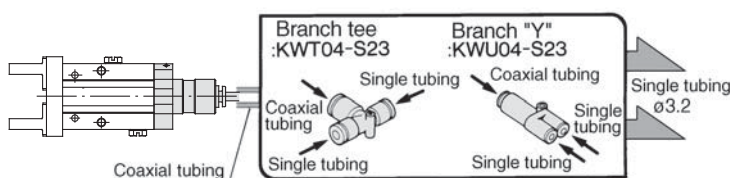


### Branch tee, Different diameter tee, Branch "Y", Male run tee

Refer to catalog CAT.E004-A "Coaxial Air Tubing System" regarding coaxial tubing.

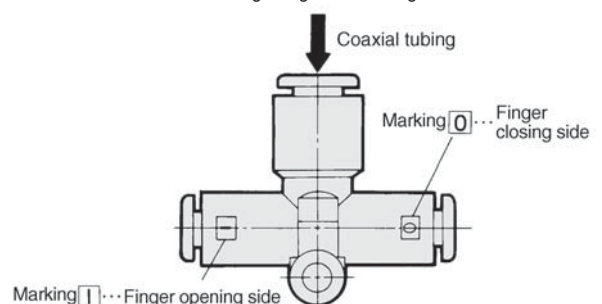

### Axial Port (with One-touch Fitting) [K]

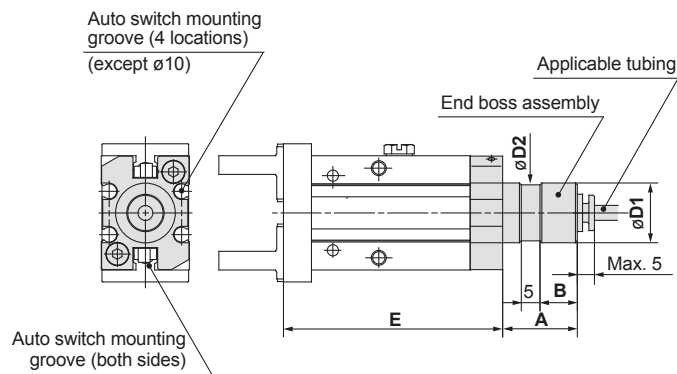

\* Refer to the dimension table.  
 \* When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E
MHZ2-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	52.8
MHZ2-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	58.7
MHZ2-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	70.5
MHZ2-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	82.9


Other dimensions and specifications correspond to the standard type.

#### Applicable tubing

Description/ Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
	T0425	TS0425	TU0425	TCU0425B-1
Specification				
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Min. bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane

Refer to catalog CAT. E501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

### Axial Port (M5 Port) [M]

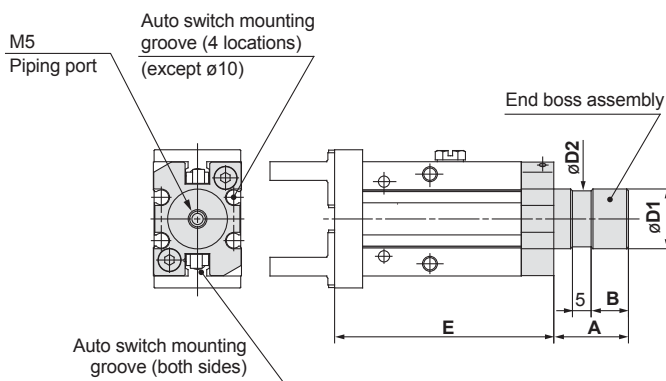

\* Refer to the dimension table.  
 \* When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E
MHZ2-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	52.8
MHZ2-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	58.7
MHZ2-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	70.5
MHZ2-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	82.9

Other dimensions and specifications correspond to the standard type.

### Weights

Unit: g

Model	End boss type (symbol)			
	E	W	K	M
MHZ2-10□□	65	64	66	65
MHZ2-16□□	148	147	148	147
MHZ2-20□□	277	277	277	277
MHZ2-25□□	495	495	496	494

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto Switch

# Long Stroke Series *MHZL2*

## How to Order

**MHZL2** — **16** **D** **F9PV**

Number of fingers  
2 2 fingers

Bore size

10	10mm
16	16mm
20	20mm
25	25mm

Action

D	Double acting
S	Single acting (normally open)
C	Single acting (normally closed)

Finger option

Body option



Number of auto switches

Nil	2 pcs.
S	1 pc.

Auto switch type

Nil	Without auto switch (built-in magnet)
-----	---------------------------------------

\* Select an applicable auto switch model from the table below.

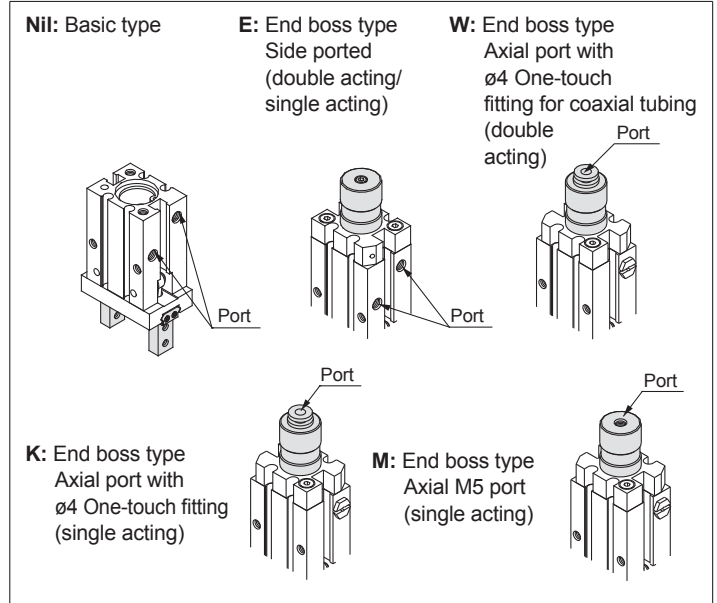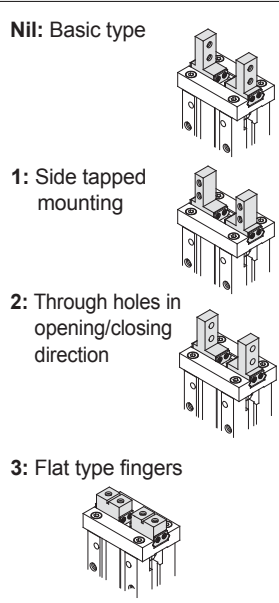

These auto switches have been changed. Contact SMC or view [www.smcworld.com](http://www.smcworld.com)

F9N	→	M9N	F9NV	→	M9NV
F9P	→	M9P	F9PV	→	M9PV
F9B	→	M9B	F9BV	→	M9BV

### Applicable auto switches/\* Refer to pages 2.11-1 for detailed auto switch specifications.

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*			Flexible lead wire (-61)	Applicable load	Applicable model										
					DC	AC	Perpendicular	In-line	0.5 (Nil)	3 (L)	5 (Z)			ø10	ø16	ø20	ø25							
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	—	Y69A	Y59A	●	●	○	Standard	IC circuit	●	●	●	●							
							F9NV	F9N	●	●	—			○	—	—	—	—						
							F8N	—	●	●	○			○	—	—	—	—						
							F9PV	F9P	●	●	—			○	—	—	—	—						
							F8P	—	●	●	○			○	—	—	—	—						
							Y69B	Y59B	●	●	○			○	—	—	—	—						
				Diagnostic indication (2 colour indicator)	—	Grommet	Yes	2 wire	24V	—	F9BV	F9B	●	●	—	○	—	Relay, PLC	—	●	●	●		
											F8B	—	●	●	○	○			—	—	—	—		
											Y7NWV	Y7NW	●	●	○	○			Standard	IC circuit	—	—	—	—
											F9NWV	F9NW	●	●	○	○			—	—	—	—	—	
											Y7PWV	Y7PW	●	●	○	○			Standard	IC circuit	—	—	—	—
											F9PWV	F9PW	●	●	○	○			—	—	—	—	—	—
											Y7BWV	Y7BW	●	●	○	○			Standard	—	—	—	—	—
											F9BWV	F9BW	●	●	○	○			—	—	—	—	—	—

\* Lead wire length symbols: 0.5m ..... Nil (Example) F9N  
3m ..... L (Example) F9NL  
5m ..... Z (Example) Y59AZ

\* Auto switches marked with a "○" symbol are produced upon receipt of order.

Note 1) Use caution regarding hysteresis in the 2 color indicator types. When using this type, refer to "Auto Switch Hysteresis" on page 2.1-52.

Note 3) Through hole mounting is not possible when using auto switch types D-Y59, D-Y69, or D-Y7.

Note 2) Add "-61" at the end of the part number for the flexible lead wire. (Examples)

When ordering with an air gripper

MHZ **2-16D-F9NVS-61**

Flexible lead wire

When ordering auto switches only

D-F9PL-**61**

Flexible lead wire



### Specifications




<b>Fluid</b>		Air	
<b>Operating pressure</b>	<b>Double acting</b>		ø10: 0.2 to 0.7MPa ø16 to ø25: 0.1 to 0.7MPa
	<b>Single acting</b>	<b>Normally open</b>	ø10: 0.35 to 0.7MPa
		<b>Normally closed</b>	ø16 to ø25: 0.25 to 0.7MPa
<b>Ambient and fluid temperature</b>		-10 to 60°C	
<b>Repeatability</b>		±0.01mm	
<b>Maximum operating frequency</b>		120c.p.m.	
<b>Lubrication</b>		Non-lube	
<b>Action</b>		Double acting, Single acting	
<b>Auto switch (option)</b> <small>Note)</small>		Solid state switch (3 wire, 2 wire)	


Note) Refer to pages 2.11-1 for details regarding auto switch specifications.

### Symbols:


#### Double acting type



#### Single acting type, normally open



#### Single acting type, normally closed



### Models

Action	Model	Bore size (mm)	Gripping force <small>Note 1)</small>		Opening/Closing stroke (both sides) mm	<small>Note 2)</small> Weight g	
			Gripping force per finger Effective value N				
			External gripping force	Internal gripping force			
Double acting	MHZL2-10D	10	11	17	8	60	
	MHZL2-16D	16	34	45	12	135	
	MHZL2-20D	20	42	66	18	270	
	MHZL2-25D	25	65	104	22	470	
Single acting	Normally open	MHZL2-10S	10	7.1	—	8	70
		MHZL2-16S	16	27		12	145
		MHZL2-20S	20	33		18	290
		MHZL2-25S	25	50		22	515
	Normally closed	MHZL2-10C	10	—	13	8	70
		MHZL2-16C	16		38	12	140
		MHZL2-20C	20		57	18	290
		MHZL2-25C	25		85	22	515

Note 1) Values based on pressure of 0.5MPa, gripping point L = 20mm, at center of stroke.

Note 2) Values excluding weight of auto switch.

### Options

#### • Body options/End boss type

Symbol	Piping port position	Type of piping port				Applicable model	
		MHZL2-10	MHZL2-16	MHZL2-20	MHZL2-25	Double acting	Single acting
Nil	Basic type	M3	M5			●	●
E	Side ported	M3	M5			●	●
W	Axial port	With ø4 One-touch fitting for coaxial tube				●	—
K	Axial port	With ø4 One-touch fitting				—	●
M	Axial port	M5				—	●

\* For detailed body option specifications, refer to option specifications on pages 2.1-39 and 2.1-40.

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2


MRHQ

Auto Switch


# Series MHZL2

## Construction/MHZL2-10□ to 25□

### Double acting/with fingers open

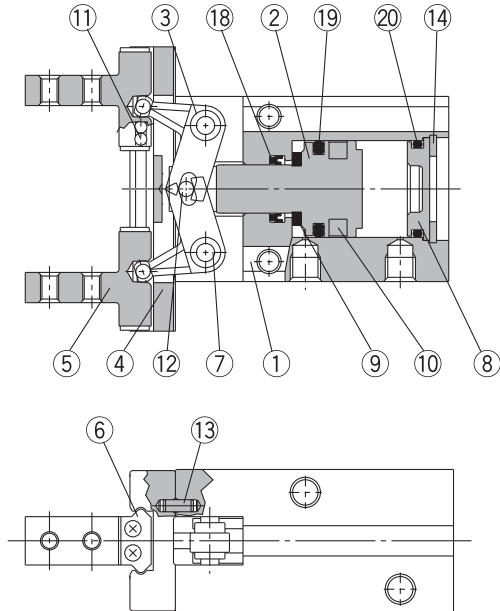


### Double acting/with fingers closed

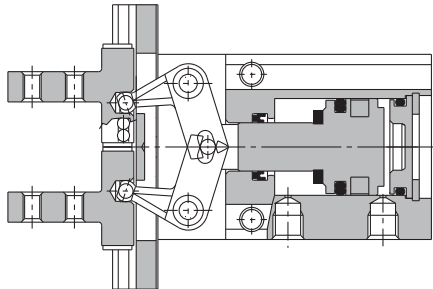


#### Parts list

No.	Description	Material	Note
1	<b>Body</b>	Aluminum alloy	Hard anodized
2	<b>Piston</b>	ø10, ø16: Stainless steel ø20, ø25: Aluminum alloy	ø20, ø25: Hard anodized
3	<b>Lever</b>	Stainless steel	Heat treated
4	<b>Guide</b>	Stainless steel	Heat treated
5	<b>Finger</b>	Stainless steel	Heat treated
6	<b>Roller stopper</b>	Stainless steel	
7	<b>Lever shaft</b>	Stainless steel	Nitrided
8	<b>Cap</b>	Aluminum alloy	Clear anodized
9	<b>Bumper</b>	Urethane rubber	
10	<b>Rubber magnet</b>	Synthetic rubber	

### Single acting/normally open

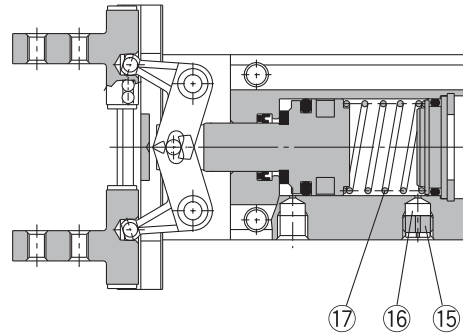

### Single acting/normally closed

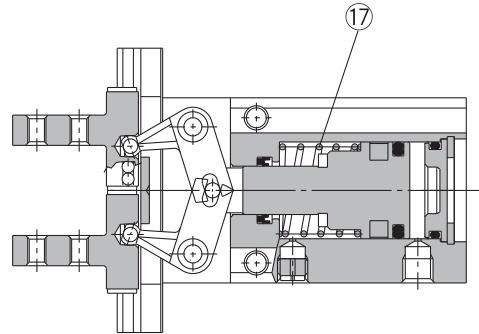

#### Parts list

No.	Description	Material	Note
11	<b>Steel balls</b>	High carbon chromium bearing steel	
12	<b>Needle roller</b>	High carbon chromium bearing steel	
13	<b>Parallel pin</b>	Stainless steel	
14	<b>C type snap ring</b>	Carbon steel	Nickel plated
15	<b>Exhaust plug A</b>	Brass	Electroless nickel plated
16	<b>Exhaust filter A</b>	Polyvinyl formal	
17	<b>Spring</b>	Stainless steel spring wire	
18	<b>Rod seal</b>	NBR	
19	<b>Piston seal</b>	NBR	
20	<b>O-ring</b>	NBR	

#### Replacement parts: Seal kits

Seal kit no.				Description
<b>MHZL2-10D</b>	<b>MHZL2-16D</b>	<b>MHZL2-20D</b>	<b>MHZL2-25D</b>	Kits include items 18, 19 and 20 from the table above.
MHZL10-PS	MHZL16-PS	MHZL20-PS	MHZL25-PS	


\* Seal kits consist of items 18, 19 and 20 in one kit, and can be ordered using the seal kit number for each cylinder bore size.

**Dimensions**




**MHZL2-10□**  
**Double acting/Single acting**  
**Basic type**

**Scale: 100%**


The values inside ( ) are dimensions for the single acting type.

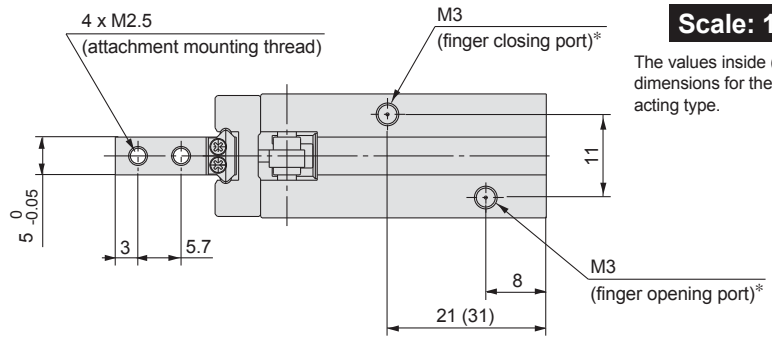

\* For single action, the port on one side is a breathing hole.

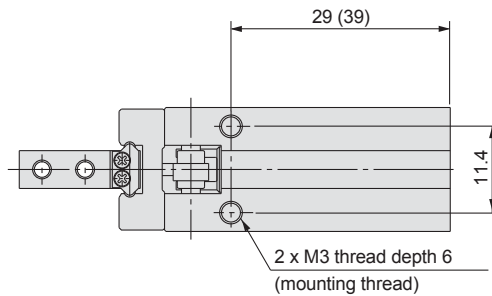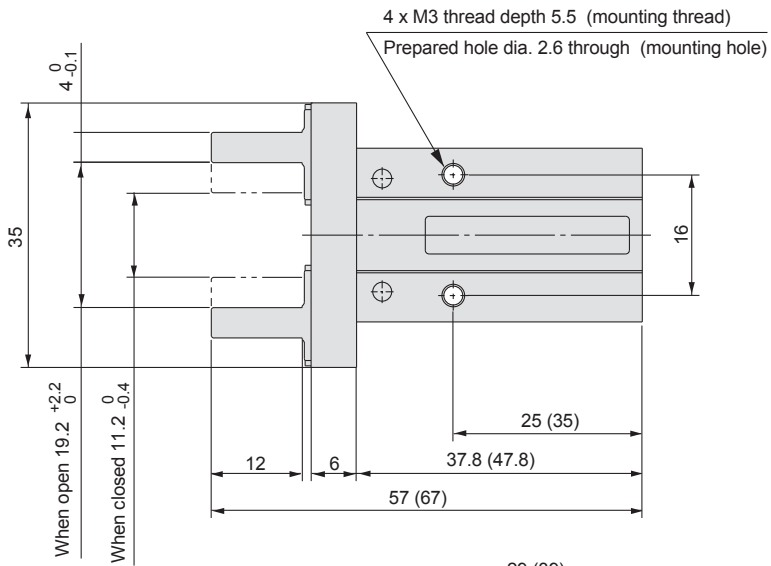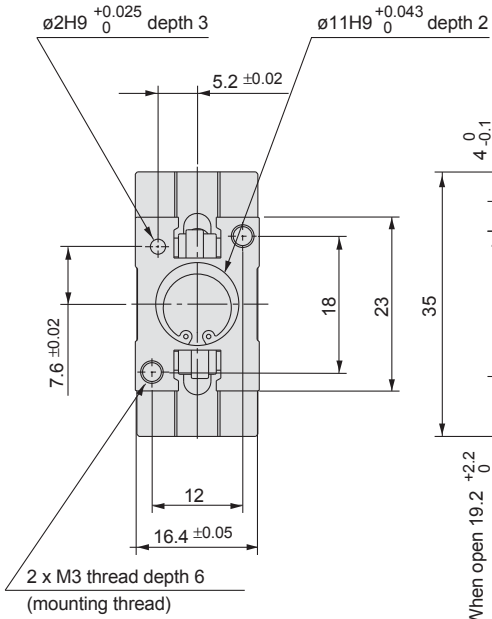

**Auto switch mounting groove dimensions**

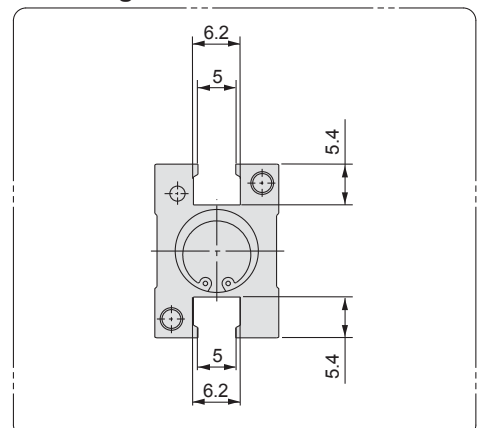

Noe) When using auto switches D-Y59, D-Y69 and D-Y7, through hole mounting is not possible.

**MHZ**

**MHQ**

**MHL2**

**MHR**

**MHK**

**MHS**

**MHC2**

**MHT2**

**MHY2**

**MHW2**

**MRHQ**

**Auto Switch**


# Series MHL2

## Dimensions



**MHL2-16**  
**Double acting/Single acting**  
**Basic type**

**Scale: 75%**


The values inside ( ) are dimensions for the single acting type.

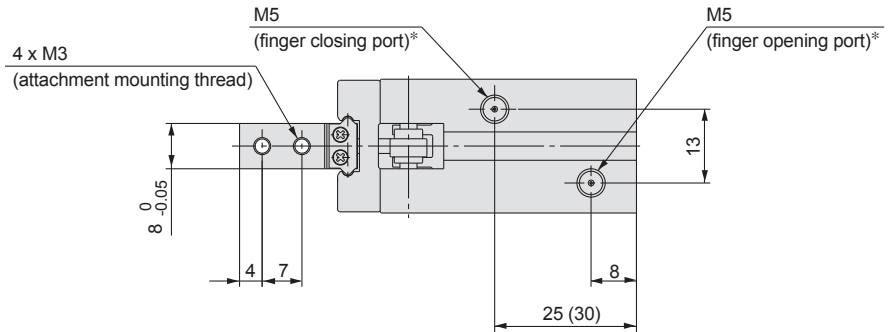

\* For single action, the port on one side is a breathing hole.

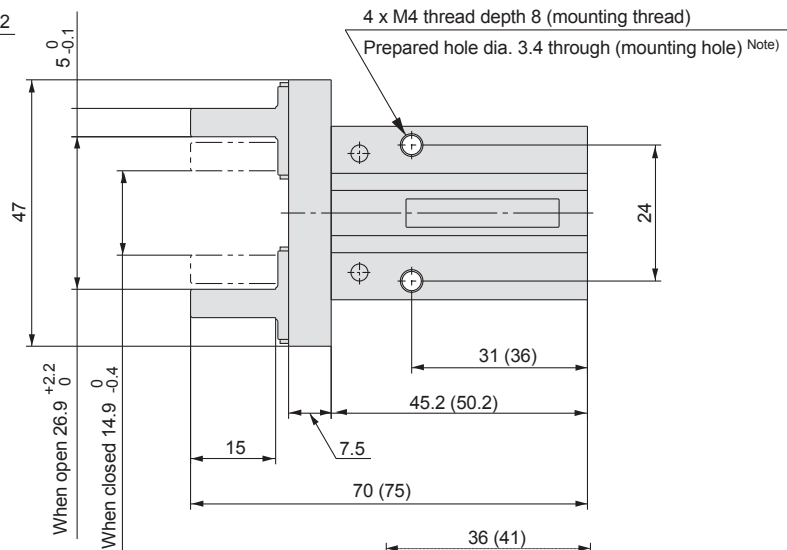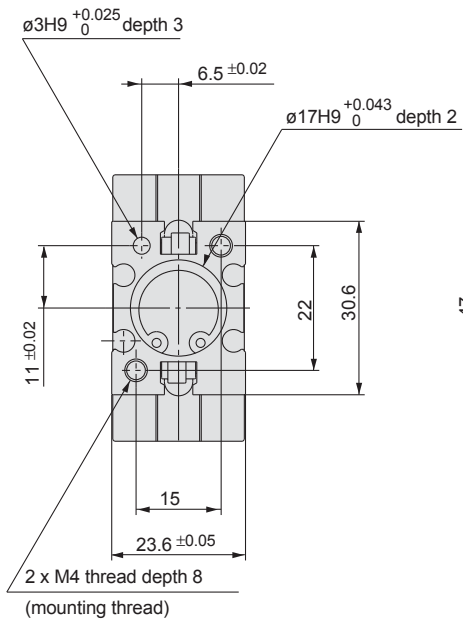

### Auto switch mounting groove dimensions

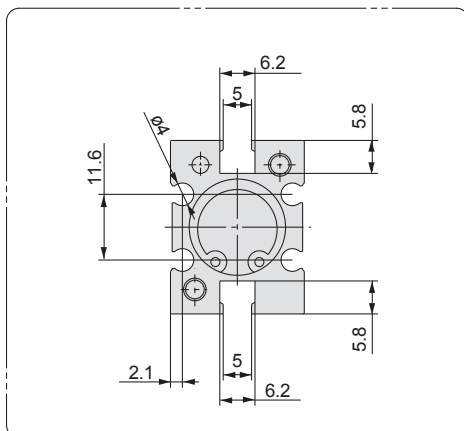


Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.


**MHZL2-20**  
**Double acting/Single acting**  
**Basic type**

**Scale: 60%**

The values inside ( ) are dimensions for the single acting type.

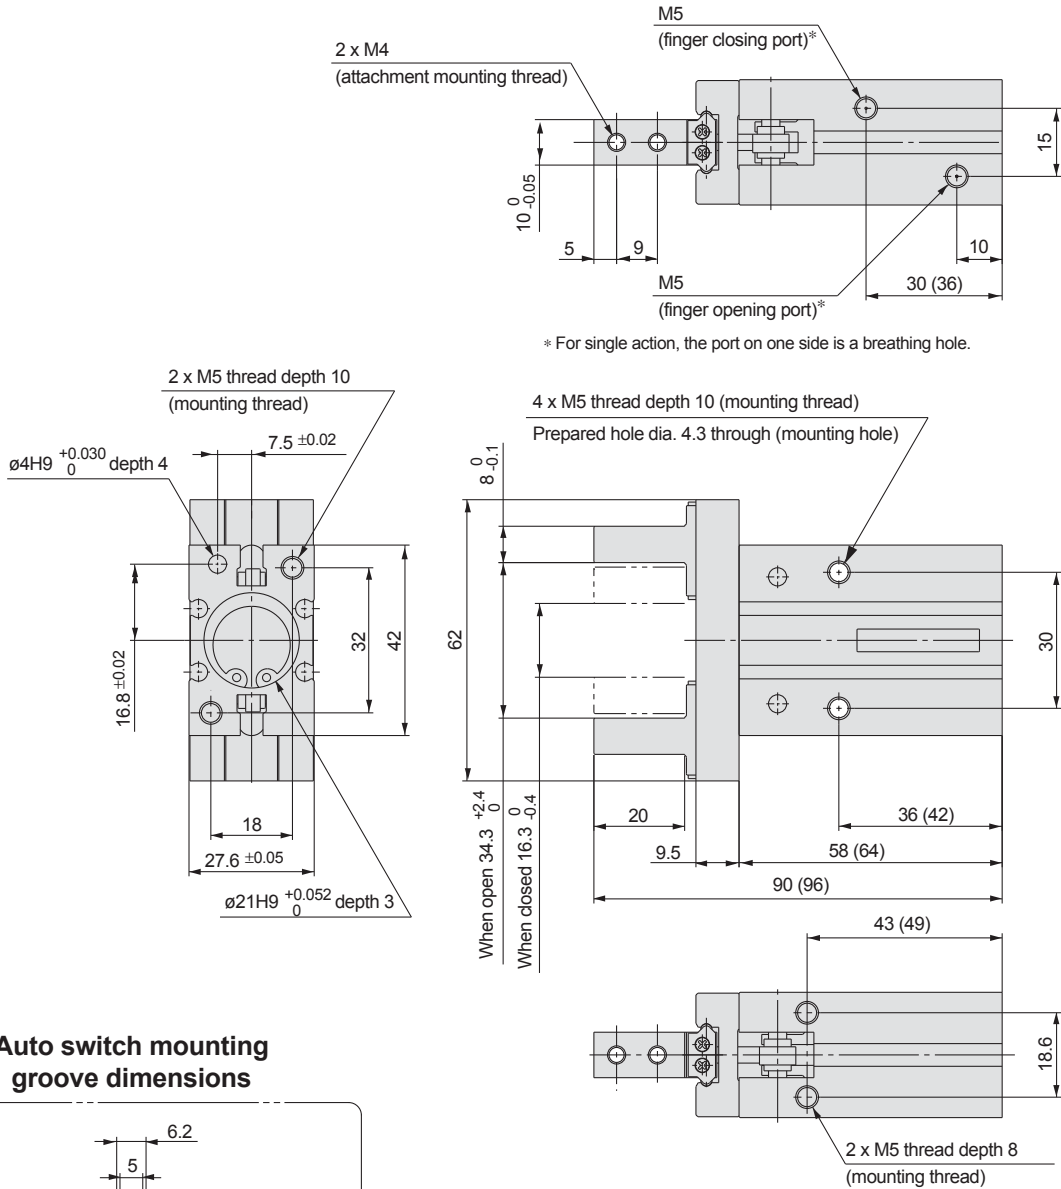

**Auto switch mounting groove dimensions**

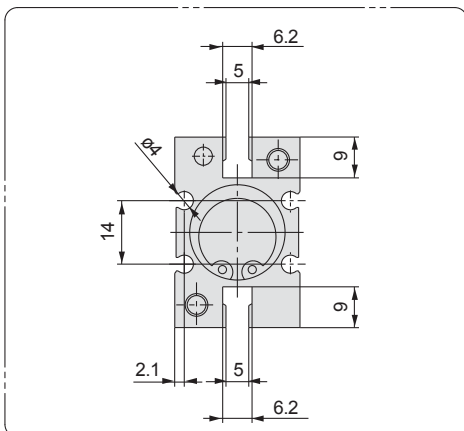

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

- MHZ
- MHQ
- MHL2
- MHR
- MHK
- MHS

- MHC2
- MHT2
- MHY2
- MHW2
- MRHQ
- Auto Switch


# Series MHZL2

## Dimensions




**MHZL2-25**  
**Double acting/Single acting**  
**Basic type**

**Scale: 50%**


The values inside ( ) are dimensions for the single acting type.

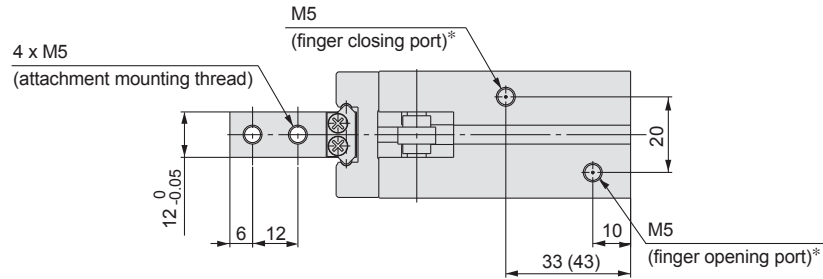

\* For single action, the port on one side is a breathing hole.

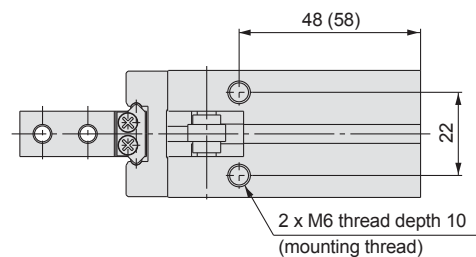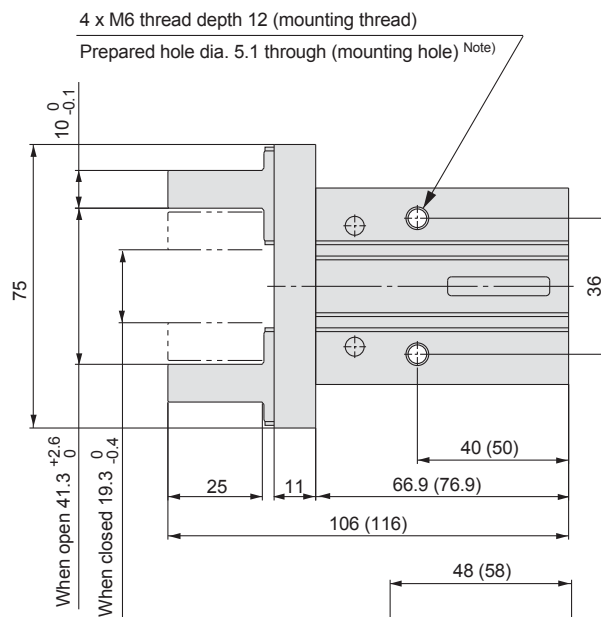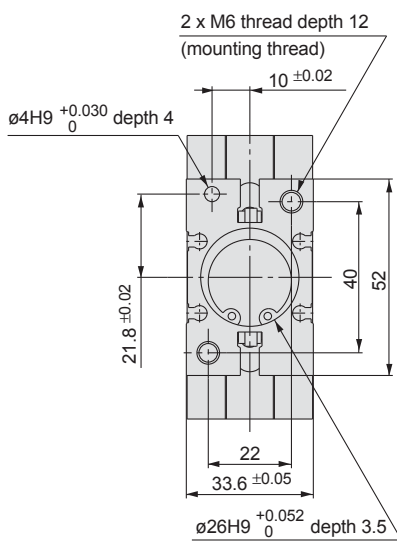


### Auto switch mounting groove dimensions

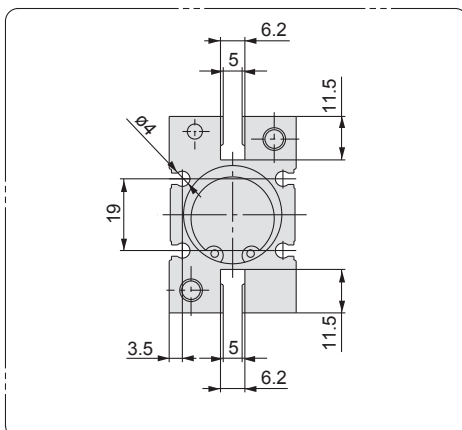

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

# Long Stroke/Series MHZL2 Finger Options

## Side Tapped Mounting [1]

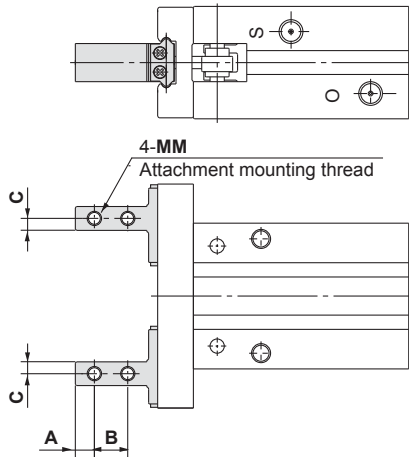


Unit: mm

Model	A	B	C	MM
MHZL2-10□1□	3	5.7	2	M2.5
MHZL2-16□1□	4	7	2.5	M3
MHZL2-20□1□	5	9	4	M4
MHZL2-25□1□	6	12	5	M5

\* Specifications and dimensions other than the above are the same as the basic type.

## Through Holes in Opening/Closing Direction [2]

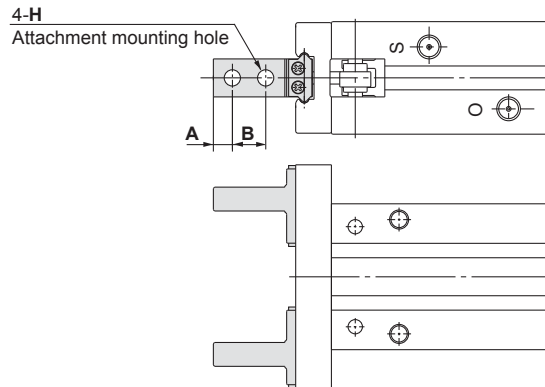


Unit: mm

Model	A	B	H
MHZL2-10□2□	3	5.7	2.9
MHZL2-16□2□	4	7	3.4
MHZL2-20□2□	5	9	4.5
MHZL2-25□2□	6	12	5.5

\* Specifications and dimensions other than the above are the same as the basic type.

## Flat Type Fingers [3]

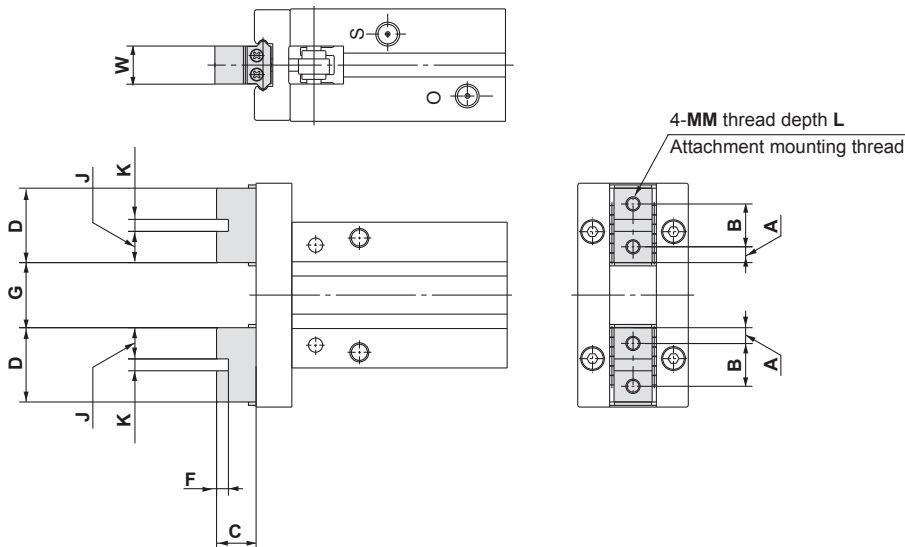

Unit: mm

Model	A	B	C	D	F	G		J	K	MM	L	W	Weight g	
						Open	Closed						Double acting	Single acting
MHZL2-10□3□	2.45	7	5.2	11.9	2	9.4 <sup>+2.2</sup> <sub>0</sub>	1.4 <sup>0</sup> <sub>-0.2</sub>	4.95	2H9 <sup>+0.025</sup> <sub>0</sub>	M2.5	5	5 <sup>0</sup> <sub>-0.05</sub>	60	70
MHZL2-16□3□	3.3	9	8.3	15.6	2.5	13.4 <sup>+2.2</sup> <sub>0</sub>	1.4 <sup>0</sup> <sub>-0.2</sub>	6.55	2.5H9 <sup>+0.025</sup> <sub>0</sub>	M3	6	8 <sup>0</sup> <sub>-0.05</sub>	135	145
MHZL2-20□3□	3.95	12	10.5	19.9	3	19.6 <sup>+2.4</sup> <sub>0</sub>	1.6 <sup>0</sup> <sub>-0.2</sub>	8.45	3H9 <sup>+0.025</sup> <sub>0</sub>	M4	8	10 <sup>0</sup> <sub>-0.05</sub>	270	290
MHZL2-25□3□	4.9	14	13.1	23.8	4	24 <sup>+2.6</sup> <sub>0</sub>	2 <sup>0</sup> <sub>-0.2</sub>	9.9	4H9 <sup>+0.030</sup> <sub>0</sub>	M5	10	12 <sup>0</sup> <sub>-0.05</sub>	460	505

\* Specifications and dimensions other than the above are the same as the basic type.

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto Switch


# Long Stroke/Series MHZL2

## Body Options: End Boss Type

### Applicable Models

Symbol	Piping port position	Type of Piping Port				Applicable model		
		MHZL2-10	MHZL2-16	MHZL2-20	MHZL2-25	Double acting	Single acting	
		M3		M5			Normally open	Normally closed
E	Side ported	M3		M5		●	●	●
W	Axial port	With $\varnothing 4$ One-touch fitting for coaxial tube				●	—	—
K		With $\varnothing 4$ One-touch fitting				—	●	●
M		M5 x 0.8				—	●	●

### Side Ported [E]

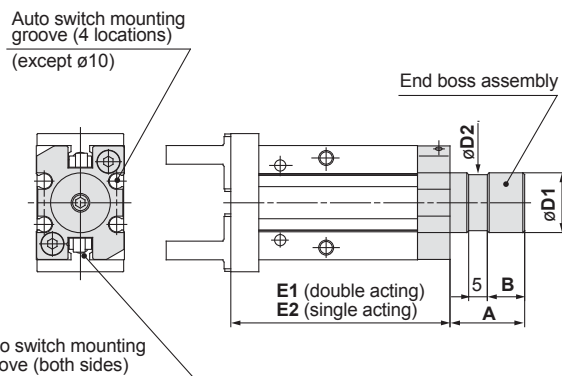


- \* Refer to the dimension table.
- \* When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	Kit no.	A	B	D1	D2	E1	E2
MHZL2-10□□	MHZ-A1010	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	52.8	62.8
MHZL2-16□□	MHZ-A1610	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	61.4	66.4
MHZL2-20□□	MHZ-A2010	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	75.7	81.7
MHZL2-25□□	MHZ-A2510	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	86.2	96.2

Other dimensions and specifications correspond to the standard type.

### Axial Port (One-touch Fitting for Coaxial Tubing) [W]

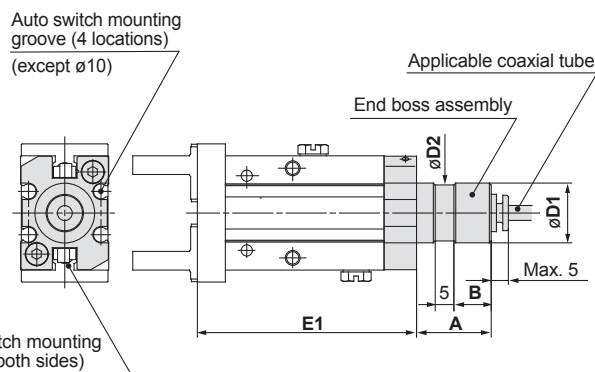

- \* Refer to the dimension table.
- \* When auto switches are used, side mounting with through holes is not possible.


Unit: mm

Model	A	B	D1	D2	E1
MHZL2-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	52.8
MHZL2-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	61.4
MHZL2-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	75.7
MHZL2-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	86.2

Other dimensions and specifications correspond to the standard type.

#### Applicable coaxial tubing


Reference symbol



Specification	Model	TW04B-20
Outside diameter		4mm
Max. operating pressure		0.6MPa
Min. bending radius		10mm
Operating temperature		-20 to 60°C
Material		Nylon 12


### Changing from Coaxial to Single Tubing

Changing to single tubing is possible by using a branch "Y" or branch tee fitting. In this case particularly, single tube fittings and tubing for  $\varnothing 3.2$  will be necessary.

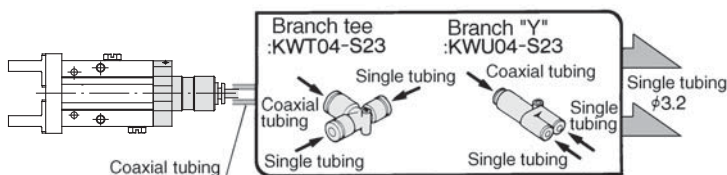


### Branch tee, Different diameter tee, Branch "Y", Male run tee

Refer to catalogue CAT.E004-A "Coaxial Air Tubing System" regarding coaxial tubing.

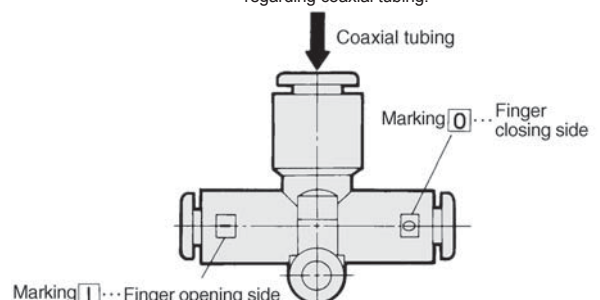



### Axial Port (with One-touch Fitting) [K]

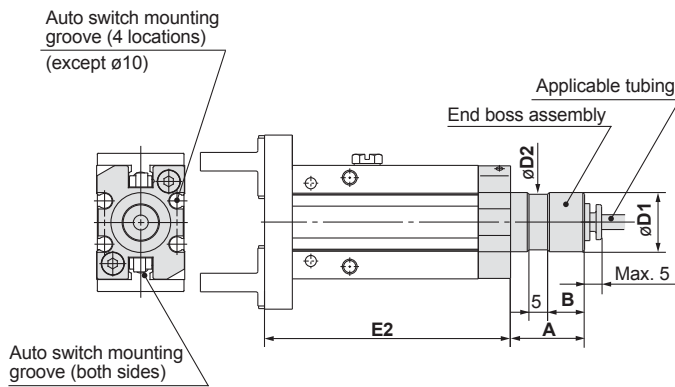

\* Refer to the dimension table.  
 \* When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E2
MHZL2-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	62.8
MHZL2-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	66.4
MHZL2-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	81.7
MHZL2-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	96.2


Other dimensions and specifications correspond to the standard type.

#### Applicable tubing

Description Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
	Specification	T0425	TS0425	TU0425
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Min. bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane

Refer to catalog CAT. 501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

### Axial Port (M5 Port) [M]

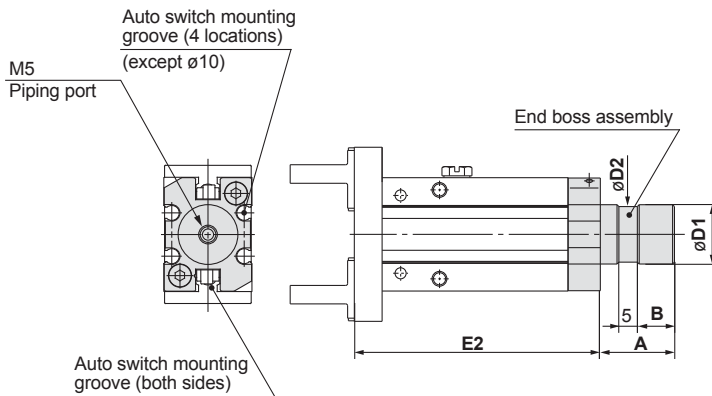

\* Refer to the dimension table.  
 \* When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E2
MHZL2-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	62.8
MHZL2-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	66.4
MHZL2-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	81.7
MHZL2-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	96.2

Other dimensions and specifications correspond to the standard type.

### Weights

Unit: g

Model	End boss type (symbol)				
	E		W	K	M
	Double acting	Single acting			
MHZL2□-10□□	70	80	70	80	80
MHZL2□-16□□	170	180	170	180	180
MHZL2□-20□□	310	330	310	330	330
MHZL2□-25□□	535	580	535	580	580

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto Switch

# With Dust Cover Series *MHZJ2*

## How to Order

**MHZJ2-16 D [ ] [ ] F9PV [ ]**

**Number of fingers**

2	2 fingers
---	-----------

**Bore size**

6	6mm
10	10mm
16	16mm
20	20mm
25	25mm

**Action**

D	Double acting
S	Single acting (normally open)
C	Single acting (normally closed)

**Body option**

\* ø6 is only applicable with basic type.

**Number of auto switches**

Nil	2 pcs.
S	1 pc.

**Auto switch type**

Nil	Without auto switch (built-in magnet)
-----	---------------------------------------

\* Select an applicable auto switch model from the table below.

**Dust cover type**

Nil	Chloroprene rubber (CR)
F	Fluoro rubber (FKM)
S	Silicon rubber (SI)

**Port options:**

- Nil:** Basic type
- E:** End boss type Side ported (double acting/single acting)
- W:** End boss type Axial port with ø4 One-touch fitting for coaxial tubing (double acting)
- K:** End boss type Axial port with ø4 One-touch fitting (single acting)
- M:** End boss type Axial M5 port (single acting)

These auto switches have been changed. Contact SMC or view [www.smcworld.com](http://www.smcworld.com).

F9N→M9N    F9NV→M9NV  
 F9P→M9P    F9PV→M9PV  
 F9B→M9B    F9BV→M9BV

\* Switch types D-Y5/6 and D-Y7 cannot be mounted when equipped with dust cover/MHZJ2.  
 \* Refer to pages 2.11-1 for detailed auto switch specifications.

### Applicable auto switches

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*				Applicable load	Applicable model										
					DC	AC	Electrical entry direction	0.5 (Nil)	3 (L)	5 (Z)	Flexible lead wire (-61)	ø6		ø10	ø16	ø20	ø25							
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	12V	—	F9NV	F9N	●	●	—	○	—	Relay, PLC	●	●	●	●	●				
				3 wire (PNP)				F9PV	F9P	●	●	—	○			●	●	●	●	●				
				2 wire				F9BV	F9B	●	●	—	○			●	●	●	●	●				
				3 wire (NPN)				F9NWV	F9NW	●	●	○	○			—	—	—	—	●	●			
				3 wire (PNP)				F9PWV	F9PW	●	●	○	○			—	—	—	—	●	●			
				2 wire				F9BWV	F9BW	●	●	○	○			—	—	—	—	●	●			
	Diagnostic indication (2 colour indicator)	—	—	—	—	—	—	—	F9BA	—	●	○	○	—	—	●	●	●	●	●				
	Water resistant (2 colour indicator)							—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

\* Lead wire length symbols: 0.5m ..... Nil (Example) F9N  
 3m ..... L (Example) F9NL  
 5m ..... Z (Example) F9NWZ

\* Auto switches marked with a "○" symbol are produced upon receipt of order.

Note 1) Use caution regarding hysteresis in the 2 colour indicator types. When using this type, refer to "Auto Switch Hysteresis" on page 2.1-52.

Note 2) When using a D-F8□ switch on sizes ø6 and ø10, mount it at a distance of 10mm or more from magnetic substances such as iron, etc.

Note 3) Add "-61" at the end of the part number for the flexible lead wire.

(Examples)

When ordering with an air gripper

MHZ □ 2-16D-F9NVS-61

Flexible lead wire ●

When ordering auto switches only

D-F9PL-61

Flexible lead wire ●

## Specifications




<b>Fluid</b>		Air
<b>Operating pressure</b>	<b>Double acting</b>	ø6: 0.15 to 0.7MPa ø10: 0.2 to 0.7MPa ø16 to ø25: 0.1 to 0.7MPa
	<b>Single acting</b>	<b>Normally open</b>
<b>Normally closed</b>		
<b>Ambient and fluid temperature</b>		-10 to 60°C
<b>Repeatability</b>		±0.01mm
<b>Maximum operating frequency</b>		180c.p.m.
<b>Lubrication</b>		Non-lube
<b>Action</b>		Double acting, Single acting
<b>Auto switch (option) <sup>Note)</sup></b>		Solid state switch (3 wire, 2 wire)

Note) Refer to pages 2.11-1 for details regarding auto switch specifications.


## Models

### Symbols:


#### Double acting type



#### Single acting type, normally open



#### Single acting type, normally closed



Action	Model	Bore size (mm)	Gripping force <sup>Note 1)</sup>		Opening/ Closing stroke (both sides) mm	Weight <sup>Note 2)</sup> g	
			Gripping force per finger Effective value N				
			External gripping force	Internal gripping force			
Double acting	MHZJ2- 6D	6	3.3	6.1	4	28	
	MHZJ2-10D	10	9.8	17	4	60	
	MHZJ2-16D	16	30	40	6	130	
	MHZJ2-20D	20	42	66	10	250	
	MHZJ2-25D	25	65	104	14	460	
Single acting	Normally open	MHZJ2- 6S	6	1.9	—	4	28
		MHZJ2-10S	10	6.3		4	60
		MHZJ2-16S	16	24		6	130
		MHZJ2-20S	20	28		10	255
		MHZJ2-25S	25	45		14	264
	Normally closed	MHZJ2- 6C	6	—	3.7	4	28
		MHZJ2-10C	10		12	4	60
		MHZJ2-16C	16		31	6	130
		MHZJ2-20C	20		56	10	255
		MHZJ2-25C	25		83	14	460

Note 1) Values based on pressure of 0.5MPa, gripping point L = 20mm, at center of stroke.

Note 2) Values excluding weight of auto switch.

## Options

### ● Body options/End boss type

Symbol	Piping port position	Type of piping port				Applicable model	
		MHZJ2-10	MHZJ2-16	MHZJ2-20	MHZJ2-25	Double acting	Single acting
Nil	Basic type	M3 x 0.5	M5 x 0.8			●	●
E	Axial port	M3 x 0.5	M5 x 0.8			●	●
W	Axial port	With ø4 One-touch fitting for coaxial tube				●	—
K	Axial port	With ø4 One-touch fitting				—	●
M	Axial port	M5 x 0.8				—	●

\* For detailed body option specifications, refer to option specifications on pages 2.1-50 and 2.1-51.

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto Switch

# Параллельный захват с пылезащитным колпаком

## MHZJ2

∅10~25

### Технические характеристики

Среда	Очищенный сжатый воздух с содержанием масла или без него	
Рабочий диапазон (МПа)	Двустороннего действия	0.2 ~ 0.7
	Одностороннего действия	0.35 ~ 0.7
Диапазон рабочих температур (°C)	-10 ~ +60	
Точность позиционирования (мм)	±0.01	
Макс. частота срабатывания (мин <sup>-1</sup> )	180	
Тип	Одностороннего, двустороннего действия	




### Номер для заказа


Диам. поршня (мм)	Двустороннего действия	Одностороннего действия	
		Раскрыт без Поддачи давления	Закрыт без Поддачи давления
10	MHZJ2-10D	MHZJ2-10S	MHZJ2-10C
16	MHZJ2-16D	MHZJ2-16S	MHZJ2-16C
20	MHZJ2-20D	MHZJ2-20S	MHZJ2-20C
25	MHZJ2-25D	MHZJ2-25S	MHZJ2-25C

### Условное обозначение


Двустороннего действия



Односторон. действ., раскрыт без подачи давления



Односторон. действ., закрыт без подачи давления



### Исполнение

Тип	Модель	Диам. поршня (мм)	Удерживающее усилие при 0.5 МПа (Н)		Длина хода на раскрытие, (мм)	Вес, (г)	
			наруж. захват	внутр. захват			
Двустороннего действия	MHZJ2-10D	10	9.8	17	4	60	
	MHZJ2-16D	16	30	40	6	130	
	MHZJ2-20D	20	42	66	10	250	
	MHZJ2-25D	25	65	104	14	460	
Одностороннего действия	Раскрыт без подачи давления	MHZJ2-10S	10	6.3		4	60
		MHZJ2-16S	16	24		6	130
		MHZJ2-20S	20	28		10	255
		MHZJ2-25S	25	45		14	465
	Закрыт без подачи давления	MHZJ2-10C	10		12	4	60
		MHZJ2-16C	16		31	6	130
		MHZJ2-20C	20		56	10	255
		MHZJ2-25C	25		83	14	460

\* Усилие приводится для средней точки на одном пальце

Более точные значения см. на диаграммах


\*\* Вес указан без датчиков положения

Примечание: диаграммы эффективного удерживающего усилия – см. серию MHZ2


# Series MHZJ2

## Construction/MHZJ2-6□


### Double acting/with fingers open

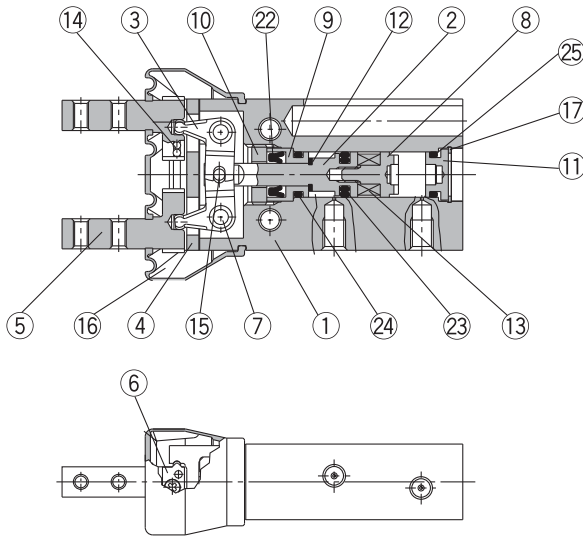


### Single acting/normally open

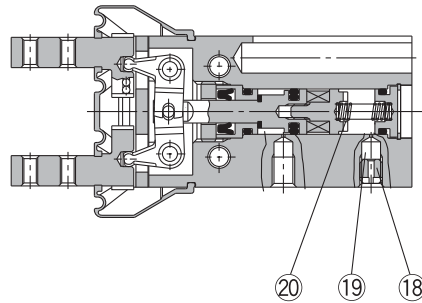

### Single acting/normally closed

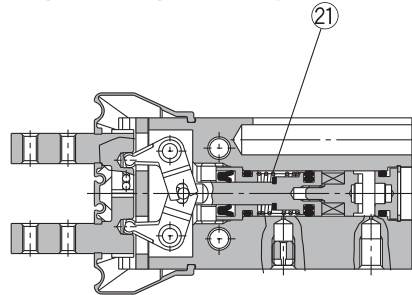

### Double acting/with fingers closed

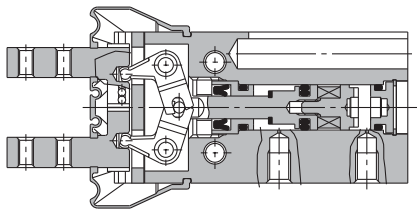

### Parts list

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	Stainless steel	
3	Lever	Stainless steel	Heat treated
4	Guide	Stainless steel	Heat treated
5	Finger	Stainless steel	Heat treated
6	Roller stopper	Stainless steel	
7	Lever shaft	Stainless steel	Nitrided
8	Magnet holder	Stainless steel	
9	Holder	Brass	Electroless nickel plated
10	Holder lock	Stainless steel	
11	Cap	Aluminum alloy	Clear anodized
12	Bumper	Urethane rubber	
13	Magnet	Rare earth magnet	Nickel plated
14	Steel balls	High carbon chromium bearing steel	
15	Needle roller	High carbon chromium bearing steel	
16	Dust cover	CR	Chloroprene rubber
		FKM	Fluoro rubber
		Si	Silicon rubber
17	C type snap ring	Carbon steel	Nickel plated
18	Exhaust plug	Brass	Electroless nickel plated
19	Exhaust filter	Polyvinyl formal	
20	N.O. spring	Stainless steel spring wire	
21	N.C. spring	Stainless steel spring wire	
22	Rod seal	NBR	
23	Piston seal	NBR	
24	Gasket	NBR	
25	Gasket	NBR	

### Replacement parts: Seal kits

Seal kit no.	Description
MHZJ6-PS	Kit includes items 22, 23, 24 and 25 from the table on the left.

\* Seal kits consist of items 22, 23, 24 and 25 contained in one kit, and can be ordered using the seal kit number.


Note) Contact SMC when replacing seals.

### Replacement parts: Dust covers


Material	Part no.
CR	MHZJ2-J6
FKM	MHZJ2-J6F
Si	MHZJ2-J6S

**Construction/MHZJ2-10□ to 25□**


**Double acting/with fingers open**

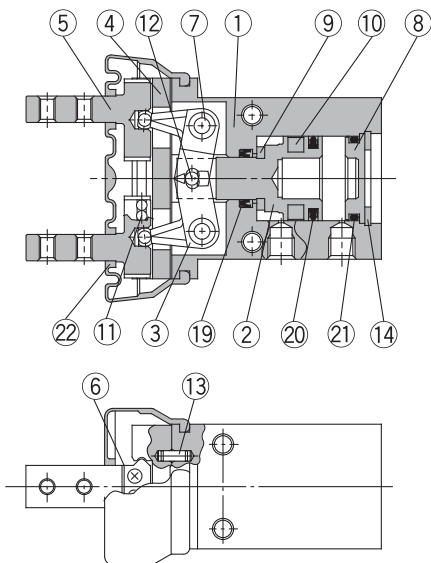


**Single acting/normally open**

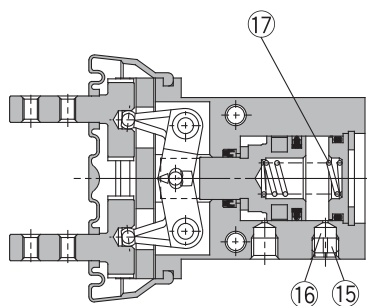

**Single acting/normally closed**

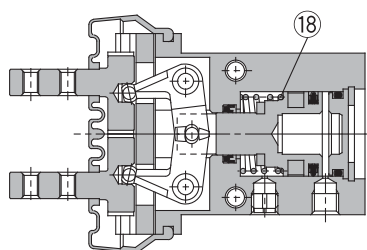

**Double acting/with fingers closed**

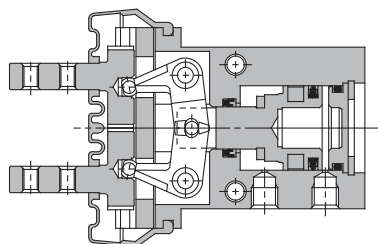

**Parts list**

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	ø10, ø16: Stainless steel ø20, ø25: Aluminum alloy	ø20, ø25: Hard anodized
3	Lever	Stainless steel	Heat treated
4	Guide	Stainless steel	Heat treated
5	Finger	Stainless steel	Heat treated
6	Roller stopper	Stainless steel	
7	Lever shaft	Stainless steel	Nitrided
8	Cap	Aluminum alloy	Hard anodized
9	Bumper	Urethane rubber	
10	Rubber magnet	Synthetic rubber	
11	Steel balls	High carbon chromium bearing steel	
12	Needle roller	High carbon chromium bearing steel	
13	Parallel pin	Stainless steel	
14	C type snap ring	Carbon steel	Nickel plated
15	Exhaust plug A	Brass	Electroless nickel plated
16	Exhaust filter A	Polyvinyl formal	
17	N.O. spring	Stainless steel spring wire	
18	N.C. spring	Stainless steel spring wire	
19	Rod seal	NBR	
20	Piston seal	NBR	
21	Gasket	NBR	
22	Dust cover	CR	Chloroprene rubber
		FKM	Fluoro rubber
		Si	Silicon rubber

**Replacement parts: Seal kits**

Seal kit no.				Description
MHZJ2-10□	MHZJ2-16□	MHZJ2-20□	MHZJ2-25□	Kits include <sup>Note 2)</sup> items 19, 20 and 21 from the table on the left
MHZJ10-PS	MHZJ16-PS	MHZJ20-PS	MHZJ25-PS	

Note 2) Seal kits consist of items 19, 20 and 21 in one kit, and can be ordered using the seal kit number for each cylinder bore size.

**Replacement parts: Dust covers**

Material	Part no.			
	MHZJ2-10□	MHZJ2-16□	MHZJ2-20□	MHZJ2-25□
CR	MHZJ2-J10	MHZJ2-J16	MHZJ2-J20	MHZJ2-J25
FKM	MHZJ2-J10F	MHZJ2-J16F	MHZJ2-J20F	MHZJ2-J25F
Si	MHZJ2-J10S	MHZJ2-J16S	MHZJ2-J20S	MHZJ2-J25S

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ


Auto Switch

# Series MHZJ2


## Dimensions

**MHZJ2-6□**  
**Double acting/Single acting**  
**Basic type**


**Scale: 100%**

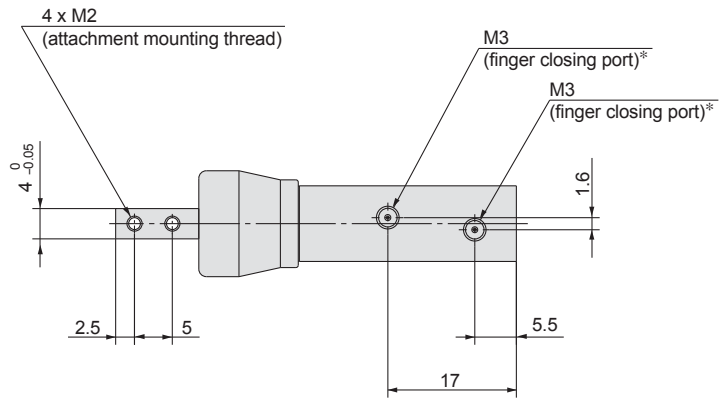

\* For single action, the port on one side is a breathing hole.

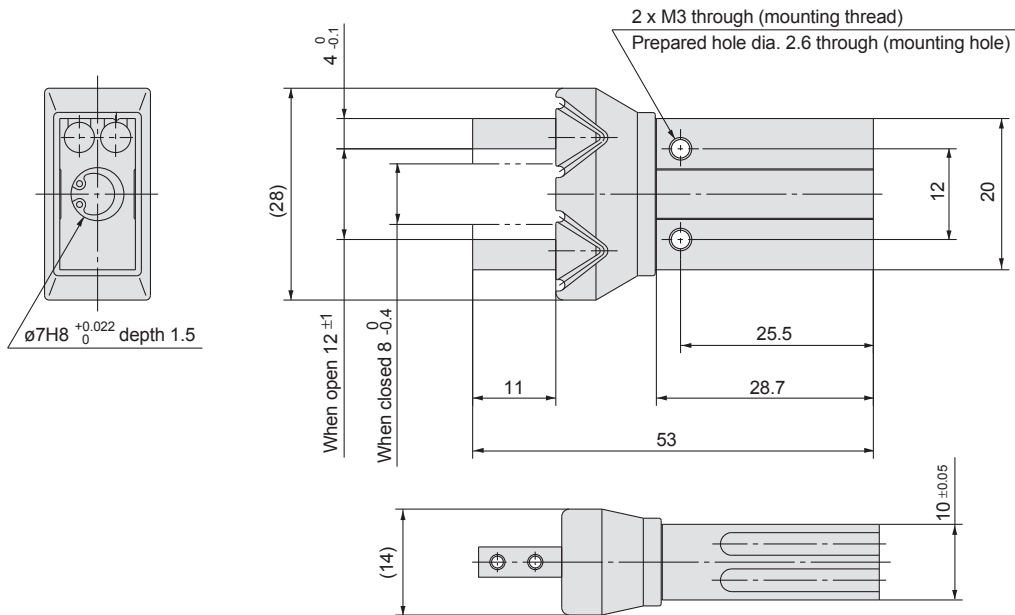




### Auto switch mounting groove dimensions

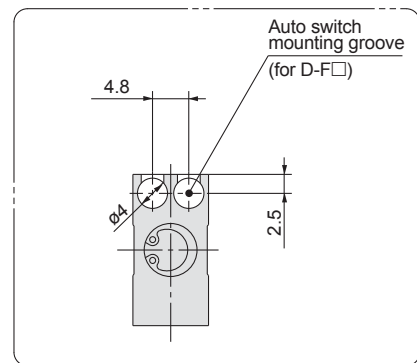


**MHZJ2-10** □

**Double acting/Single acting  
Basic type**


Scale: 90%

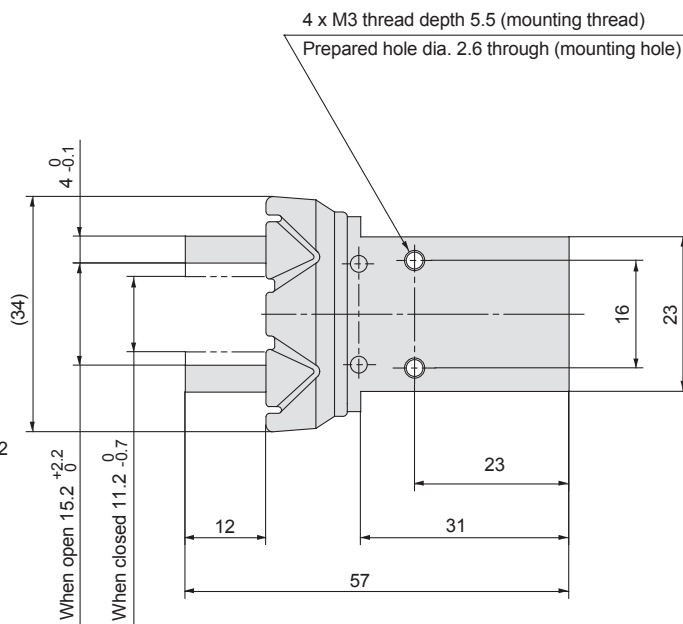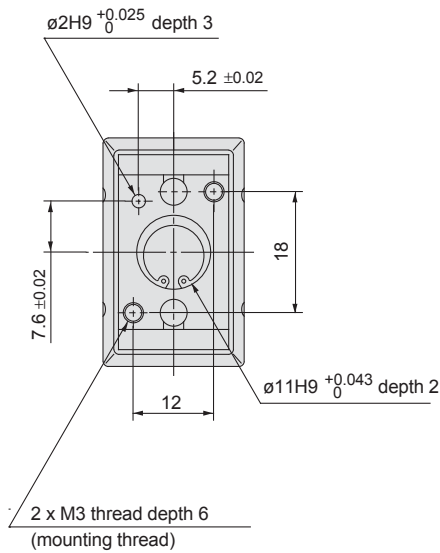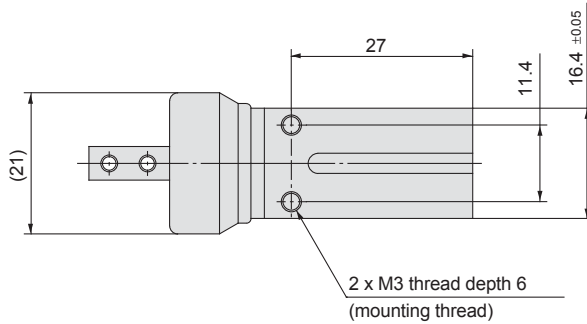

**Auto switch mounting  
groove dimensions**

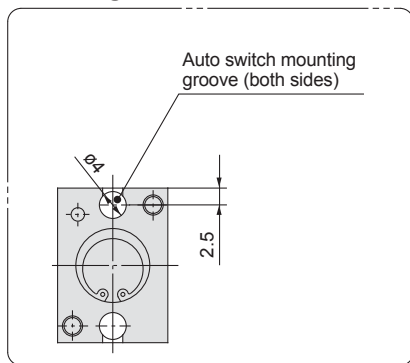

Note) When using auto switches, through hole mounting is not possible.

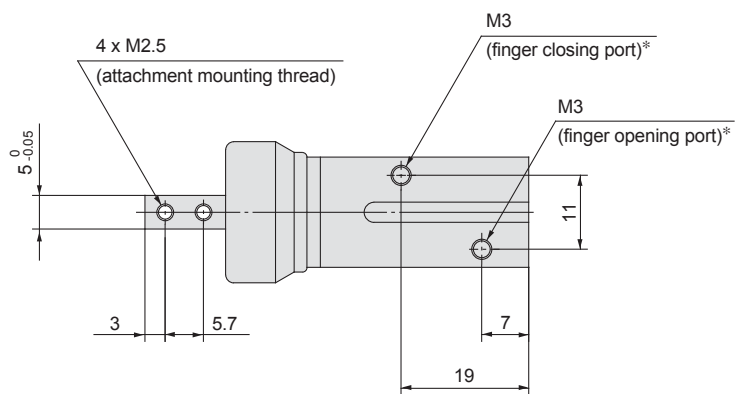

\* For single action, the port on one side is a breathing hole.

- MHZ
- MHQ
- MHL2
- MHR
- MHK
- MHS

- MHC2
- MHT2
- MHY2
- MHW2
- MRHQ
- Auto Switch




# Series MHZJ2

## Dimensions


MHZJ2-16□

Double acting/Single acting  
Basic type


Scale: 60%

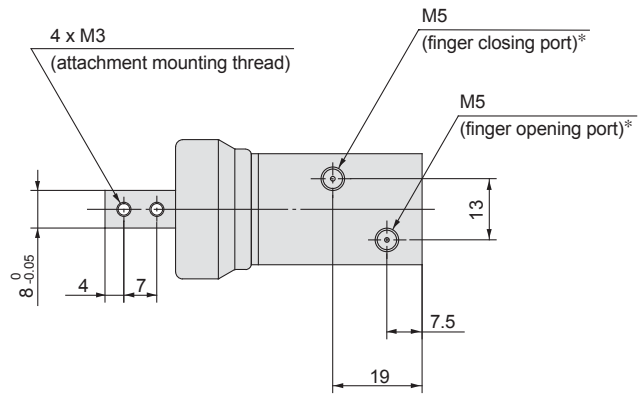

\* For single action, the port on one side is a breathing hole.

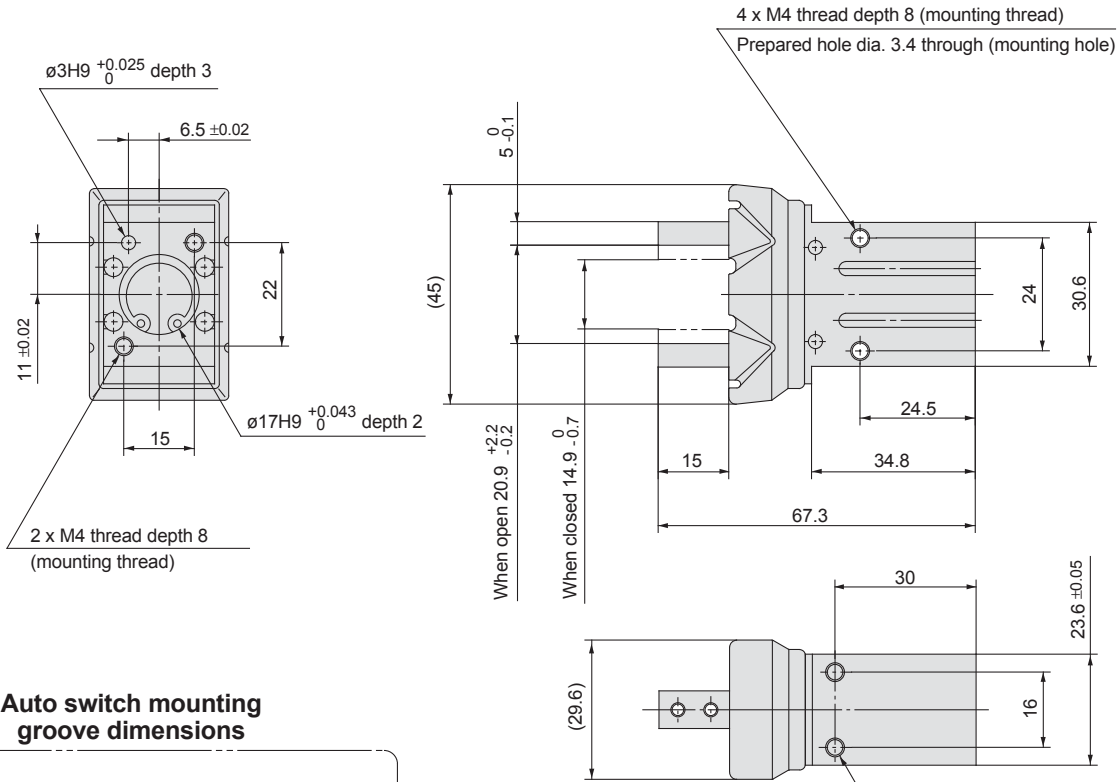


### Auto switch mounting groove dimensions

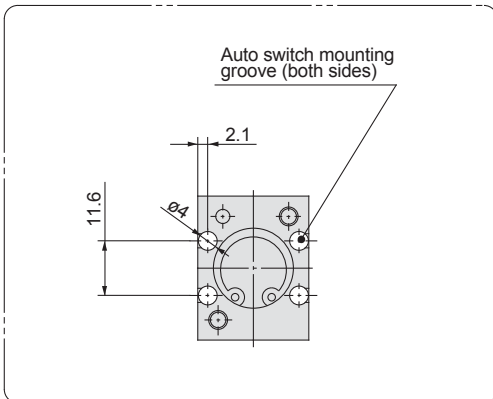




**MHZJ2-20**  
**Double acting/Single acting**  
**Basic type**

Scale: 60%

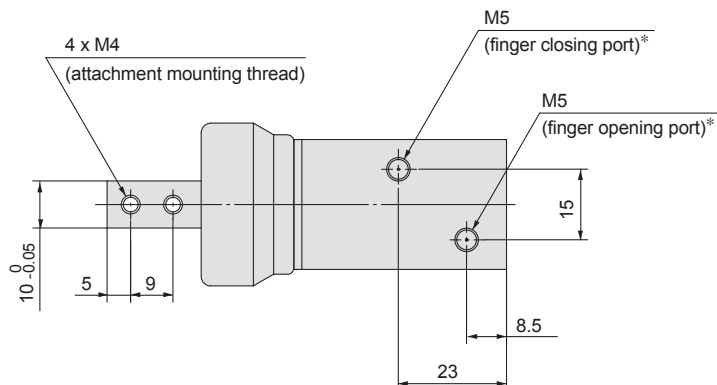


\* For single action, the port on one side is a breathing hole.

4 x M5 thread depth 10 (mounting thread)  
 Prepared hole dia. 4.3 through (mounting hole)

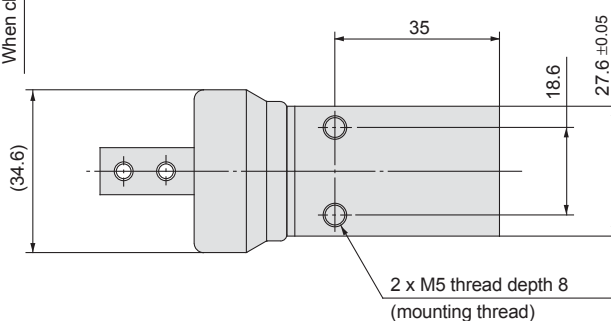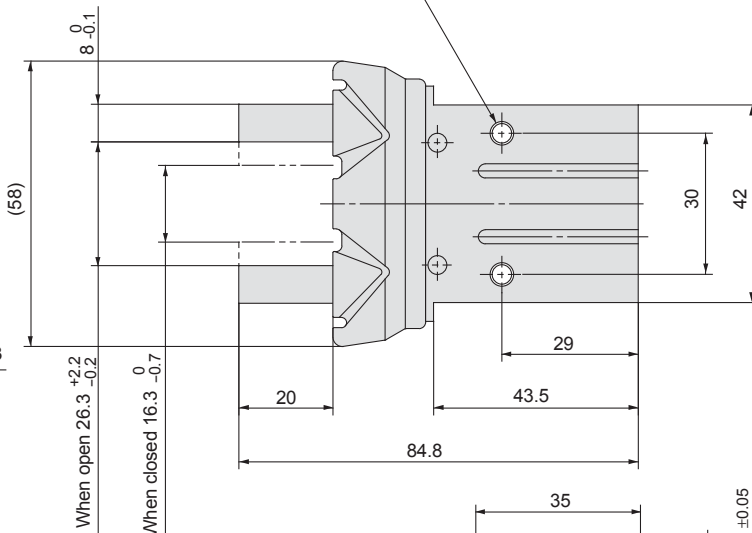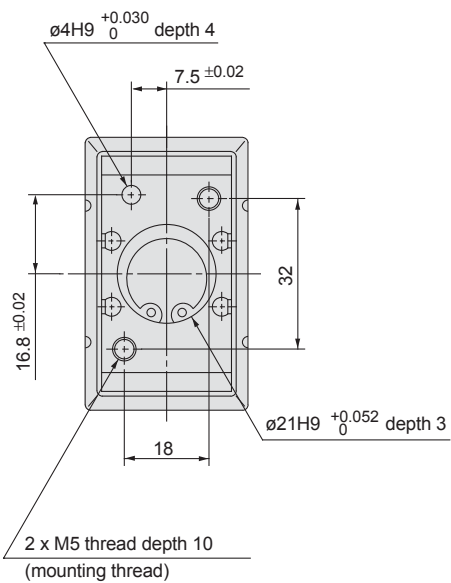

**Auto switch mounting groove dimensions**

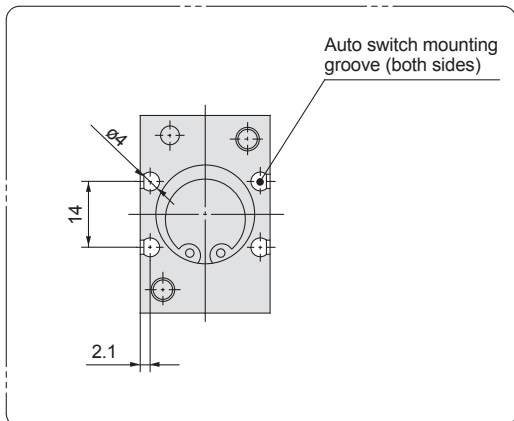

- MHZ
- MHQ
- MHL2
- MHR
- MHK
- MHS

- MHC2
- MHT2
- MHY2
- MHW2
- MRHQ
- Auto Switch


# Series MHZJ2

## Dimensions



### MHZJ2-25□

### Double acting/Single acting Basic type



Scale: 50%

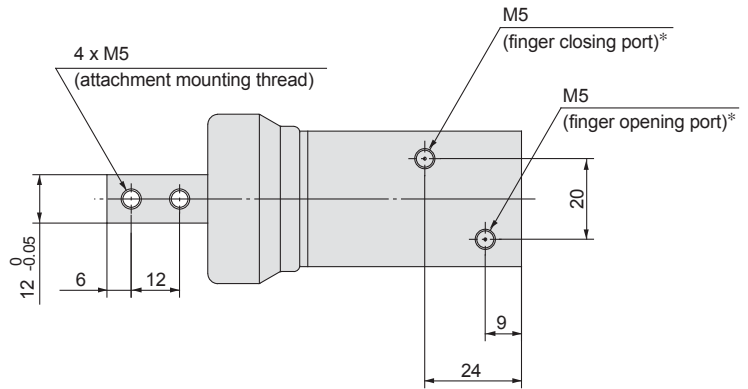

\* For single action, the port on one side is a breathing hole.

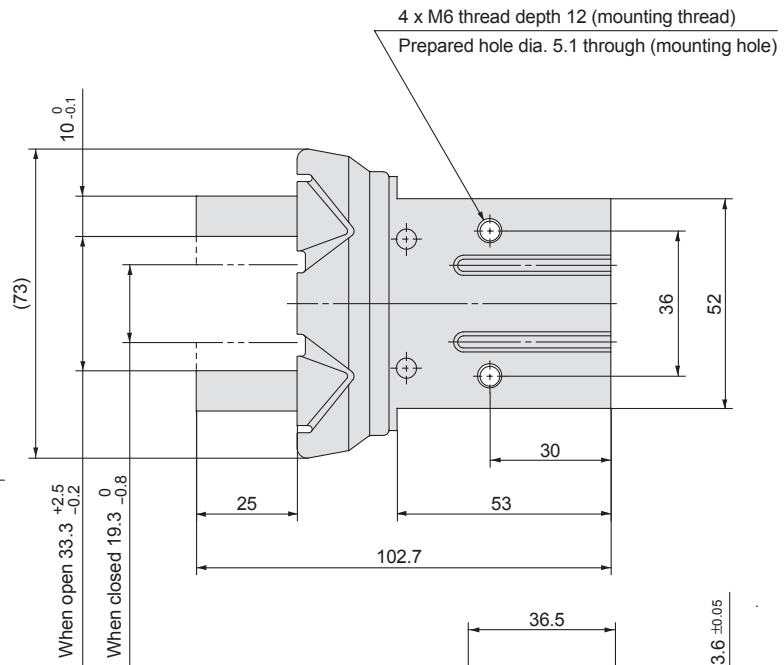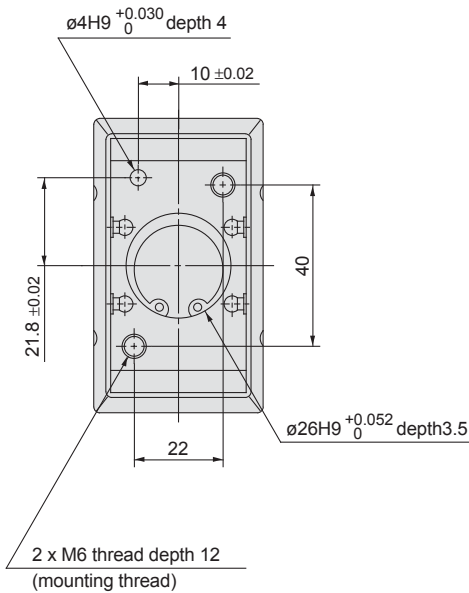

### Auto switch mounting groove dimensions

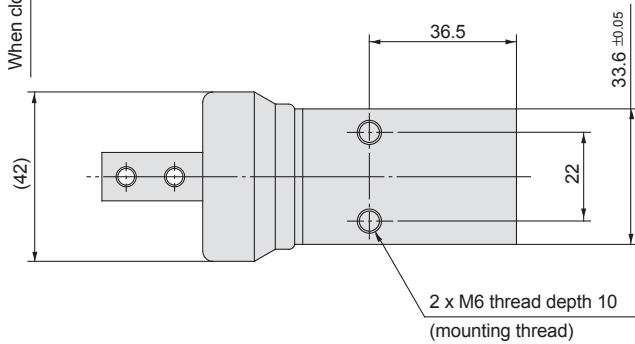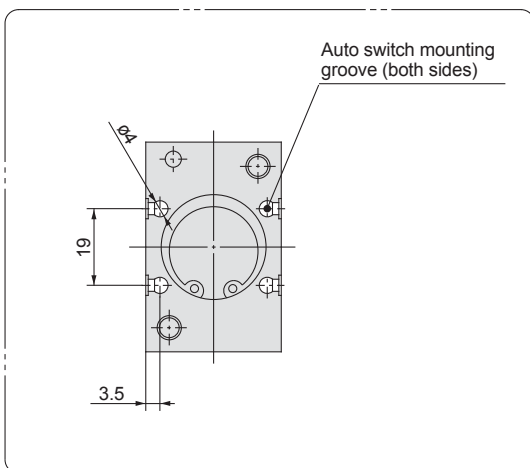


# With Dust Cover/Series MHZJ2

## Body Options: End Boss Type

### Applicable Models

Symbol	Piping port position	Type of piping port				Applicable model		
		MHZJ2-10	MHZJ2-16	MHZJ2-20	MHZJ2-25	Double acting	Single acting	
							Normally open	Normally closed
E	Side ported	M3	M5		●	●	●	
W	Axial port	With $\phi 4$ One-touch fitting for coaxial tube				●	—	—
K		With $\phi 4$ One-touch fitting				—	●	●
M		M5 x 0.8				—	●	●

### Side Ported [E]

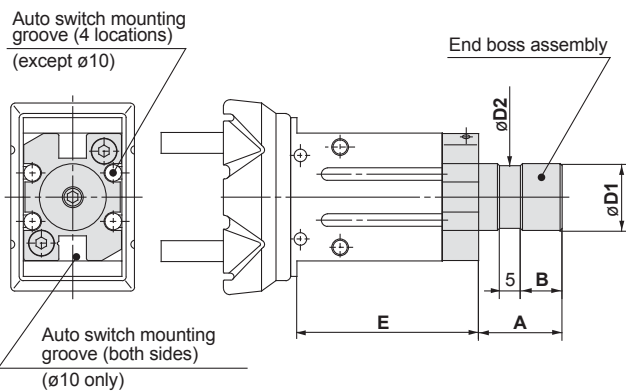


- \* Refer to the dimension table.
- \* When auto switches are used on  $\phi 10$ , side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E
MHZJ2-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	40
MHZJ2-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	43.5
MHZJ2-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	51.7
MHZJ2-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	61.3

Other dimensions and specifications correspond to the standard type.

### Axial Port (One-touch Fitting for Coaxial Tubing) [W]

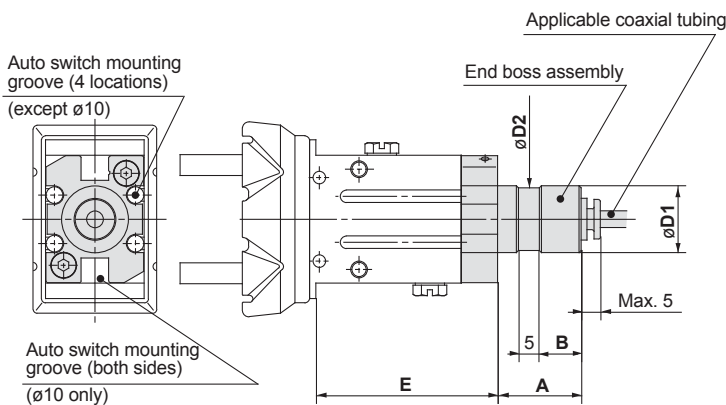

- \* Refer to the dimension table.
- \* When auto switches are used on  $\phi 10$ , side mounting with through holes is not possible.


Unit: mm

Model	A	B	D1	D2	E
MHZJ2-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	40
MHZJ2-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	43.5
MHZJ2-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	51.7
MHZJ2-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	61.3

Other dimensions and specifications correspond to the standard type.

#### Applicable coaxial tubing


Reference symbol



Specification	Model	TW04B-20
Outside diameter		4mm
Max. operating pressure		0.6MPa
Min. bending radius		10mm
Operating temperature		-20 to 60°C
Material		Nylon 12


### Changing from Coaxial to Single Tubing

Changing to single tubing is possible by using a branch "Y" or branch tee fitting. In this case particularly, single tube fittings and tubing for  $\phi 3.2$  will be necessary.

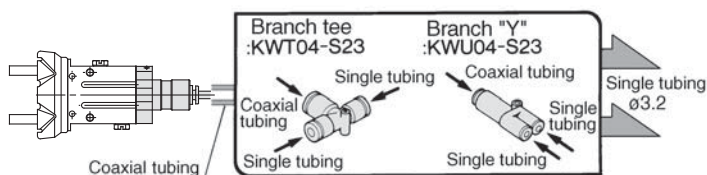

### Branch tee, Different diameter tee, Branch "Y", Male run tee

Refer to catalogue CAT.E004-A "Coaxial Air Tubing System" regarding coaxial tubing.

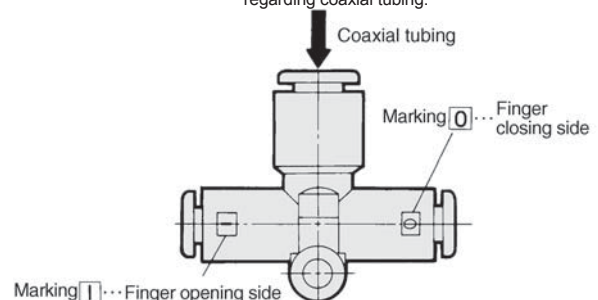


# With Dust Cover/Series MHZJ2

## Body Options: End Boss Type

### Axial Port (with One-touch Fitting) [K]

Unit: mm

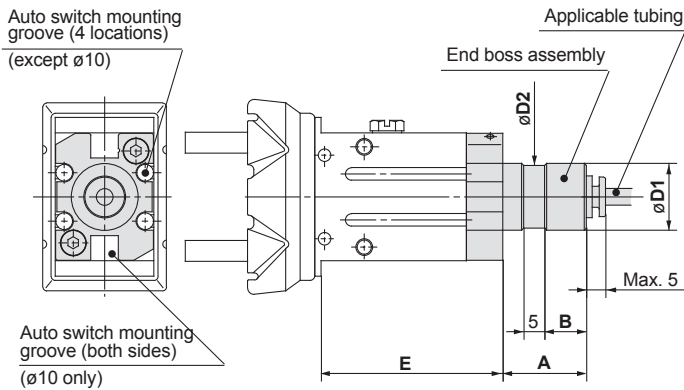

- \* Refer to the dimension table.
- \* When auto switches are used on  $\phi 10$ , side mounting with through holes is not possible.

Model	A	B	D1	D2	E
MHZJ2-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	40
MHZJ2-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	43.5
MHZJ2-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	51.7
MHZJ2-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	61.3

Other dimensions and specifications correspond to the standard type.


### Applicable tubing

Description/ Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
	T0425	TS0425	TU0425	TCU0425B-1
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Min. bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane

Refer to catalog CAT. E501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

### Axial Port (M5 Port) [M]

Unit: mm

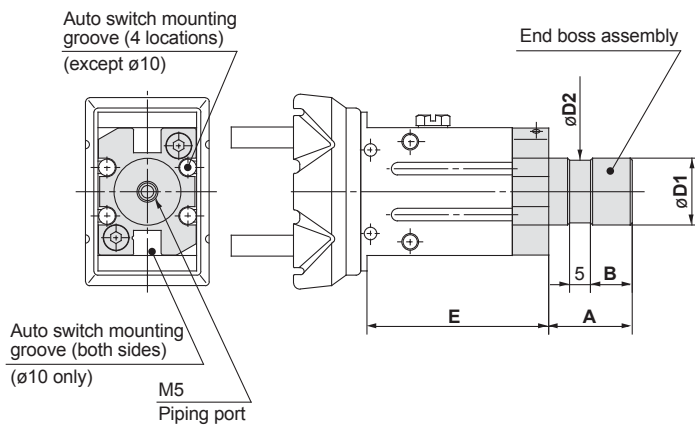

- \* Refer to the dimension table.
- \* When auto switches are used on  $\phi 10$ , side mounting with through holes is not possible.

Model	A	B	D1	D2	E
MHZJ2-10□□	15	7	12f8 <sup>-0.016</sup> <sub>-0.043</sub>	11	40
MHZJ2-16□□	20	10	16f8 <sup>-0.016</sup> <sub>-0.043</sub>	15	43.5
MHZJ2-20□□	22	12	20f8 <sup>-0.020</sup> <sub>-0.053</sub>	19	51.7
MHZJ2-25□□	25	15	25f8 <sup>-0.020</sup> <sub>-0.053</sub>	24	61.3

Other dimensions and specifications correspond to the standard type.


### Weights

Unit: g

Model	End boss type (symbol)			
	E	W	K	M
MHZJ2-10□□	70	70	70	70
MHZJ2-16□□	165	165	165	165
MHZJ2-20□□	290	290	290	290
MHZJ2-25□□	525	525	525	525

## Auto Switch Hysteresis

Auto switches have hysteresis similar to micro switches. The adjustment of switch positions should be performed using the table below as a guide.

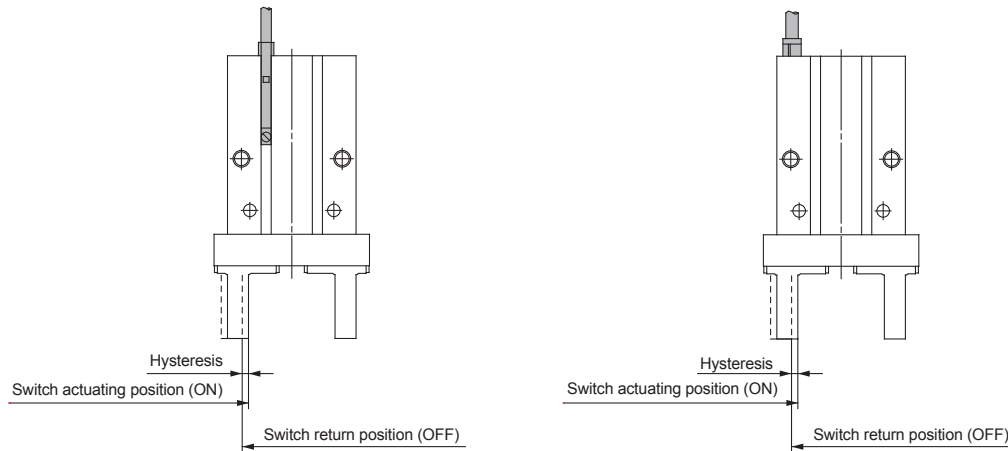


### Hysteresis

	D-Y59A, B D-Y69A, B D-Y7P(V)	D-F9□(V) D-F8□	D-Y7□W(V)		D-F9□W(V)		D-F9BAL					
			Red light ON	Green light ON	Red light ON	Green light ON	Red light ON	Green light ON				
MHZ2-6□	No setting	0.5	No setting		No setting		No setting					
MHZ2-10□, MHZL2-10□	0.4	No setting										
MHZ2-16□, MHZL2-16□	0.4	0.5										
MHZ2-20□, MHZL2-20□	0.4	0.5							0.5	1	0.5	1
MHZ2-25□, MHZL2-25□	0.4	0.5							0.5	1	0.5	1
MHZ2-32□	0.4	0.5							0.5	1	0.5	1
MHZ2-40□	0.4	0.5	0.5	1	0.5	1	No setting					
MHZJ2-6□	No setting	0.5	No setting		No setting				0.4	0.8		
MHZJ2-10□		0.5							0.4	0.8		
MHZJ2-16□		0.5							0.4	0.8		
MHZJ2-20□		0.5			0.5	1			0.4	0.8		
MHZJ2-25□		0.5			0.5	1			0.4	0.8		

MHZ  
MHQ  
MHL2  
MHR  
MHK  
MHS

## Auto Switch Mounting

When mounting auto switches, insert them into one of the air gripper's switch mounting grooves from the direction shown in the figure below. After setting in the desired mounting position, tighten the switch mounting screw (included) using a flat head watchmakers screw driver.

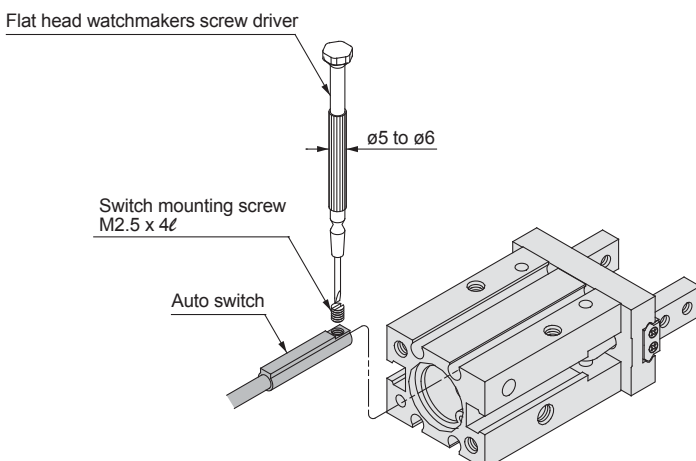

Note) When tightening the auto switch mounting screw, use a watchmakers screw driver with a handle diameter of about 5 to 6mm. The tightening torque should be about 0.05 to 0.1N·m. As a rule, it should be turned about 90° beyond the point at which tightening can be felt.

MHC2  
MHT2  
MHY2  
MHW2  
MRHQ  
Auto Switch

# Series MHZ

## Auto Switch Protrusion from the Body End Surface

- The amount of auto switch protrusion from the body's end surface is as shown in the table below.
- Use this as a guide when mounting, etc.
- With D-F8□, there is no auto switch protrusion from the body's end surface.

### Standard body

Lead wire type	In-line					Perpendicular						
	Illustration		Illustration		Illustration		Illustration		Illustration			
Model	D-Y59□ D-Y7P	D-Y7□W	D-F9□	D-F9□W	D-F9BAL	D-Y69□ D-Y7PV	D-Y7□WV	D-F9□V	D-F9□WV			
<b>Standard</b>	MHZ2-6□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	11		
		Closed								13		
	MHZ2-10□	Open	1	No setting	No setting	No setting	No setting	No setting	No setting	No setting	6.5	
		Closed	7.5									
	MHZ2-16□	Open	—	No setting	No setting	No setting	No setting	No setting	No setting	No setting	1	
		Closed	6								4	2
	MHZ2-20□	Open	—	—	—	—	No setting	No setting	No setting	No setting	—	
Closed		4	4	2	2	3					3	
MHZ2-25□	Open	—	—	—	—	No setting	No setting	No setting	No setting	—		
	Closed	1	1	—	—					—	—	
MHZ2-32□	Open	—	—	—	—	No setting	No setting	No setting	No setting	—		
	Closed	3	3	—	—					2	2	
MHZ2-40□	Open	—	—	—	—	No setting	No setting	No setting	No setting	—		
	Closed	2	2	—	—					1	1	
<b>With dust cover</b>	MHZJ2-6□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	16		
		Closed								11	18	9
	MHZJ2-10□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	5	
		Closed									7	16
	MHZJ2-16□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	2	
		Closed									5	14.5
	MHZJ2-20□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—	
Closed		3									3	11
MHZJ2-25□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—		
	Closed									2	2	9.5
<b>Long stroke</b>	<b>Double acting</b>	MHZL2-10D	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	0.5	
			Closed								8.5	7.5
		MHZL2-16D	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—
			Closed									8
	MHZL2-20D	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—	
		Closed									7	7
	MHZL2-25D	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—	
		Closed									5.5	5.5
	<b>Single acting (normally open)</b>	MHZL2-10S	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—
			Closed									—
		MHZL2-16S	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—
			Closed									3
	MHZL2-20S	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—	
		Closed									1	1
MHZL2-25S	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—		
	Closed									—	—	—
<b>Single acting (normally closed)</b>	MHZL2-10C	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—	
		Closed									5.5	4.5
	MHZL2-16C	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—	
		Closed									5.5	3.5
MHZL2-20C	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—		
	Closed									3.5	3.5	1.5
MHZL2-25C	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	—		
	Closed									1.5	1.5	—

Note) There is no protrusion for sections of the table with no values entered.

**End boss type**

Lead wire type			In-line					Perpendicular			
Illustration	Auto switch		Finger position								
	Model		D-Y59□ D-Y7P	D-Y7□W	D-F9□	D-F9□W	D-F9BAL	D-Y69□ D-Y7PV	D-Y7□WV	D-F9□V	D-F9□WV
<b>With dust cover</b>	MHZJ2-10□□□	Open	No setting	—	No setting	4	No setting	—	No setting	—	
		Closed		—		8		—			
	MHZJ2-16□□□	Open		—	1	—		No setting	—		
		Closed		—	6.5	—					
	MHZJ2-20□□□	Open		—	—	—		No setting	—		
		Closed		—	3	—					
	MHZJ2-25□□□	Open		—	—	—		No setting	—		
		Closed		—	1.5	—					

Note) There is no protrusion for sections of the table with no values entered.

- MHZ**
- MHQ
- MHL2
- MHR
- MHK
- MHS
- MHC2
- MHT2
- MHY2
- MHW2
- MRHQ
- Auto Switch



# Series MHZ Order Made Specifications

Contact SMC for detailed dimensions, specifications and lead times.




Symbol

X7  
- X12

## 1 Spring Assisted Type

### Compact Type/MHZA2-6, MHZAJ2-6

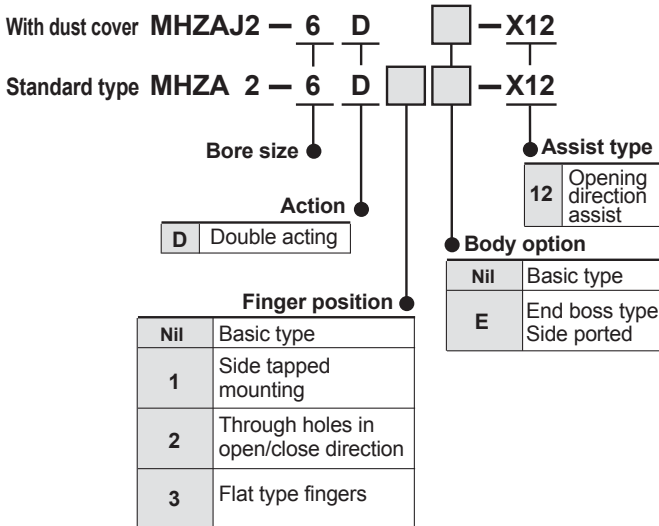


#### Specifications

Type	Spring assisted type
Bore size	6
Action	Double acting
Fluid	Air

Note) Dimensions are the same as the standard type.

### With Dust Cover/MHZJ2

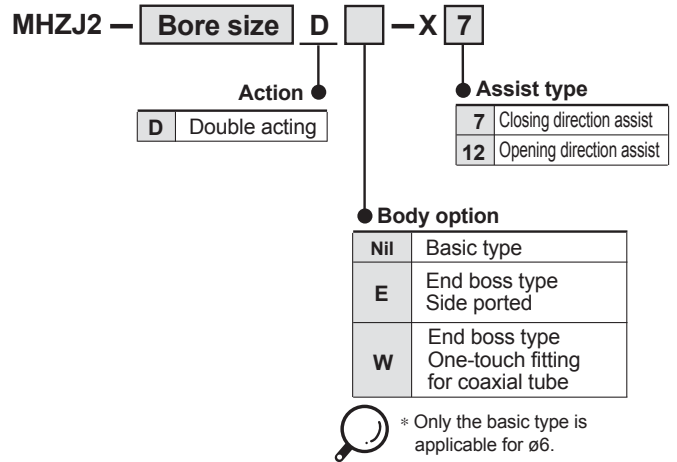


#### Specifications

Type	Spring assisted type
Bore size	6, 10, 16, 20, 25
Action	Double acting
Fluid	Air

Note) Dimensions are the same as the standard type.

### Standard Type/MHZ2

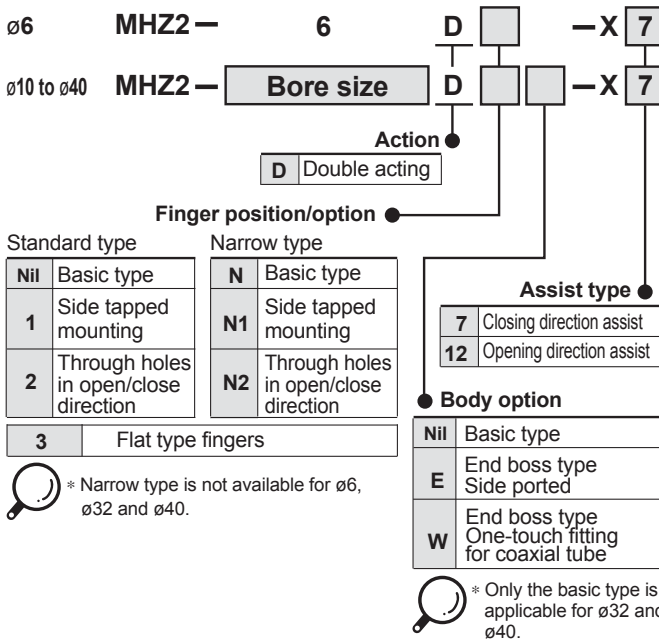


#### Specifications

Type	Spring assisted type
Bore size	6, 10, 16, 20, 25, 32, 40
Action	Double acting
Fluid	Air

Note) Dimensions of ø6 to ø25 are the same as the standard type.  
Dimensions of ø32 and ø40 are the same as the standard single acting type.

### Long Stroke/MHZL2

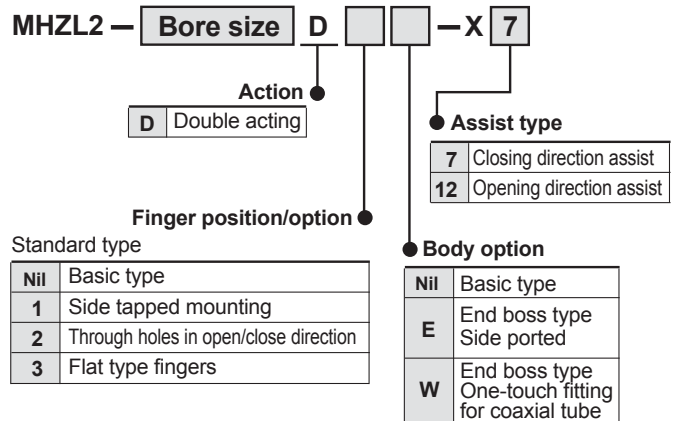


#### Specifications

Type	Spring assisted type
Bore size	10, 16, 20, 25
Action	Double acting
Fluid	Air

Dimensions are the same as the single acting type.

## 2 With Needle (with Variable Throttle) -X46


Installation of a variable throttle allows adjustment of the finger opening/closing speed.

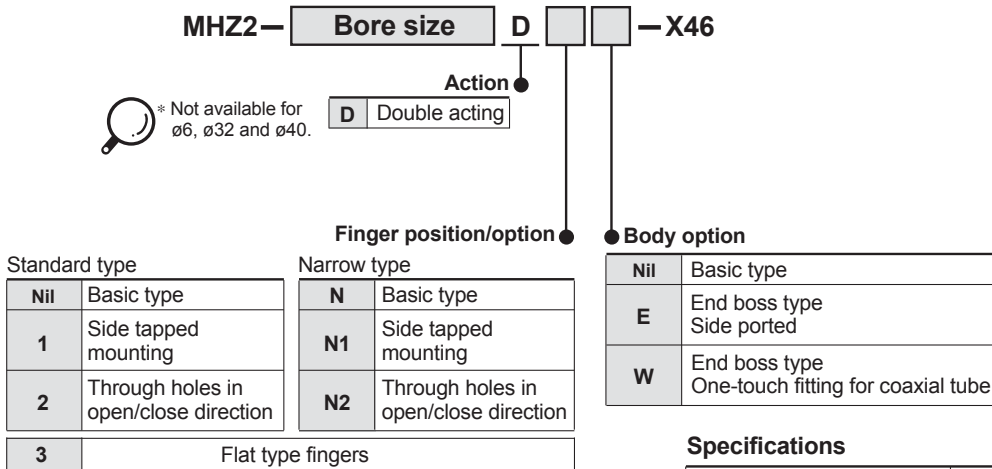

### Specifications

Type	With needle
Bore size	10, 16, 20, 25
Action	Double acting
Fluid	Air

### Dimensions

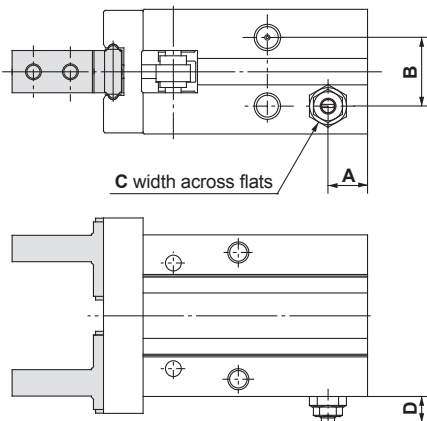

Model	A	B	C	D*
MHZ2-10D□□-X46	9	11	4.5	5.2
MHZ2-16D□□-X46	7.5	13	7	5.8
MHZ2-20D□□-X46	10	15	7	6
MHZ2-25D□□-X46	10.7	20	7	6.2

Dimensions other than the above are identical to the standard type; refer to pages 2.1-22 through 2.1-25.

\* Reference values to establish criteria for needle adjustment.

Adjust so that the finger opening/closing speed will be no greater than necessary. If the finger opening/closing speed is greater than necessary, impact forces acting on the fingers and other parts will increase. This can cause a loss of repeatability when gripping work pieces and have an adverse effect on the life of the unit.

### Guide for internal needle adjustment

Model	Number of rotations from fully closed needle condition <sup>Note 1)</sup>
MHZ2-10D□□-X46	1/4 to 1/2
MHZ2-16D□□-X46	1/2 to 1
MHZ2-20D□□-X46	1 to 1 1/2
MHZ2-25D□□-X46	1 1/2 to 2

Note 1) The condition in which the needle is tightened gently until it stops.

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2


MRHQ

Auto Switch

## 3 MHQ2/MHQG2 Compatible Flat Finger Type

**-X51**


The flat finger type can be selected depending on the intended application.

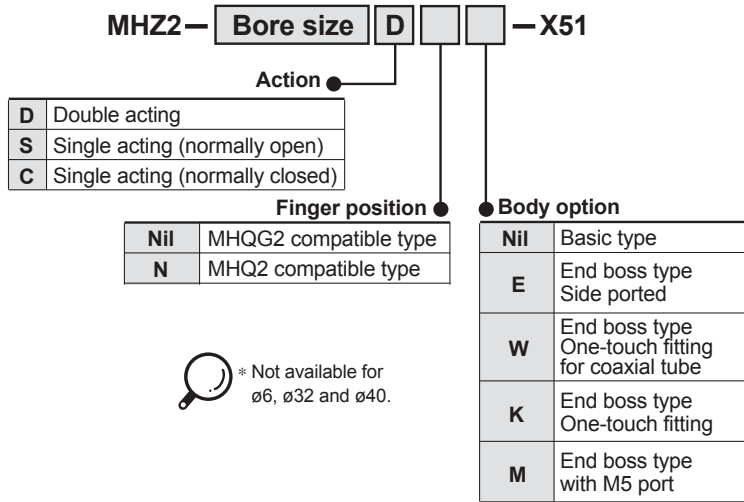

### Specifications

Type	Flat finger type
Bore size	10, 16, 20, 25
Action	Double acting, Single acting (normally open, normally closed)
Fluid	Air

### Dimensions

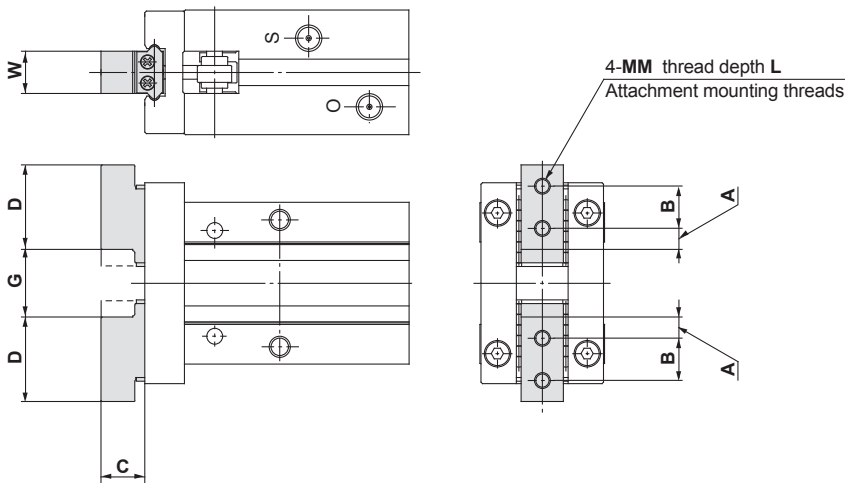

Unit: mm

Model		A	B	C	D	G		MM	L	W
						Open	Closed			
MHZ2-10□□□-X51	MHQG2 compatible	3	6	5.2	12	9.7 <sup>+2.2</sup> <sub>0</sub>	5.7 <sup>0</sup> <sub>-0.4</sub>	M2	3.6	5 <sup>0</sup> <sub>-0.05</sub>
	MHQ2 compatible	2	5	5.2	9	9.7 <sup>+2.2</sup> <sub>0</sub>	5.7 <sup>0</sup> <sub>-0.4</sub>	M2	3.6	5 <sup>0</sup> <sub>-0.05</sub>
MHZ2-16□□□-X51	MHQG2 compatible	4	8	8.3	16	12.6 <sup>+2.2</sup> <sub>0</sub>	6.6 <sup>0</sup> <sub>-0.4</sub>	M3	6	8 <sup>0</sup> <sub>-0.05</sub>
	MHQ2 compatible	2.5	7	8.3	12	12.6 <sup>+2.2</sup> <sub>0</sub>	6.6 <sup>0</sup> <sub>-0.4</sub>	M3	6	8 <sup>0</sup> <sub>-0.05</sub>
MHZ2-20□□□-X51	MHQG2 compatible	5	10	10.5	20.8	17.2 <sup>+2.2</sup> <sub>0</sub>	7.2 <sup>0</sup> <sub>-0.4</sub>	M4	8	10 <sup>0</sup> <sub>-0.05</sub>
	MHQ2 compatible	3.3	9	10.5	15.5	17.2 <sup>+2.2</sup> <sub>0</sub>	7.2 <sup>0</sup> <sub>-0.4</sub>	M4	8	10 <sup>0</sup> <sub>-0.05</sub>
MHZ2-25□□□-X51	MHQG2 compatible	6.5	12	13.1	25	22.8 <sup>+2.5</sup> <sub>0</sub>	8.8 <sup>0</sup> <sub>-0.4</sub>	M5	10	12 <sup>0</sup> <sub>-0.05</sub>
	MHQ2 compatible	3.5	12	13.1	19	22.8 <sup>+2.5</sup> <sub>0</sub>	8.8 <sup>0</sup> <sub>-0.4</sub>	M5	10	12 <sup>0</sup> <sub>-0.05</sub>

Dimensions other than the above are identical to the standard type; refer to pages 2.1-22 through 2.1-25.

# Series MHZ Model Selection

## Model Selection

### Selection procedure



### Step 1 Confirmation of gripping force



**Example**

Work piece weight: 0.1kg

Gripping method: External gripping

Gripping point distance: L = 30mm

Operating pressure: 0.4MPa

**Model selection criteria with respect to work piece weight**

- Although differences will exist depending upon factors such as shape and the coefficient of friction between the attachments and the work pieces, select a model which will provide a gripping force at least 10 to 20 times <sup>Note)</sup> greater than the work piece weight.
- Note) For further details, refer to the model selection illustration.
- Furthermore, in cases with high acceleration or impact, etc., it is necessary to allow an even greater margin of safety.


Example: When it is desired to set the gripping force at 20 times or more above the work piece weight.  
 Required gripping force = 0.1kg x 20 x 9.8m/s<sup>2</sup> (approx.) 19.6N or more

**MHZ□2-16 External gripping**

• Selecting MHZ□2-16D. A gripping force of 24N is obtained from the intersection point of gripping point distance L = 30mm and pressure of 0.4MPa.

• The gripping force is 24.5 times greater than the work piece weight, and therefore satisfies a gripping force setting value of 20 times or more.

### Model selection illustration

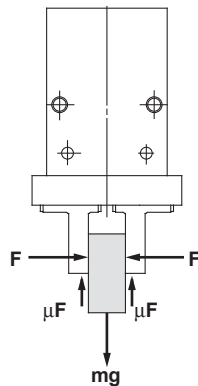

When gripping a work piece as in the figure to the left, and with the following definitions,

- F: Gripping force (N)
  - μ: Coefficient of friction between the attachments and the work piece
  - m: Work piece mass (kg)
  - g: Gravitational acceleration (= 9.8m/s<sup>2</sup>)
  - mg: Work piece weight (N)
- the conditions under which the work piece will not drop are

$$2 \times \mu F > mg$$

Number of fingers

and therefore,

$$F > \frac{mg}{2 \times \mu}$$

With "a" representing the safety margin, F is determined by the following formula:

$$F = \frac{mg}{2 \times \mu} \times a$$

**"Gripping force at least 10 to 20 times the work piece weight"**  
 The "10 to 20 times or more of the work piece weight" recommended by SMC is calculated with a safety margin of a=4, which allows for impacts that occur during normal transportation, etc.

When μ = 0.2	When μ = 0.1
$F = \frac{mg}{2 \times 0.2} \times 4$ $= 10 \times mg$	$F = \frac{mg}{2 \times 0.1} \times 4$ $= 20 \times mg$


10 x work piece weight

20 x work piece weight


Note) Even in cases where the coefficient of friction is greater than μ=0.2, for reasons of safety, select a gripping force which is at least 10 to 20 times greater than the work piece weight, as recommended by SMC. It is necessary to allow a greater safety margin for high accelerations and strong impacts, etc.

**Step 1 Effective gripping force: Series MHZ $\square$ 2/Double acting/External gripping force**

- Expressing the effective gripping force  
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




**External gripping**

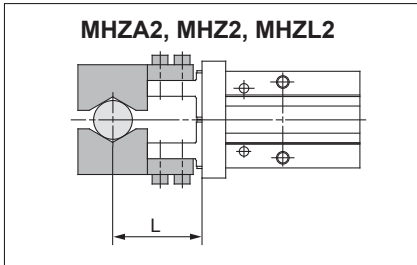


**External gripping force**

**MHZ2-6D/MHZA2-6D**

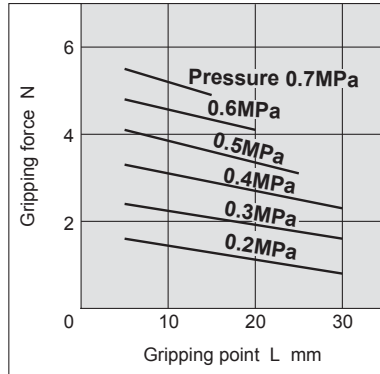


**External gripping force**


**MHZ2-25D/MHZL2-25D**

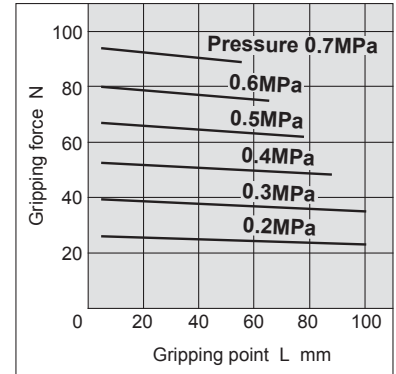


**MHZ2-10D/MHZL2-10D**

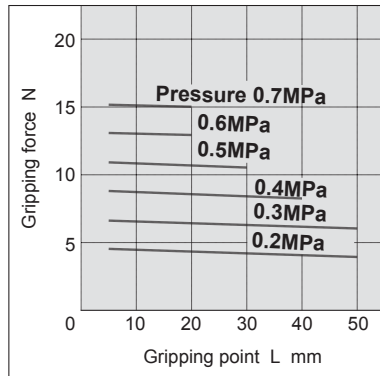


**MHZ2-32D**

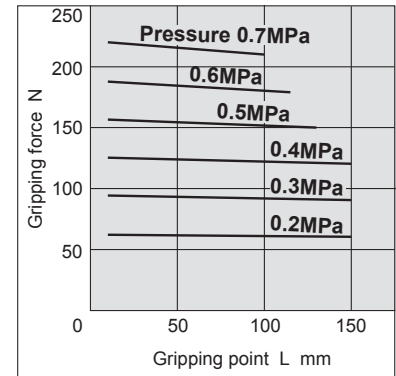


**MHZ2-16D/MHZL2-16D**

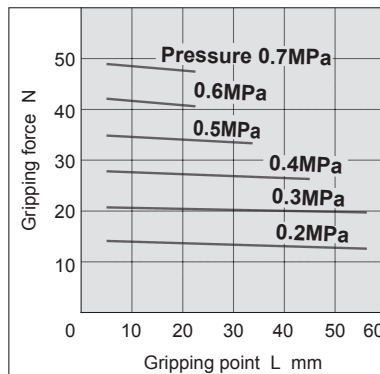

**MHZ2-40D**

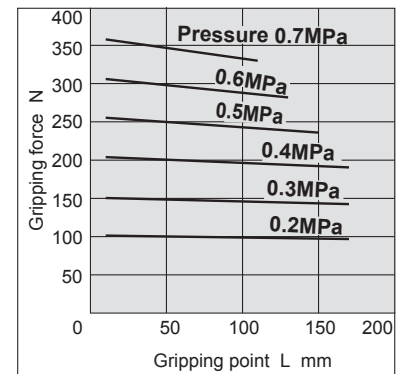

**MHZ2-20D/MHZL2-20D**

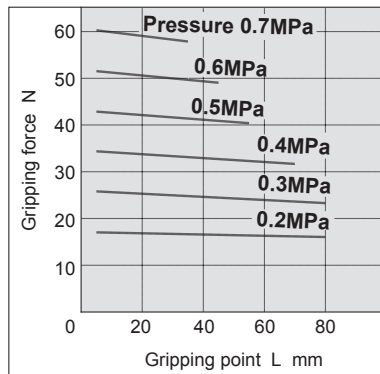


- MHZ**
- MHQ
- MHL2
- MHR
- MHK
- MHS
- MHC2
- MHT2
- MHY2
- MHW2
- MRHQ
- Auto Switch

## Model Selection


### Step 1 Effective gripping force: Series MHZ 2/Double acting/Internal gripping force \_\_\_\_\_

- Expressing the effective gripping force

The effective gripping force shown in the graphs to the right is expressed as  $F$ , which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




#### Internal gripping

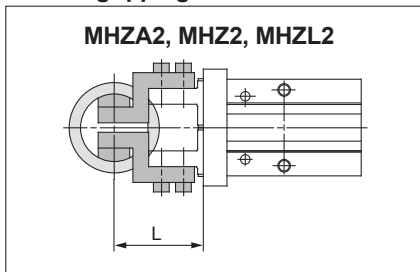


#### Internal gripping force

##### MHZ2-6D/MHZA2-6D

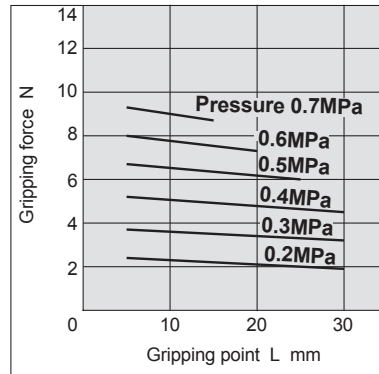


#### Internal gripping force


##### MHZ2-25D/MHZL2-25D

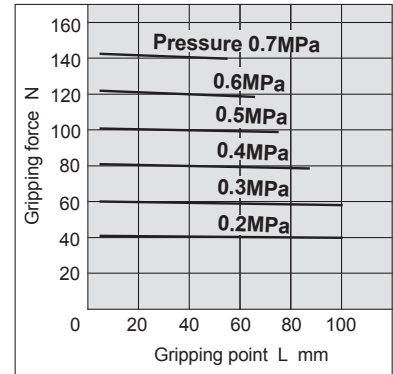


##### MHZ2-10D/MHZL2-10D

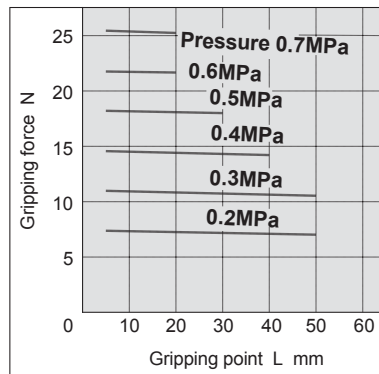


##### MHZ2-32D

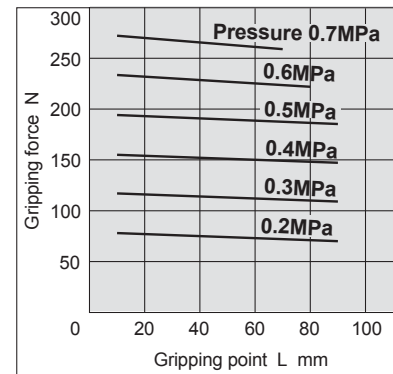


##### MHZ2-16D/MHZL2-16D

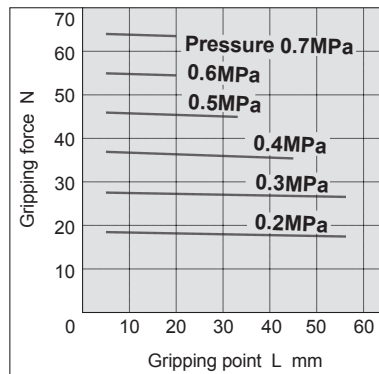

##### MHZ2-40D

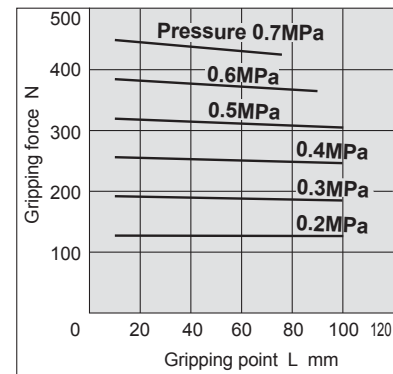


##### MHZ2-20D/MHZL2-20D

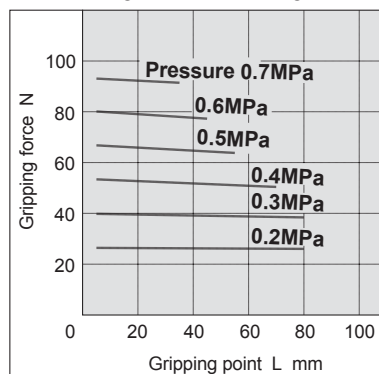


**Step 1** Effective gripping force: Series MHZ 2/Single acting/External gripping force \_\_\_\_\_


• Expressing the effective gripping force  
 The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




**External gripping**

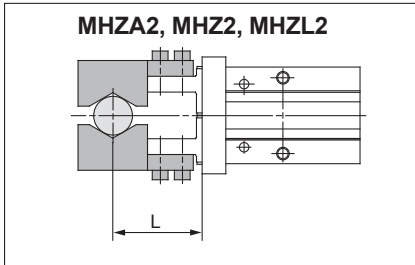


**External gripping force**

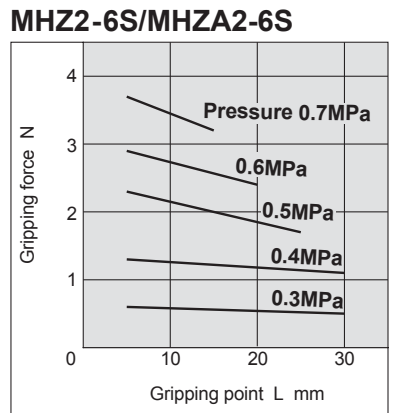


**External gripping force**

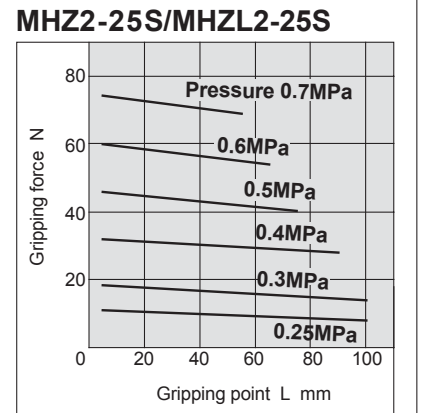


**MHZ2-10S/MHZL2-10S**

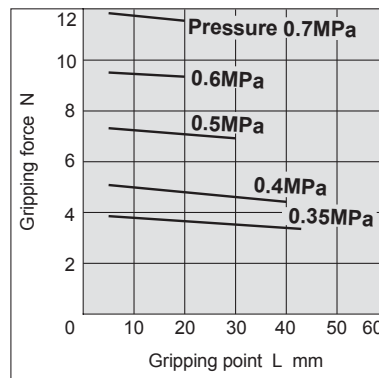


**MHZ2-32S**

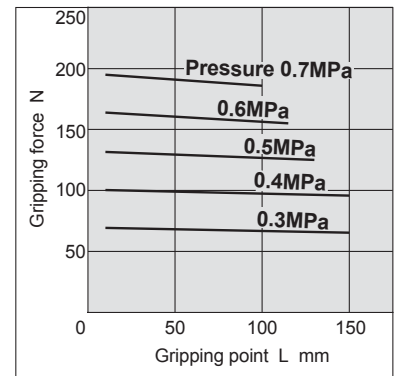


**MHZ2-16S/MHZL2-16S**

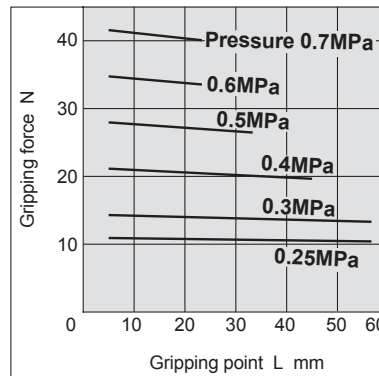

**MHZ2-40S**

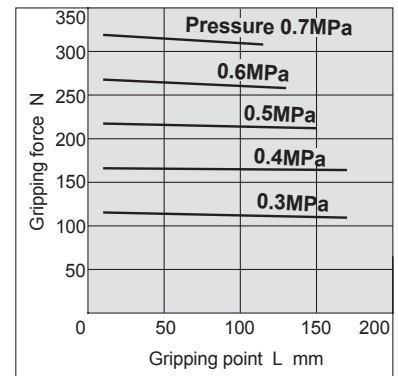

**MHZ2-20S/MHZL2-20S**

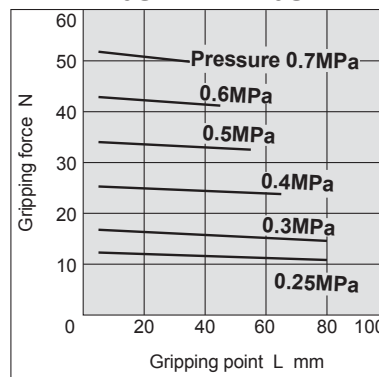


- MHZ**
- MHQ
- MHL2
- MHR
- MHK
- MHS
- MHC2
- MHT2
- MHY2
- MHW2
- MRHQ
- Auto Switch

## Model Selection


### Step 1 Effective gripping force: Series MHZ 2/Single acting/Internal gripping force

- Expressing the effective gripping force

The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




#### Internal gripping

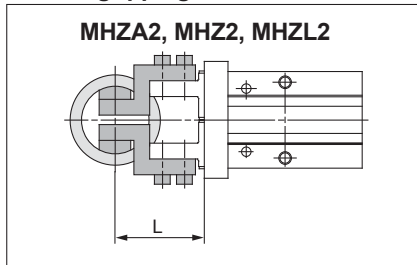


#### Internal gripping force

##### MHZ2-6C/MHZA2-6C

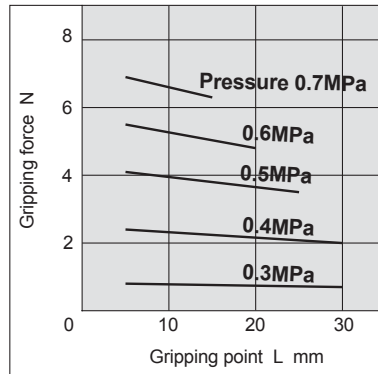


#### Internal gripping force


##### MHZ2-25C/MHZA2-25C

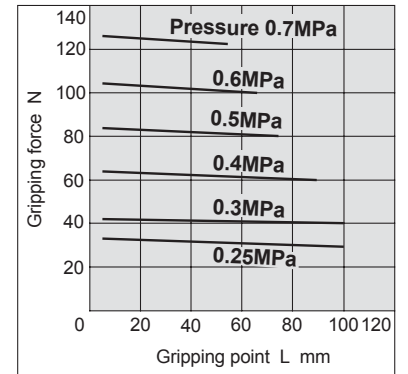


##### MHZ2-10C/MHZA2-10C

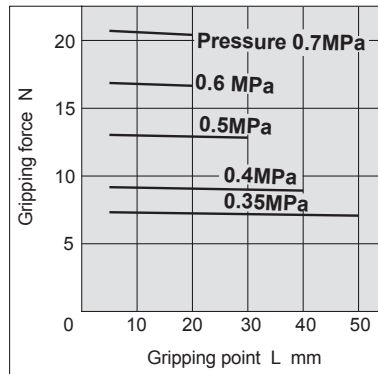


##### MHZ2-32C

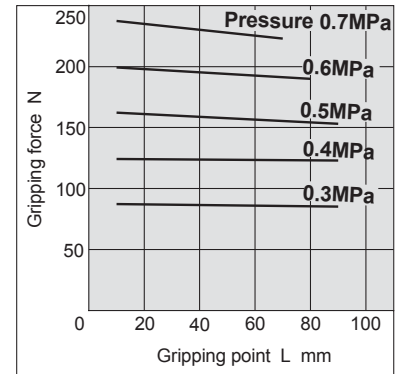


##### MHZ2-16C/MHZA2-16C

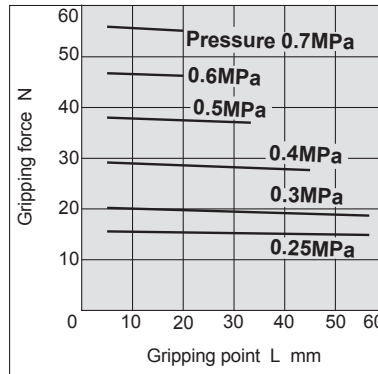

##### MHZ2-40C

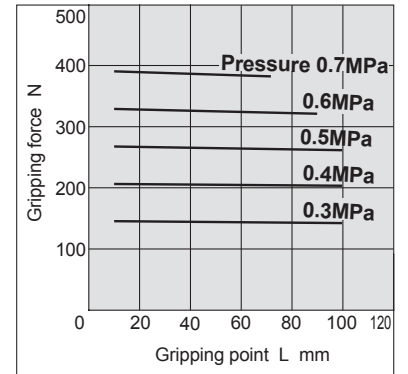


##### MHZ2-20C/MHZA2-20C

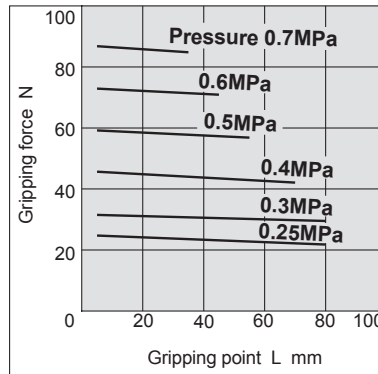




**Step 1 Effective gripping force: Series MHZ 2/Double acting/External gripping force** \_\_\_\_\_

• Expressing the effective gripping force  
 The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




**External gripping**

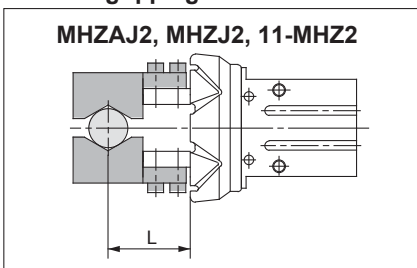


**External gripping force**

**MHZJ2-6D/MHZAJ2-6D**

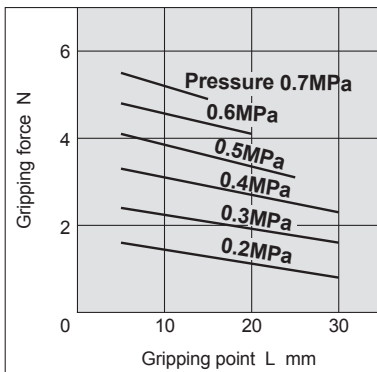


**External gripping force**


**MHZJ2-25D/11-MHZ2-25D**

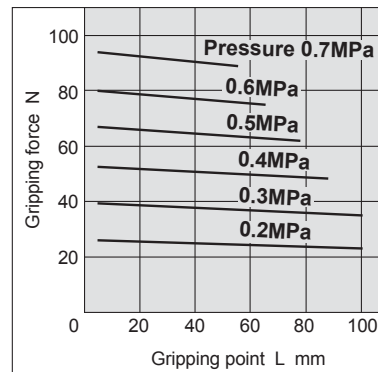


**MHZJ2-10D/11-MHZ2-10D**

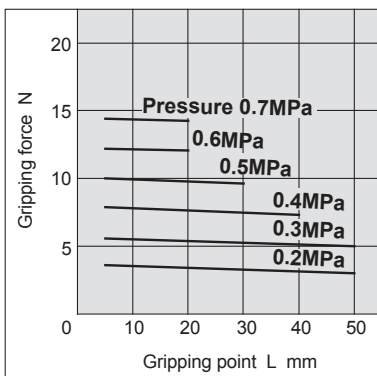

**MHZJ2-16D/11-MHZ2-16D**

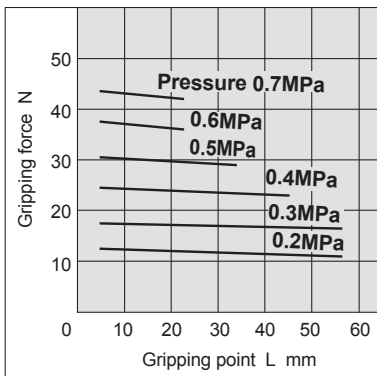

**MHZJ2-20D/11-MHZ2-20D**

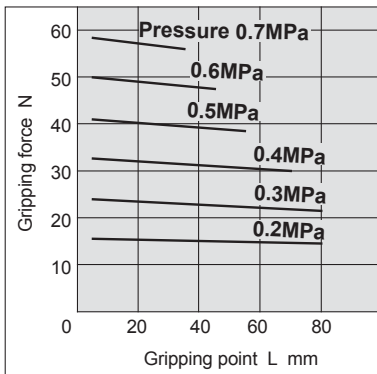

**MHZ**

**MHQ**

**MHL2**

**MHR**

**MHK**

**MHS**

**MHC2**

**MHT2**

**MHY2**

**MHW2**


**MRHQ**

**Auto Switch**


## Model Selection

### Step 1 Effective gripping force: Series MHZ 2/Double acting/Internal gripping force \_\_\_\_\_

- Expressing the effective gripping force  
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




#### Internal gripping

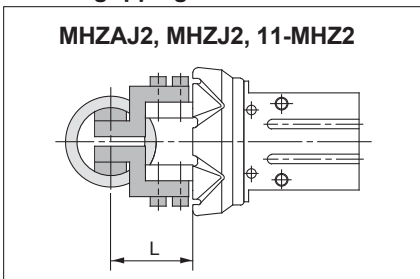


#### Internal gripping force


##### MHZJ2-6D/MHZAJ2-6D

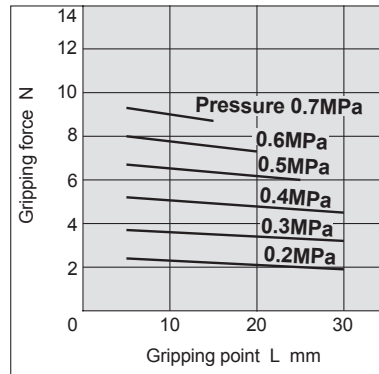


##### MHZJ2-10D/11-MHZ2-10D

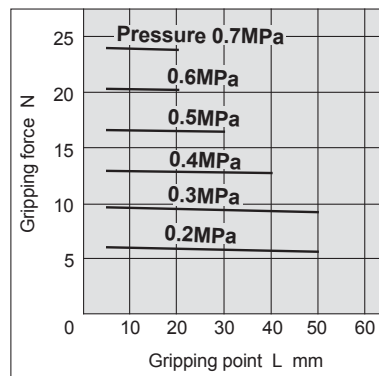

##### MHZJ2-16D/11-MHZ2-16D

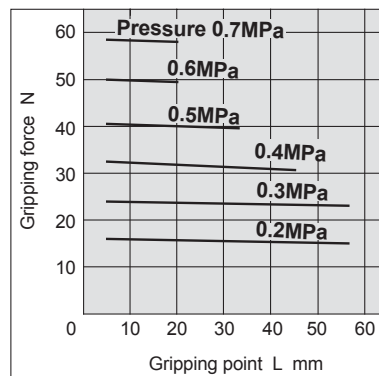


##### MHZJ2-20D/11-MHZ2-20D

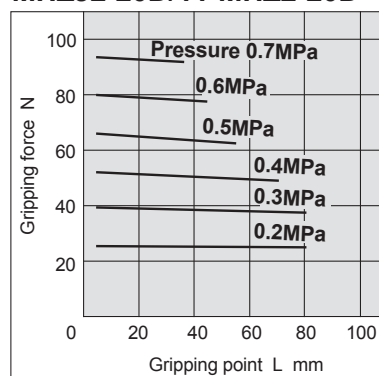


#### Internal gripping force

##### MHZJ2-25D/11-MHZ2-25D

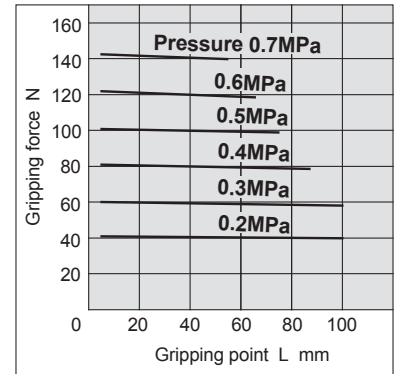


**Step 1 Effective gripping force: Series MHZ 2/Single acting/External gripping force** \_\_\_\_\_

• Expressing the effective gripping force  
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




**External gripping**

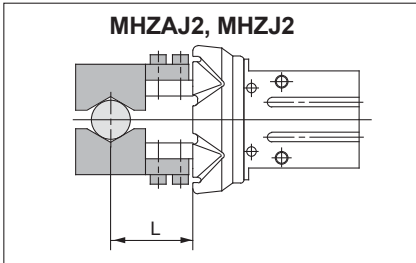


**External gripping force**

**MHZJ2-6S/MHZAJ2-6S**

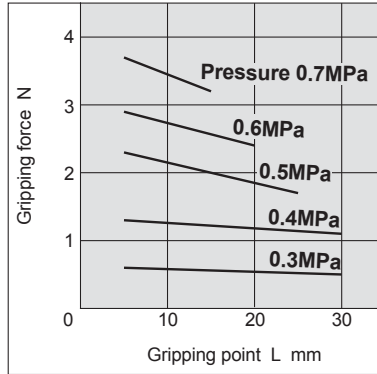


**External gripping force**


**MHZJ2-25S**

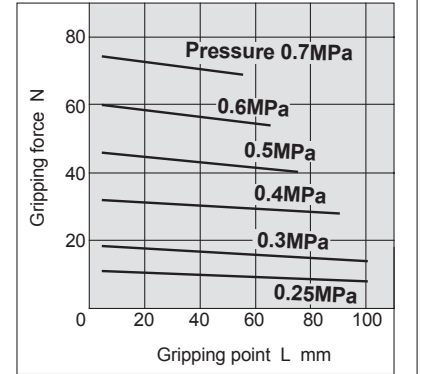


**MHZJ2-10S**

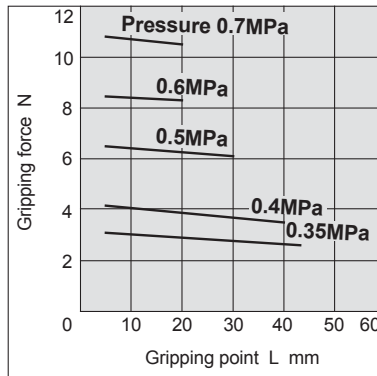

**MHZJ2-16S**

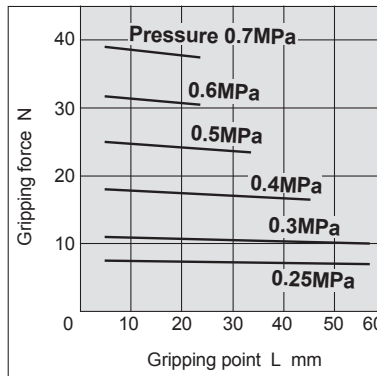

**MHZJ2-20S**

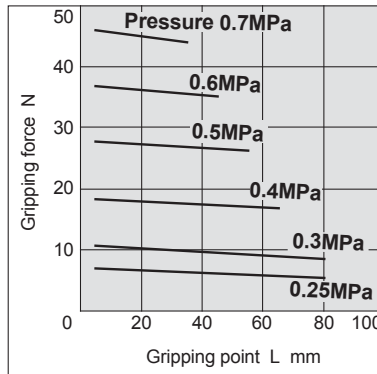


- MHZ**
- MHQ**
- MHL2**
- MHR**
- MHK**
- MHS**
- MHC2**
- MHT2**
- MHY2**
- MHW2**
- MRHQ**
- Auto Switch**


## Model Selection

### Step 1 Effective gripping force: Series MHZ 2/Single acting/Internal gripping force \_\_\_\_\_

- Expressing the effective gripping force  
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




#### Internal gripping

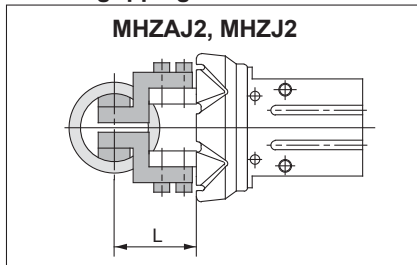


#### Internal gripping force

##### MHZJ2-6C/MHZAJ2-6C

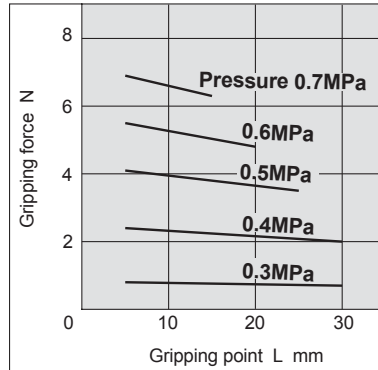


#### Internal gripping force


##### MHZJ2-25C

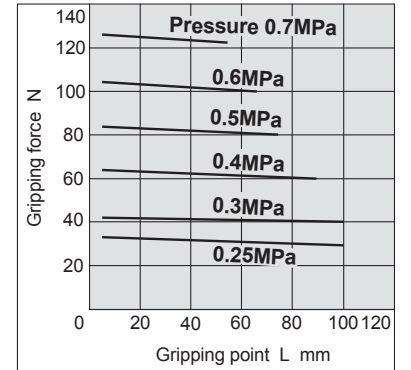


##### MHZJ2-10C

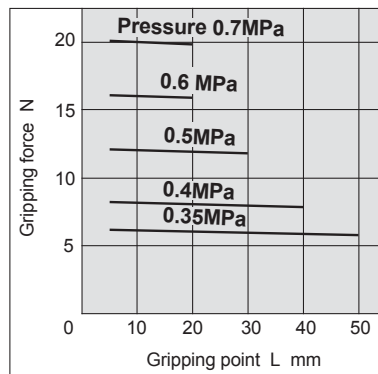

##### MHZJ2-16C

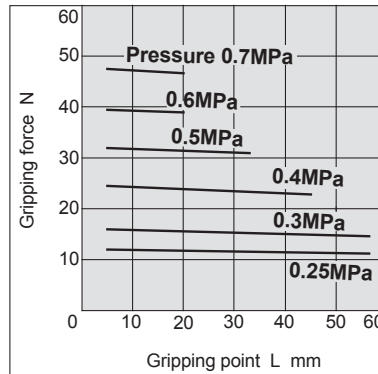


##### MHZJ2-20C

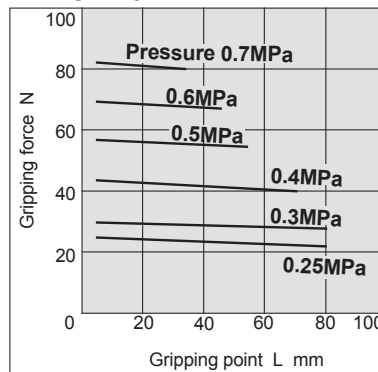

**Step 2 Confirmation of gripping point: Series MHZ □/External gripping**


**External gripping**

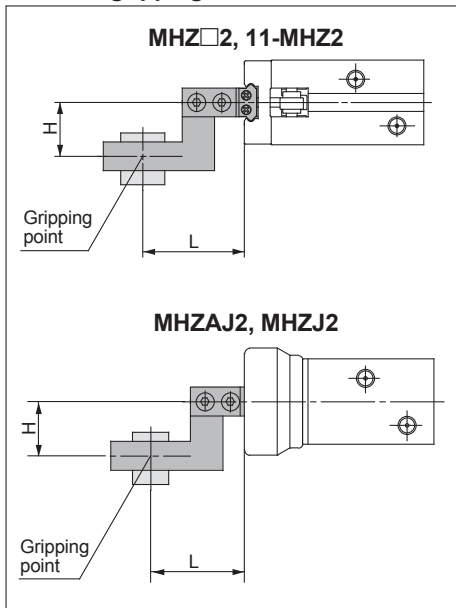


- The air gripper should be operated so that the work piece gripping point "L" and the amount of overhang "H" stay within the range shown for each operating pressure given in the graphs to the right.
- If the work piece gripping point goes beyond the range limits, this will have an adverse effect on the life of the air gripper.

**External gripping**


**MHZ □2-6 □**

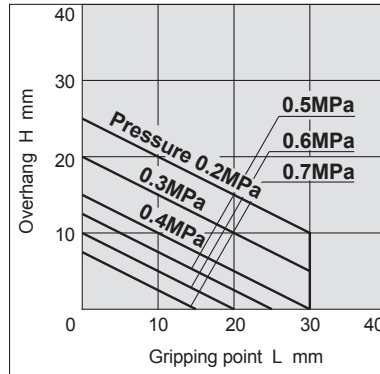


**MHZ □2-10 □/11-MHZ2-10 □**

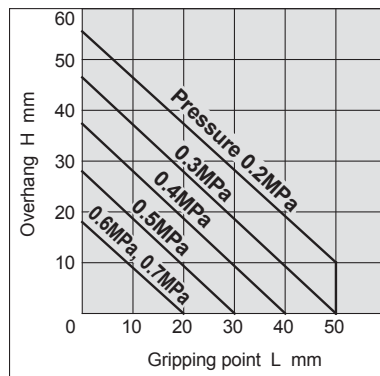

**MHZ □2-16 □/11-MHZ2-16 □**

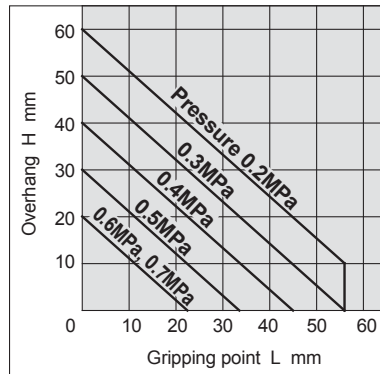


**MHZ □2-20 □/11-MHZ2-20 □**

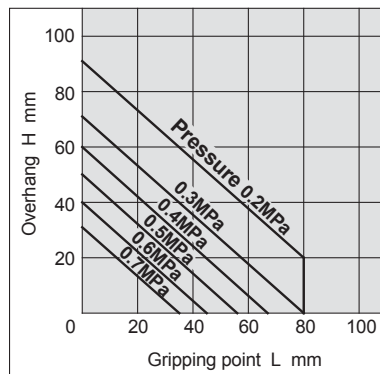


**External gripping**


**MHZ □2-25 □/11-MHZ2-25 □**

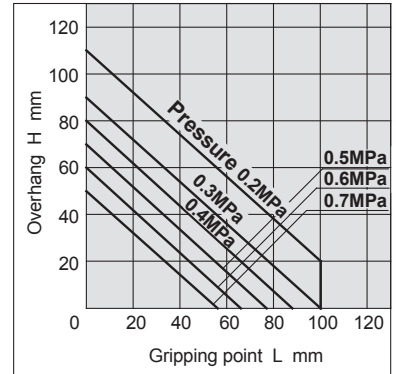

**MHZ2-32 □**

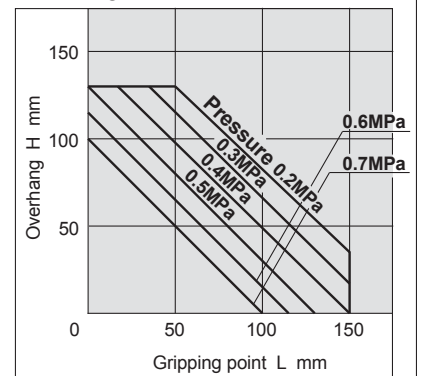

**MHZ2-40 □**

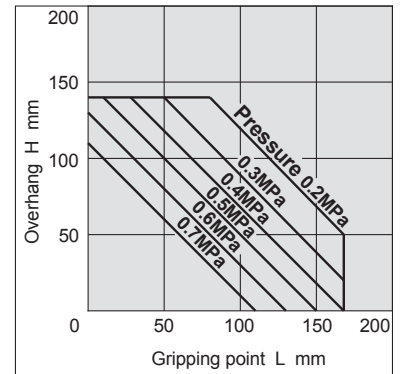

MHZ

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2


MRHQ

Auto Switch

## Model Selection

### Step 2 Confirmation of gripping point: Series MHZ □/Internal gripping


#### Internal gripping

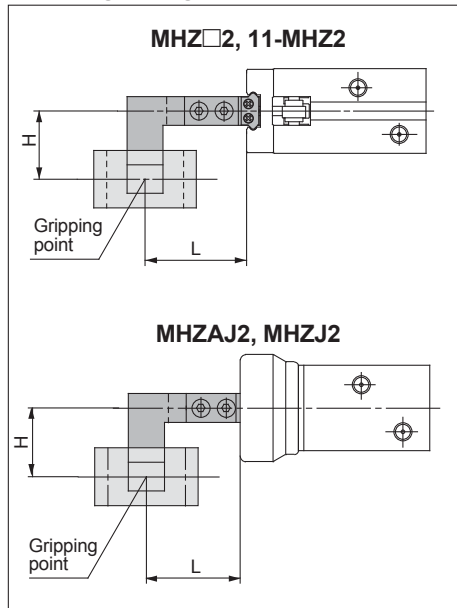


- The air gripper should be operated so that the work piece gripping point "L" and the amount of overhang "H" stay within the range shown for each operating pressure given in the graphs to the right.
- If the work piece gripping point goes beyond the range limits, this will have an adverse effect on the life of the air gripper.

#### Internal gripping


**MHZ □2-6 □**

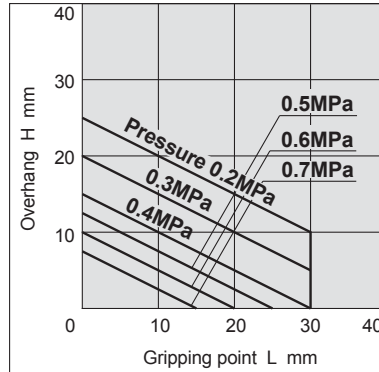


**MHZ □2-10 □/11-MHZ2-10 □**

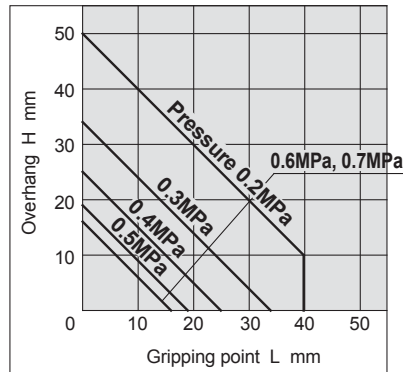

**MHZ □2-16 □/11-MHZ2-16 □**

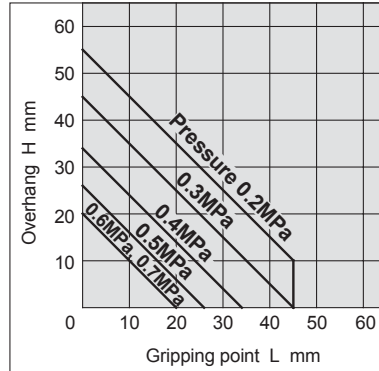


**MHZ □2-20 □/11-MHZ2-20 □**

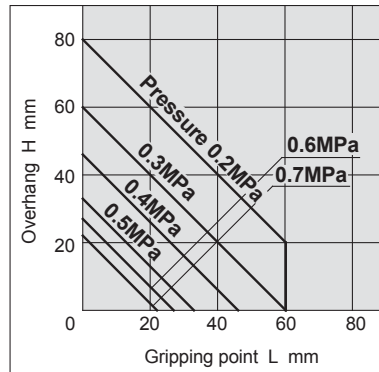


#### Internal gripping


**MHZ □2-25 □/11-MHZ2-25 □**

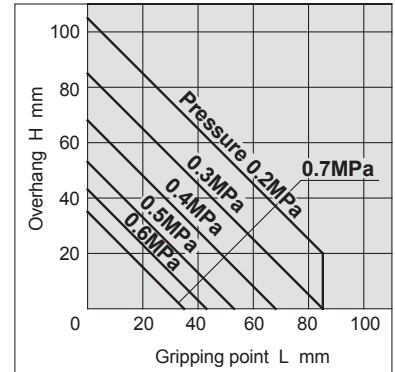


**MHZ2-32 □**

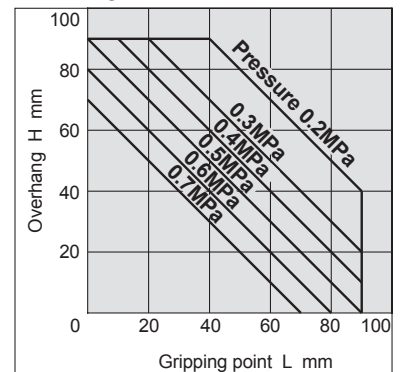

**MHZ2-40 □**

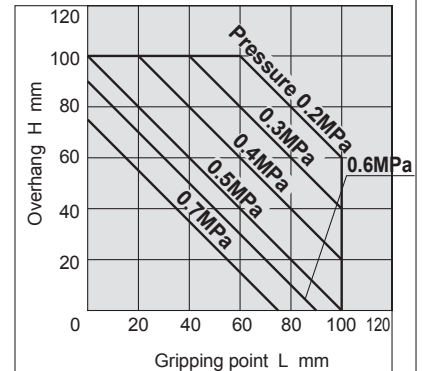

**Step 3** Confirmation of external force on fingers: Series MHZ □ 2

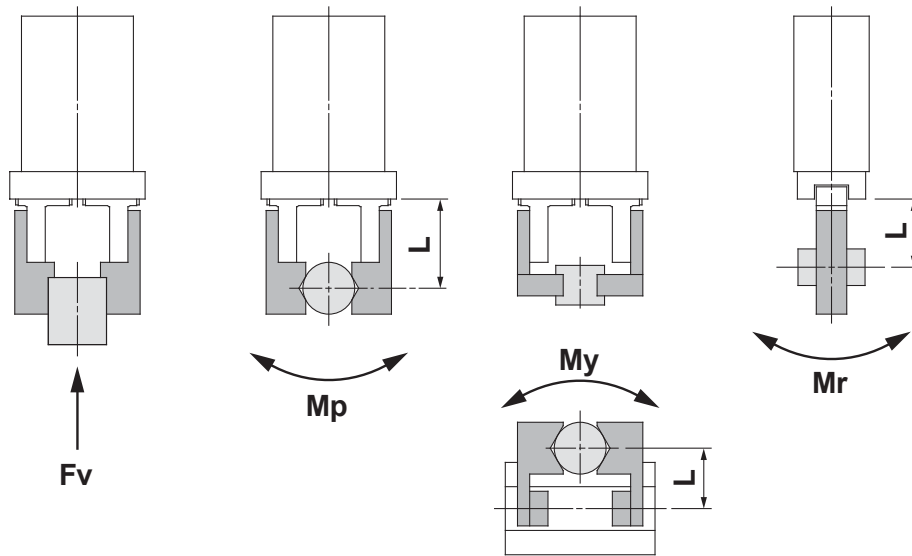

L: Distance to the point at which the load is applied (mm)

Model	Allowable vertical load <b>Fv (N)</b>	Maximum allowable moment		
		Pitch moment: <b>Mp (N·m)</b>	Yaw moment: <b>My (N·m)</b>	Roll moment: <b>Mr (N·m)</b>
<b>MHZ □ 2-6</b>	10	0.04	0.04	0.08
<b>MHZ □ 2-10</b>	58	0.26	0.26	0.53
<b>MHZ □ 2-16</b>	98	0.68	0.68	1.36
<b>MHZ □ 2-20</b>	147	1.32	1.32	2.65
<b>MHZ □ 2-25</b>	255	1.94	1.94	3.88
<b>MHZ □ 2-32</b>	343	3	3	6
<b>MHZ □ 2-40</b>	490	4.5	4.5	9

Note) Values for load and moment in the table indicate static values.

Calculation of allowable external force (when moment load is applied)	Calculation example
$\text{Allowable load } F \text{ (N)} = \frac{M \text{ (maximum allowable moment) (N·m)}}{L \times 10^{-3} \text{ (*)}}$ <p>(* Unit conversion constant)</p>	<p>When a static load of <math>f = 10\text{N}</math> is operating, which applies pitch moment to point <math>L = 30\text{mm}</math> from the MHZ □ 2-16D guide.</p> $\text{Allowable load } F = \frac{0.68}{30 \times 10^{-3}}$ $= 22.7 \text{ (N)}$ <p><b>Load <math>f = 10 \text{ (N)} &lt; 22.7 \text{ (N)}</math></b> Therefore, it can be used.</p>

MHZ  
MHQ  
MHL2  
MHR  
MHK  
MHS

MHC2  
MHT2  
MHY2  
MHW2  
MRHQ  
Auto Switch