


Band mounting style

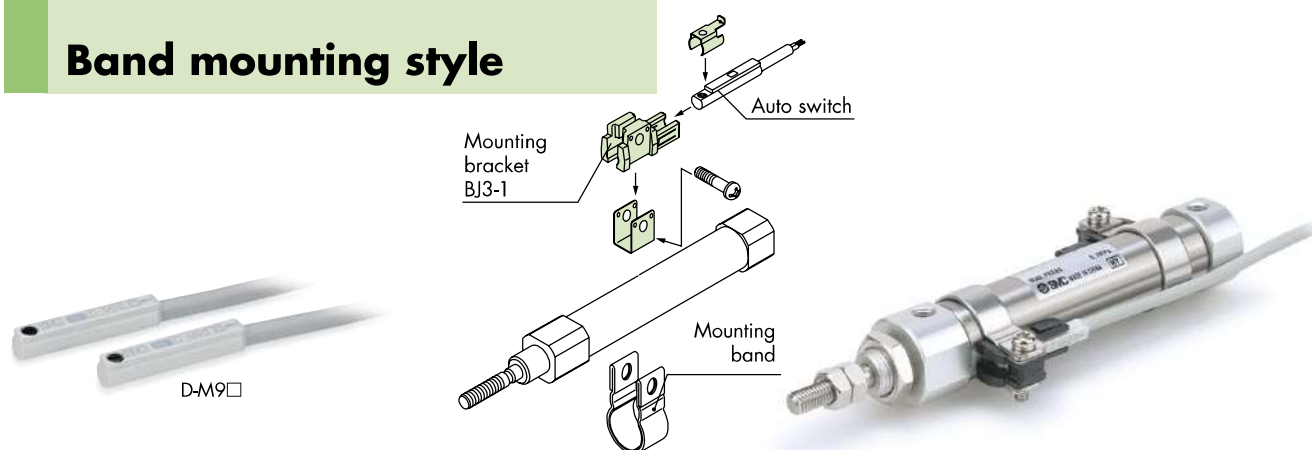

Applicable Auto Switch + Mounting Bracket (BJ3-1) + Mounting band

Applicable Series	Bore size (mm)	Reed switch type		Solid state switch type		Auto switch with pre-wired connector
		24 VDC 2-wire	24 VDC 3-wire (PNP)	24 VDC 3-wire (NPN)	24 VDC Diagnostic indication (2-colour indication) 3-wire (PNP)	
C85 (ø8 to 16) * CJ2 (ø6, 10, 16) CJ2 (ø16)	6	D-A93L + BJ3-1 + BJ2-006	D-M9PL + BJ3-1 + BJ2-006	D-M9NL + BJ3-1 + BJ2-006	D-M9PWL + BJ3-1 + BJ2-006	 24 VDC 3-wire (PNP): D-M9PSAPC 24 VDC 3-wire (NPN): D-M9NSAPC
	8	—	D-M9PL + BJ3-1 + BJ2-008	D-M9NL + BJ3-1 + BJ2-008	D-M9PWL + BJ3-1 + BJ2-008	
	10	D-A93L + BJ3-1 + BJ2-010	D-M9PL + BJ3-1 + BJ2-010	D-M9NL + BJ3-1 + BJ2-010	D-M9PWL + BJ3-1 + BJ2-010	
	12	—	D-M9PL + BJ3-1 + BJ2-012	D-M9NL + BJ3-1 + BJ2-012	D-M9PWL + BJ3-1 + BJ2-012	
	16	D-A93L + BJ3-1 + BJ2-016	D-M9PL + BJ3-1 + BJ2-016	D-M9NL + BJ3-1 + BJ2-016	D-M9PWL + BJ3-1 + BJ2-016	
C85 (ø20, 25) * C76 (ø32, 40) CM2 CLM2	20	D-A93L + BJ3-1 + BM2-020	D-M9PL + BJ3-1 + BM2-020	D-M9NL + BJ3-1 + BM2-020	D-M9PWL + BJ3-1 + BM2-020	24 VDC Diagnostic indication (2-color indication) 3-wire (PNP): D-M9PWSAPC
	25	D-A93L + BJ3-1 + BM2-025	D-M9PL + BJ3-1 + BM2-025	D-M9NL + BJ3-1 + BM2-025	D-M9PWL + BJ3-1 + BM2-025	
	32	D-A93L + BJ3-1 + BM2-032	D-M9PL + BJ3-1 + BM2-032	D-M9NL + BJ3-1 + BM2-032	D-M9PWL + BJ3-1 + BM2-032	
	40	D-A93L + BJ3-1 + BM2-040	D-M9PL + BJ3-1 + BM2-040	D-M9NL + BJ3-1 + BM2-040	D-M9PWL + BJ3-1 + BM2-040	
CG1 ** CLG1 (ø20 to 40) CNG (ø20 to 40) MGC (ø20 to 50) MGG REC (ø20 to 40) RHC ** RSG (ø40, 50)	20	D-A93L + BJ3-1 + BMA2-020	D-M9PL + BJ3-1 + BMA2-020	D-M9NL + BJ3-1 + BMA2-020	D-M9PWL + BJ3-1 + BMA2-020	• Lead wire length = 0.5 m, consult SMC for other length.
	25	D-A93L + BJ3-1 + BMA2-025	D-M9PL + BJ3-1 + BMA2-025	D-M9NL + BJ3-1 + BMA2-025	D-M9PWL + BJ3-1 + BMA2-025	
	32	D-A93L + BJ3-1 + BMA2-032	D-M9PL + BJ3-1 + BMA2-032	D-M9NL + BJ3-1 + BMA2-032	D-M9PWL + BJ3-1 + BMA2-032	
	40	D-A93L + BJ3-1 + BMA2-040	D-M9PL + BJ3-1 + BMA2-040	D-M9NL + BJ3-1 + BMA2-040	D-M9PWL + BJ3-1 + BMA2-040	
	50	D-A93L + BJ3-1 + BMA2-050	D-M9PL + BJ3-1 + BMA2-050	D-M9NL + BJ3-1 + BMA2-050	D-M9PWL + BJ3-1 + BMA2-050	
	63	D-A93L + BJ3-1 + BMA2-063	D-M9PL + BJ3-1 + BMA2-063	D-M9NL + BJ3-1 + BMA2-063	D-M9PWL + BJ3-1 + BMA2-063	

• Lead wire length = 3 m, consult SMC for other length.

• Since there are other applicable auto switches than listed, refer to Best Pneumatics catalogue for details.

(*) ø8 to ø12, solid state switches only can be used.

(**) See separate table for CG1 and RHC with 80 and 100mm bore size.

Stainless Steel Cylinder:

Series CJ5-S

Series CG5-S

Water resistant 2-colour indication type. Solid state switch, 2-wire, 24VDC	Auto switch model	Mounting bracket no.		Auto switch model	Mounting bracket no.							
		ø10	ø16		ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
	D-H7BAL	BJ2-010S	BJ2-016S	D-G5BAL	NBA-088S	NBA-106S	BGS1-032S	BAF-04S	BAF-05S	BAF-06S	BAF-08S	BAF-10S