

Fieldbus System For Output


EX260 Series




Compact design	Compact design for space saving
Number of outputs	32/16 digital output type available for each unit in the series (IO-Link and PROFI-safe are only compatible with the 32-point digital output type.)
Output polarity	Negative common (PNP)/positive common (NPN) type available for each unit in the series (Only negative common (PNP) is available for Ethernet POWERLINK, IO-Link, and PROFI-safe.)
Enclosure	IP67 (For units with a D-sub connector, and when connected with S0700 manifolds, it is IP40.)
Internal terminating resistor	ON/OFF switching is possible with an internal terminating resistor for communication. (Only for units compatible with M12 PROFIBUS DP, CC-Link communication connectors)

Applicable Manifold


SY3000/5000/7000




JSY1000/3000/5000




VQC1000/2000/4000/5000

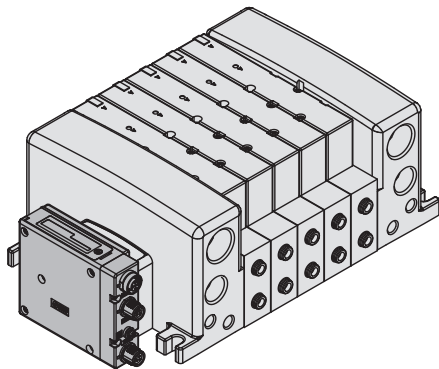

S0700



SV1000/2000/3000



How to Order SI Units

EX260 - S PR1

Communication protocol

Symbol	Protocol	Number of outputs	Output polarity	Communication connector	Manifold symbol	Applicable manifold	
DN1	DeviceNet™	32	Source/PNP (Negative common)	M12	QAN	SY3000/5000/7000 JSY1000/3000/5000 VQC1000/2000/4000/5000 S0700 SV1000/2000/3000	
DN2			Sink/NPN (Positive common)		QA		
DN3		16	Source/PNP (Negative common)		QBN		
DN4			Sink/NPN (Positive common)		QB		
PR1	PROFIBUS DP	32	Source/PNP (Negative common)	M12	NAN		
PR2			Sink/NPN (Positive common)		NA		
PR3		16	Source/PNP (Negative common)		NBN		
PR4			Sink/NPN (Positive common)		NB		
PR5		D-sub*1	32		Source/PNP (Negative common)		NCN
PR6					Sink/NPN (Positive common)		NC
PR7			16		Source/PNP (Negative common)		NDN
PR8					Sink/NPN (Positive common)		ND
MJ1	CC-Link	32	Source/PNP (Negative common)	M12	VAN		
MJ2			Sink/NPN (Positive common)		VA		
MJ3		16	Source/PNP (Negative common)		VBN		
MJ4			Sink/NPN (Positive common)		VB		
EC1	EtherCAT	32	Source/PNP (Negative common)	M12	DAN		
EC2			Sink/NPN (Positive common)		DA		
EC3		16	Source/PNP (Negative common)		DBN		
EC4			Sink/NPN (Positive common)		DB		
PN1	PROFINET	32	Source/PNP (Negative common)	M12	FAN		
PN2			Sink/NPN (Positive common)		FA		
PN3		16	Source/PNP (Negative common)		FBN		
PN4			Sink/NPN (Positive common)		FB		
EN1	EtherNet/IP™	32	Source/PNP (Negative common)	M12	EAN		
EN2			Sink/NPN (Positive common)		EA		
EN3		16	Source/PNP (Negative common)		EBN		
EN4			Sink/NPN (Positive common)		EB		
PL1	Ethernet POWERLINK	32	Source/PNP (Negative common)	M12	GAN		
PL3		16			GBN		
IL1	IO-Link	32	Source/PNP (Negative common)	M12	KAN	SY3000/5000/7000 JSY1000/3000/5000 VQC1000/2000/4000/5000	

*1 Enclosure is IP40 when the communication connector is D-sub.

* For "How to Order Manifold Assembly," refer to the **Web Catalogue** of each valve.

Safety communication compliant SI unit

EX260 - F PS1

Communication protocol

Symbol	Protocol	Number of outputs	Output polarity	Communication connector	Manifold symbol	Applicable manifold
PS1	PROFIsafe	32	Source/PNP (Negative common)	M12	FPN	SY3000/5000/7000 JSY1000/3000/5000 VQC1000/2000/4000/5000

* The use of validated products may be required for valve manifolds used in the safety-related parts of equipment which is compliant with safety standard ISO 13849. For validated products, please contact your SMC sales representative.

Specifications

All SI Units Common Specifications

Power supply for control	Power supply voltage	21.6 to 26.4 VDC*1
	Internal current consumption	100 mA or less*4
Power supply for output	Power supply voltage	22.8 to 26.4 VDC
	Enclosure	IP67*2
Environmental resistance	Operating temperature range	-10 to +50 °C
	Operating humidity range	35 to 85 % RH (No condensation)
	Withstand voltage	500 VAC for 1 minute between terminals and housing
	Insulation resistance	10 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing
Standards		CE marking (EMC directive/RoHS directive), UL (CSA) compliant
Weight		200 g
Accessories	Mounting screw	2 pcs.
	Seal cap (for M12 connector socket)	EX9-AWTS (1 pc.)*3

*1 To serve as the power supply for communication, the power supply voltages are 11 to 25 VDC for the EX260-SDN□, 18 to 30 VDC for the EX260-SIL1, and 20.4 to 28.8 VDC for the EX260-FPS1.

*2 IP40 applies to EX260-SPR5/6/7/8.

*3 Not provided for EX260-SPR5/6/7/8

*4 200 mA or less for the EX260-FPS1

Model		EX260-SPR1/3	EX260-SPR2/4	EX260-SPR5/7	EX260-SPR6/8	EX260-SDN1/3	EX260-SDN2/4
Applicable system	Protocol	PROFIBUS DP				DeviceNet™	
	Version*1	DP-V0				Volume 1 (Edition 3.5) Volume 3 (Edition 1.5)	
	Configuration file*3	GSD file				EDS file	
I/O occupation area (Inputs/Outputs)		SPR1: 0/32 SPR3: 0/16	SPR2: 0/32 SPR4: 0/16	SPR5: 0/32 SPR7: 0/16	SPR6: 0/32 SPR8: 0/16	SDN1: 0/32 SDN3: 0/16	SDN2: 0/32 SDN4: 0/16
Applicable function		—				QuickConnect™	
Communication speed		9.6 k/19.2 k/45.45 k/93.75 k/187.5 k/500 k/1.5 M/3 M/6 M/12 Mbps				125 k/250 k/500 kbps	
Communication connector specification		M12		D-sub*4		M12	
Terminating resistor switch		Built-in			None		
Output	Output type	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)	Sink/NPN (Positive common)
	Number of outputs	SPR1: 32 points SPR3: 16 points	SPR2: 32 points SPR4: 16 points	SPR5: 32 points SPR7: 16 points	SPR6: 32 points SPR8: 16 points	SDN1: 32 points SDN3: 16 points	SDN2: 32 points SDN4: 16 points
	Load	Solenoid valve with surge voltage suppressor 24 VDC, 1.5 W or less (SMC)					
	Supplied voltage	24 VDC					
	Supplied current	SPR1: Max. 2.0 A SPR3: Max. 1.0 A	SPR2: Max. 2.0 A SPR4: Max. 1.0 A	SPR5: Max. 2.0 A SPR7: Max. 1.0 A	SPR6: Max. 2.0 A SPR8: Max. 1.0 A	SDN1: Max. 2.0 A SDN3: Max. 1.0 A	SDN2: Max. 2.0 A SDN4: Max. 1.0 A

Model		EX260-SMJ1/3	EX260-SMJ2/4	EX260-SEC1/3	EX260-SEC2/4	EX260-SPN1/3	EX260-SPN2/4
Applicable system	Protocol	CC-Link		EtherCAT*2		PROFINET*2	
	Version*1	Ver. 1.10		Conformance Test Record V.1.1		PROFINET Specification Version 2.2	
	Configuration file*3	CSP+ file		XML file		GSD file	
I/O occupation area (Inputs/Outputs)		SMJ1: 32/32 SMJ3: 32/32 (1 station, remote I/O stations)	SMJ2: 32/32 SMJ4: 32/32 (1 station, remote I/O stations)	SEC1: 0/32 SEC3: 0/16	SEC2: 0/32 SEC4: 0/16	SPN1: 0/32 SPN3: 0/16	SPN2: 0/32 SPN4: 0/16
Applicable function		—				FSU, MRP	
Communication speed		156 k/625 k/2.5 M/5 M/10 Mbps		100 Mbps*2			
Communication connector specification		M12					
Terminating resistor switch		Built-in			None (Not required)		
Output	Output type	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)	Sink/NPN (Positive common)
	Number of outputs	SMJ1: 32 points SMJ3: 16 points	SMJ2: 32 points SMJ4: 16 points	SEC1: 32 points SEC3: 16 points	SEC2: 32 points SEC4: 16 points	SPN1: 32 points SPN3: 16 points	SPN2: 32 points SPN4: 16 points
	Load	Solenoid valve with surge voltage suppressor 24 VDC, 1.5 W or less (SMC)				Solenoid valve with surge voltage suppressor 24 VDC, 1.0 W or less (SMC)	
	Supplied voltage	24 VDC					
	Supplied current	SMJ1: Max. 2.0 A SMJ3: Max. 1.0 A	SMJ2: Max. 2.0 A SMJ4: Max. 1.0 A	SEC1: Max. 2.0 A SEC3: Max. 1.0 A	SEC2: Max. 2.0 A SEC4: Max. 1.0 A	SPN1: Max. 2.0 A SPN3: Max. 1.0 A	SPN2: Max. 2.0 A SPN4: Max. 1.0 A

*1 Please note that the version is subject to change.

*2 Use a CAT5 or higher communication cable for EtherCAT, PROFINET, Ethernet/IP™, and Ethernet POWERLINK.

*3 The configuration file can be downloaded from the SMC website: <https://www.smc.eu>

*4 Enclosure is IP40 when the communication connector is D-sub.

EX260 Series

Specifications

Model		EX260-SEN1/3	EX260-SEN2/4	EX260-SPL1	EX260-SPL3	EX260-SIL1	EX260-FPS1
Applicable system	Protocol	EtherNet/IP™*2		Ethernet POWERLINK		IO-Link	PROFINET/ PROFIsafe*2
	Version*1	Volume 1 (Edition 3.17) Volume 2 (Edition 1.18)		EPG DS 301 Version 1.2.0		V1.1	PROFINET Specification Version 2.3 PROFIsafe Specification Version 2.4
	Configuration file*3	EDS file		XDD file		IODD file	GSD file
I/O occupation area (Inputs/Outputs)		SEN1: 16/32 SEN3: 16/16	SEN2: 16/32 SEN4: 16/16	16/32	16/16	0/32 16/32*4	0/32*5
Applicable function		QuickConnect™, DLR		—		—	FSU, Shared Device, MRP
Communication speed		10 M/100 Mbps*2		100 Mbps*2		COM3/COM2*4	100 Mbps*2
Communication connector specification		M12					
Terminating resistor switch		None (Not required)					
Output	Output type	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)			
	Number of outputs	SEN1: 32 points SEN3: 16 points	SEN2: 32 points SEN4: 16 points	32	16	32	
	Load	Solenoid valve with surge voltage suppressor 24 VDC, 1.5 W or less (SMC)					Solenoid valve with surge voltage suppressor 24 VDC, 0.95 W or less (SMC)
	Supplied voltage	24 VDC					
	Supplied current	SEN1: Max. 2.0 A SEN3: Max. 1.0 A	SEN2: Max. 2.0 A SEN4: Max. 1.0 A	Max. 2 A	Max. 1 A	Max. 2 A	Max. 1.3 A

*1 Please note that the version is subject to change.

*2 Use a CAT5 or higher communication cable for PROFINET, PROFIsafe, EtherNet/IP™, and Ethernet POWERLINK.

*3 The configuration file can be downloaded from the SMC website: <https://www.smc.eu>

*4 A selection can be made using the setting switch.

*5 In addition, it occupies input 4 bite/output 5 bite for safety.